

COMMUNITY DEVELOPMENT DEPARTMENT

Code Administration Division 129 North Second Street, 2nd Floor Yakima, Washington 98901 (509) 575-6126 • Fax (509) 576-6576 codes@yakimawa.gov • www.buildingyakima.com

MANUFACTURED HOME PLACEMENT APPLICATION PACKET

MANUFACTURED HOME PERMITS

- All mobile homes, manufactured homes, and modular homes placed in the City of Yakima are required to have a placement permit. If the home proposed to be located is not a new home, please provide the original title or Auditors registration.
- Placement permit fees are based on the estimated cost of the placement of the manufactured home.
- For previously owned/titled manufactured homes, or for manufactured homes constructed prior to June 15, 1976, please contact City Planning to verify the land use review process that would be applicable for your permit: (509) 575-6183 or ask.planning@yakimawa.gov.
- A Plumbing Permit application is included in this packet for connecting to water and sewer.
 - A licensed plumbing contractor must be used unless the owner is doing the work themselves.
 In any case, a properly licensed contractor is required for any work taking place in the right-of-way or in a City utility easement.
 - You may contact the Code Administration to verify applicable water and/or sewer permit fees: (509) 575-6126 or codes@yakimawa.gov.
 - o If service is not available, the applicant will receive a copy of the application and plot plan to be taken to the Yakima Health District (1210 Ahtanum Ridge Dr, Union Gap, WA 98903; (509) 575-4040) to obtain drain field/septic tank clearance. If the property is served by Nob Hill Water, please contact their office at 6111 Tieton Dr or (509) 966-0272. If City or Nob Hill Water is not available, the applicant must contact Washington State Department of Ecology (1250 W Alder St, Union Gap, WA 98903; (509) 575-2490) to obtain approval/permits. A building permit cannot be issued without approval/verification that it can be served by utilities and that appropriate City, Yakima Health District and/or Department of Ecology permits have been obtained.
- Additions, covered porches, etc. require a separate building permit.
- Electrical permits are required from the Department of Labor and Industries (15 W Yakima Ave, Yakima, WA 98902; (509) 454-3760).
- Prior to demolition of any structures, contact the Yakima Regional Clean Air Agency for approval (329 N 1st St, Yakima, WA 98901; (509) 834-2050 or www.yakimacleanair.org).
- A Move Permit is required by the Yakima County Treasurer's Office (128 N 2nd St, Yakima, WA 98901). In order for their office to issue this permit, the applicant must provide proof a placement permit has been issued by the appropriate jurisdiction.



COMMUNITY DEVELOPMENT DEPARTMENT

Code Administration Division 129 North Second Street, 2nd Floor Yakima, Washington 98901 (509) 575-6126 • Fax (509) 576-6576 codes@yakimawa.gov • www.buildingyakima.com

Permit#_____

MANUFACTURED HOME BUILDING PERMIT APPLICATION YMC 11.06.020 – YMC 15.04.160

Site Address: Parcel #:								
Will 1 acre or more be cleared or graded? ☐ Yes ☐ No								
Is the Property Within the Flood Area? ☐ Yes ☐ No								
Describe work to be covered by this permit:								
Park Name (if applicable):								
Estimated cost for the placement of the man	ufactured home: \$							
OWNER/APPLICANT								
Owner Name:	Phone No.:							
Owner Address:								
Contact Person:	Contact Phone No.:							
Contact Email:								
MANUFACTURER AND DEALER OF	THE MANUFACTURED HOME:							
INSTALLER								
Installer Name:	Phone No.:							
Installer Address:	Email:							
Installer Certification No.:	Certif. Expiration Date:							
MANUFACTURED HOME INFORMA? 1) Size: □ Single Wide □ Double Wide								
2) Number of Bedrooms: 3) Nu	mber of Bathrooms:							
4) Year of Home: 5) Make:								
	8) Value (\$):							
9) Dimensions:								

Signature	Print Name	Date
I hereby certify under penalty of perjury of this application and know that the informat granting of a permit does not authorize me federal or local laws regulating the construc	ion contained herein is true and corn in any way to violate or cancel any o	rect. I understand that the f the provisions of state,
Declaration I hereby certify that (please select one): ☐ I am a CONTRACTOR or SPECIALTY defined under RCW 18.27.010 and 18.27.110 ☐ I am an AUTHORIZED AGENT of the properly licensed contractor or specialty contqualified to perform the work sought by this ☐ I am EXEMPT from the requirements of by all provisions and conditions of the exemplicensed contractors and/or specialized contrapplied for herein.	O and am legally qualified to perform property owner and all work will be director as defined under RCW 18.27.0 permit. the Contractor Registration laws, per perion as stated. I will do all of my own	the work sought by this permit. one by the property owner or a 010 and 18.27.110 and is legally RCW 18.27.090, and will abide a work or use all registered and
	·	
☐ Runner design	□ Tiedown layo	
☐ Mainframe pier loads and l☐ Perimeter pier loads and lo	· ·	pier loads and locations
 NOTE: If the manufacturer's in sheets, you must provide the fol project. 	lowing by circling the informat	, 5
show the address, unit number, structures are spaced a minimum. Manufacturer's Installation Instruction	name of manufactured home pan of 10 feet from the newly place	rk, and show that adjacent
plan must show relationship of access and utility easements, oth the City Planning Division to ve ask.planning@yakimawa.gov . • For units proposed to be placed	manufactured home to the proper ner structures and utilities (YMO crify zoning and setback require	erty lines, right-of-way, C 11.06.020 (C)). Contact ements: (509) 575-6183 or
Site PlanFor units proposed to be moved	to a lot that is not in a manufac	tured home park, the site
Original Title or Auditors Registration	on (if it is not a new unit)	
REQUIRED SUBMITTALS:		
11) Provide the address, city, state, an	nd zip code this manufactured h	nome is moving from:
10) Is this a previously titled manufacture **If yes, provide the original title		



COMMUNITY DEVELOPMENT DEPARTMENT

Code Administration Division 129 North Second Street, 2nd Floor Yakima, Washington 98901

Phone (509) 575-6126 • Fax (509) 576-6576 Email: codes@yakimawa.gov

all the same of th	PLUMBI	NG PERM	IT APPLICATION Permit#	#		
Job Address:	Parcel Number:					
Project Description:						
Estimated cost of the work to be pe	rformed (ma	terials and la	bor): \$			
(If cost of labor is not included, cost	of materials w	vill be doubled	<i>(</i>)			
Property C)wner		Contract	or		
Name:			Business Name:			
Address:			Address:			
City/State/Zip:			City/State/Zip:			
E-mail:			E-mail:			
Phone:			State Cont. Lic. #:			
Alt. Phone:			Phone:			
ITEM	EXISTING	NEW QUANTITY	ITEM	EXISTING QUANTITY	NEW QUANTITY	
Atmospheric Breaker	QUANTITI	QUANTITI	Mop Sink	QUANTITI	QUANTITI	
Backflow Device (RPBA or DCVA) <2"			Pretreatment Interceptor (Grease/Oil)			
Backflow Device (RPBA or DCVA) >2"			Repair/Alt. Drain/Vent Piping			
Bar Sink			Roof Drain			
Bathtub			Sewage Pump			
Clothes Washer			Sewer Repair/Replacement			
Dishwasher			Shower			
Drinking Fountain			Sink			
Floor Drain			Supplemental Permits			
Hose Bib			Urinal			
Kitchen Sink			Water Closet - Tank Type			
Kitchen Sink 3 Compartment			Water Closet – Flushometer Type			
Laundry Tray			Water Heater			
Lavatory (Basin)			Water Piping/Service			
Miscellaneous:	-		Sampling Port			
Declaration	<u>. </u>				l	
I hereby certify that (<u>please select one</u>): ☐ I am a CONTRACTOR or SPECIALTY C am legally qualified to perform the work s			red and properly licensed as defined under RC	CW 18.27.010 and	l 18.27.110 and	
☐ I am an AUTHORIZED AGENT of the p	property owner a	and all work will	be done by the property owner or a properly qualified to perform the work sought by this p		ctor or specialty	
	own work or use	e all registered a	ws, per RCW 18.27.090, and will abide by all and licensed contractors and/or specialized of			
I hereby certify under penalty of perjury information contained herein is true and	of the Laws of correct. I under	f the State of W rstand that the g	ashington that I have read and examined the granting of a permit does not authorize me in on or performance of construction sought und	any way to violat		
Signature			Print Name	Dat	:e	

THE FOLLOWING 6 SHEETS ARE ONLY APPLICABLE FOR UNITS WHERE THE MANUFACTURER'S INSTALLATION INSTRUCTIONS ARE NO LONGER AVAILABLE.

Circle the information that applies to your project.

Table 3-1 - General Description of Solls

Soil Type Based on the unified classification system	Allowable Pressure (pounds per square foot) No allowances made for overburden pressure, embedment depth, water table height, or settlement problems		
Rock or hard pan	4,000 and up		
Sandy gravel and gravel	2,000		
Sand, silty sand, clayey sand, silty gravel, or clayey gravel	1,500		
Clay, sandy clay, silty clay, or clayey silt	1,000		
Uncompacted fill	Special analysis is required		
Peat or organic clays	Special analysis is required		

NOTE -

- 1. To be used only when none of the following is available: soils investigation and analysis of the site; compliance with the local building code; and evaluation by a registered professional engineer, architect, or building official.
- 2. Hereafter, the words "engineer" or "architect" shall refer to a registered professional engineer or architect.

Table 4-1 – Minimum Pier Capacity Frame Plus Perimeter Blocking (Both Frame and Perimeter Blocking Required)

Section Width (feet)	Roof Live Load (pounds per square foot)	Pier Location	Minimum Pier Capacity (pounds) Maximum Pier Spacing (feet)			
			4	6	В	10
8	20	Frame	900	1300	1800	2200
		Perimeter	600	800	1100	1400
	30	Frame	900	1300	1800	2200
		Perimeter	700	1100	1400	1800
	40	Frame	900	1300	1800	2200
		Perimeter	900	1300	1800	2200
10	20	Frame	1100	1700	2200	2800
		Perimeter	700	1100	1400	1800
	30	Frame	1100	1700	2200	2800
		Perimeter	900	1400	1800	2300
	40	Frame	1100	1700	2200	2800
		Perimeter	1100	1700	2200	2800
12	20	Frame	1300	1900	2600	3200
		Perimeter	800	1200	1600	2000
	30	Frame	13.00	1900	2600	3200
		Perimeter	1100	1600	2100	2600
	40	Frame	1300	1900	2600	3200
		Perimeter	1300	1900	2600	3200
14	20	Frame	1500	2200	3000	3700
		Perimeter	900	1400	1900	2400
	30	Frame	1500	2200	3000	3700
		Perimeter	1200	1800	2400	3000
	40	Frame	1500	2200	3000	3700
		Perimeter	1500	2200	3000	3700
16	20	Frame	1700	2600	3400	4300
		Perimeter	1100	1600	2200	2700
	30	Frame	1700	2600	3400	4300
1	50	Perimeter	1400	2100	2800	3500
	40	Frame	1700	2600	3400	4300
1	40	Perimeter	1700	2600	3400	4300
18	20	Frame	1900	2900	3900	4800
10	20	Perimeter	1200	1800	2500	3100
	20	Frame	1900	2900	3900	4800
1	30	Perimeter	1600	2400	3200	3900
	40				3900	4800
1	40	Frame Perimeter	1900 1900	2900 2900	3900	4800

Table 4-2 - Minimum Pier Capacity Multisection Center-Beam Blocking

Section Width (feet)	Roof Live Load (pounds per square foot)		Pier Lo	ad and Mi	nlmum Pi	er Capacity	/ (pounds)	
l .				Mating	Wall Ope	ning (feet)		
		5	10	15	20	25	30	35
8	20	600	1200	1800	2400	3000	3600	4200
	30	800	1600	2400	3200	4000	4800	5600
	40	1000	2000	3000	4000	5000	5000	7000
10	20	800	1500	2300	3000	3800	4500	5300
	30	1000	2000	3000	4000	5000	6000	7000
	40	1300	2500	3800	5000	6300	7500	8800
12	20	900	1800	2600	3500	4400	5300	6100
	30	1200	2300	3500	4700	5800	7000	8200
	40	1500	2900	4400	5800	7300	8800	10200
14	20	1000	2000	3000	4100	5100	6100	7100
	30	1400	2700	4100	5400	6800	8100	9500
	40	1700	3400	5100	6800	8400	10100	11800
16	20	1200	2300	3500	4700	5800	7000	8100
	30	1600	3100	4700	6200	7800	9300	10900
	40	1900	3800	5800	7500	9700	11600	13600

EXAMPLE: 14-foot section width

30-pounds-per-square-foot roof live load

18-foot-wide mating-wall opening

Follow down the "Section Width" column to "14 feet." Follow across to "30 pounds per square foot" (psf) in the "Roof Live Load" column. Since the mating wall opening is 18 feet wide, follow across to the column headed "20." (For any opening width that is not shown, use the next highest number on the chart.) The required pier capacity is 5,400 pounds.

Table 4-3 - Footing Size1.2

Pier-	Min	imum Footing Size	or Equal Area (incl	hes)		
Capacity	Soil Capacity					
(pounds.)	1000 psf ³	1500 psf ³	2000 psf3	4000 psf3		
600	9 x 9	8 x 8	7 x 7	5 x 5		
800	11 x 11	9 x 9	8 x 8	5 x 5		
1000	12 x 12	10 x 10	8 x 8	6 x 6		
1500	15 x 15	12 x 12	10 x 10	7 x 7		
2000	17 x 17	14 x 14	12 x 12	8 x 8		
2500	19 x 19	15 x 15	13 x 13	10 x 10		
3000	21 x 21	17 x 17	15 x 15	11 x 11		
3500	22 x 22	18 x 18	16 x 16	12 x 12		
4000	24 x 24	20 x 20	17 x 17	13 x 13		
4500	25 x 25	21 x 21	18 x 18	13 x 13		
5000	27 x 27	22 x 22	19 x 19	14 x 14		
5500	28 x 28	23 x 23	20 x 20	15 x 15		
6000	29 x 29	24 x 24	21 x 21	15 x 15		
6500	31 x 31	25 x 25	22 x 22	16 x 16		
7000	32 x 32	26 x 26	22 x 22	16 x 16		
7500	33 x 33	27 x 27	23 x 23	17 x 17		
8000	34 x 34	28 x 28	24 x 24	17 x 17		
8500	35 x 35	29 x 29	25 x 25	18 x 18		
9000	36 x 36	29 x 29	25 x 25	19 x 19		
10000	38 x 38	31 x 31	27 x 27	20 x 20		
11000	40 x 40	32 x 32	28 x 28	21 x 21		
12000	42 x 42	34 x 34	29 x 29	22 x 22		
13000	43 x 43	35 x 35	31 x 31	22 x 22		
14000	45 x 45	37 x 37	32 x 32	23 x 23		
15000	46 x 46	38 x 38	33 x 33	24 x 24		
16000	48 x 48	39 x 39	34 x 34	25 x 25		
17000	49 x 49	40 x 40	35 x 35	25 x 25		
18000	51 x 51	42 x 42	36 x 36	26 x 26		
19000	52 x 52	43 x 43	37 x 37			

NOTE -

- 2. Local regulations may require design verification by an engineer.
- 3. psf -- pounds per square foot

^{1.} The footing sizes shown are for square pads and are based on the area (square inches) required for the load. Other footing configurations, such as a rectangular configuration, may be used, provided the area (square inches) is equal to or greater than the area of the square footing shown in the lable. For example, a 12-inch x 22-inch (264-square-inch) footing may be used in place of a 16-inch x 16-inch (256-square-inch) footing. Also, two 12-inch x 24-inch pads may be used in place of one 24-inch x 24-inch pad.


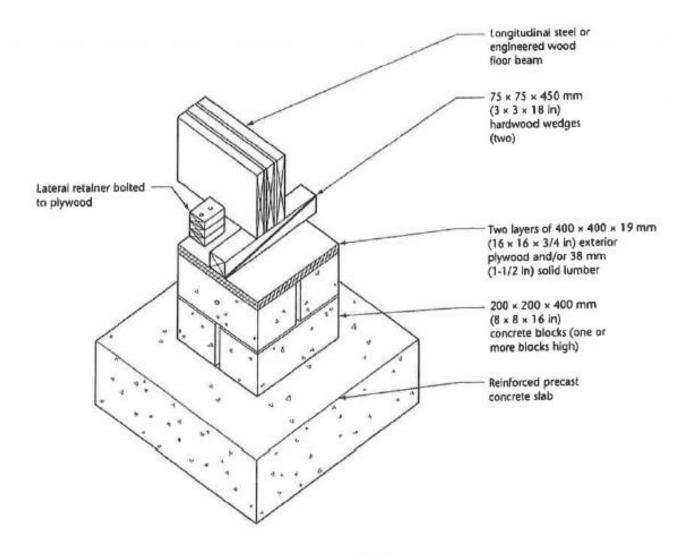


Figure B.4
Concrete block surface foundation system

(See Clause B.6.)

inches) is equal to or greater than the area of the square footing shown in the lable. For example, a 12-inch x 22-inch (264-square-inch) footing may be used in place of a 16-inch x 16-inch (256-square-inch) footing. Aiso, two 12-inch x 24-inch pads may be used in place of one 24-inch x 24-inch pad.

- 2. Local regulations may require design verification by an engineer.
- 3. psf -- pounds per square foot

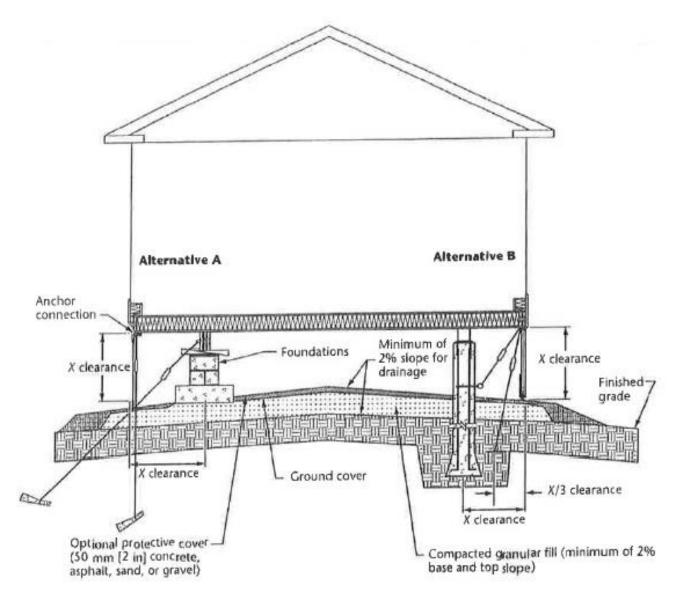

Notes:

- (1) The ultimate capacity of anchors and connections to the unit should be not less than 17.8 kN (4000 lb), with the anchors located not more than 1200 mm (4 ft) from the ends and spaced not more than 3660 mm (12 ft) on-centre along the sides of the unit.
- (2) Anchors should connect directly to wall studs to provide maximum restraint ugainst uplift of the wall.
- (3) Anchors should be tightened to a minimum force of 13.35 kN (3000 lb) before adjustment to allow stack in the anchor cables.
- (4) For Alternative A, the slack should not exceed 75 mm (3 in) for diagonal cables and 50 mm (2 in) for vertical cables.
- (5) For Alternative 8, the slack in the cables should not exceed 50 mm (2 in), although no slack is preferable.
- (6) For non-tornado areas, the spacing between anchors may be increased to 7320 mm (24 ft).

Figure C.5 Anchorage for tornado protection

(See Clause C.4.)



CITY OF YAKIMA SITE PLAN CHECKLIST



For Land Use Review & Building Permits

Site plans required for land use review and building permits shall include the items listed below.

Sections from the Yakima Municipal Code are referenced by some items to help guide applicants. This is not a comprehensive list. View the full Yakima Municipal Code here: https://www.codepublishing.com/WA/Yakima/

☐ Property address, parcel number, and zoning designation;
\square Legal description of the land;
\square North arrow and scale of drawing;
\square Name of applicant, phone number, signature of property owner and project name;
\square Actual dimensions and shape of the lot to be built upon;
\square Sizes and location of existing structures on the lot to the nearest foot;
\square Location and dimensions of proposed structures and uses;
☐ All structure setbacks (YMC § 15.05.030);
☐ Lot coverage calculations (<u>YMC § 15.05.020(C)</u>);
☐ Clearview triangle (<u>YMC § 15.05.040</u>);
\square Size and location of proposed and existing utility easements and other easements;
☐ Location and size of required site drainage facilities including on-site retention;
☐ Adjacent Right-of-Way dedication and frontage improvements;
\square Distance(s) of structures to property line and to the centerline of the Right-of-Way (YMC §15.05.030, Table 5-1);
\square Location of ingress and egress, including curb cuts intersecting with streets and dimensions of proposed or existing driveways (YMC § 15.06.065);
☐ Location and size of parking stalls with accessible parking spaces and aisles identified (YMC Ch. 15.06);
☐ Location of electric vehicle (EV) infrastructure;
☐ Parking circulation plan with proposed landscaping and sitescreening (YMC Ch. 15.06);
☐ Location and size of new or existing loading spaces (YMC § 15.06.130);
☐ Proposed and existing signage (YMC Ch. 15.08); and
☐ Proposed or existing mailbox location.
A site plan for development in the floodplain overlay shall also include the following information:
\square Size and location of floodplain and floodway on the lot;
\square Elevation in relation to the one-hundred-year flood level of the lowest floor (including basement) of all structures;
\square Elevation in relation to mean sea level of any structure that has been floodproofed;
☐ Certification by a registered professional engineer or architect that established floodproofing standards have been met;
☐ Description of the extent to which any watercourse will be altered or relocated as a result of the proposed development; and
☐ Any other site plan requirements identified in YMC Ch. 15.27 Part Four.

Additional information may be requested. Projects requiring work in the public right-of-way or involving city water main lines or sewer main lines will be required to submit civil plans to the Engineering Division for review.