

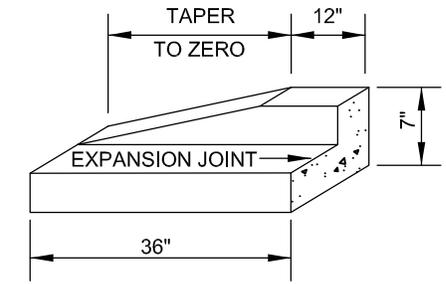
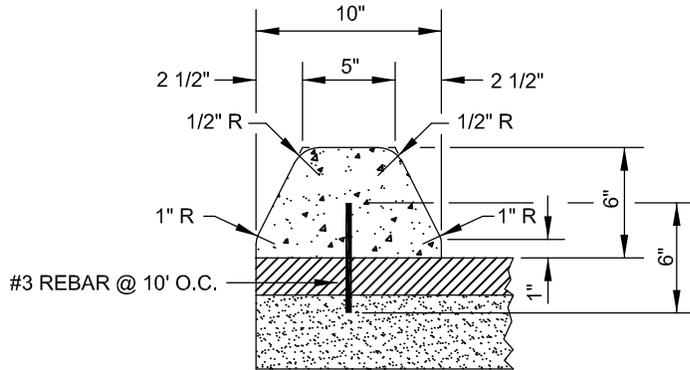
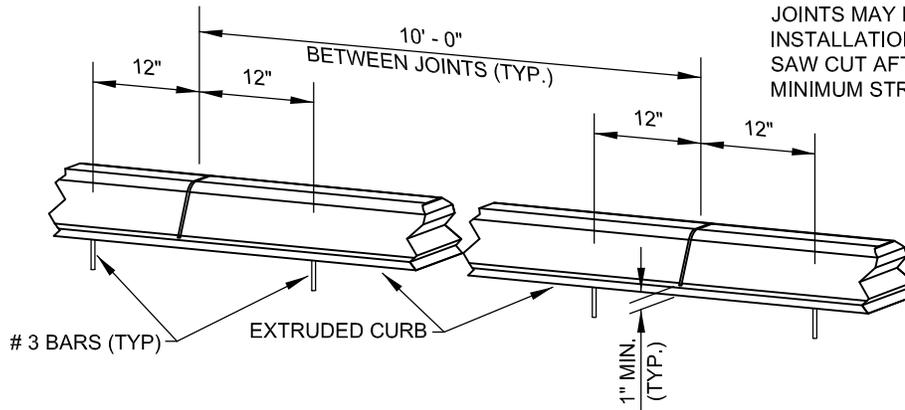


NOTE
 JOINTS MAY BE FORMED DURING
 INSTALLATION USING A RIGID DIVIDER OR
 SAW CUT AFTER CONCRETE CURES TO
 MINIMUM STRENGTH.

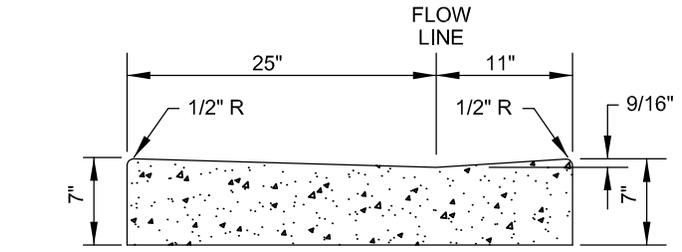

CURB TERMINAL END

CEMENT CONCRETE EXTRUDED CURB

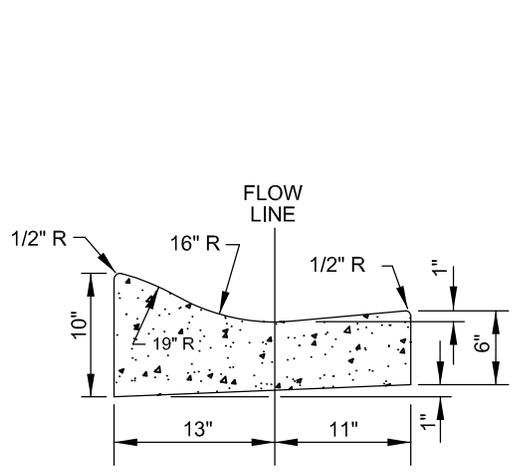

CEMENT CONCRETE VALLEY GUTTER

CEMENT CONCRETE ROLLED CURB

NOTES:

1. WSDOT CLASS 3000 CONCRETE WITH COARSE AGGREGATE GRADING NO. 5.
2. EXCAVATION LIMITS ARE 6" BEHIND AND 6" IN FRONT FOR REMOVING AND REPLACING EXISTING CURB & GUTTER.
3. ROLLED CURB MAY BE PERMITTED ALONG RESIDENTIAL ROADWAYS ONLY AND MUST BE APPROVED BY THE CITY ENGINEER.



City Of Yakima
 Engineering Division
 129 North Second Street
 Yakima, Washington

City of Yakima - Standard Detail
CEMENT CONCRETE CURB

R1

NOT TO SCALE
 Revision 11-2008