



NOTES:

- PRECAST ADJUSTMENT SECTIONS SHALL BE LEVELED
 WITH GROUT ONLY. SECTIONS SHALL BE FINISH GROUTED
 INSIDE AND OUT AND SHALL BE INSPECTED BY THE CITY
 ENGINEER PRIOR TO BACKFILL. NO WOOD SHIMS SHALL BE
 ALLOWED.
- PIPES TO BE GROUTED IN PLACE. GROUT SHALL BE NON-GYPSUM TYPE GROUT AS APPROVED BY THE CITY ENGINEER.
- 3. NO PRIVATE LINE CONNECTIONS SHALL BE MADE INTO MANHOLES.
- 4. BASE IS TO BE CAST-IN-PLACE UTILIZING CL 4000 CONCRETE.

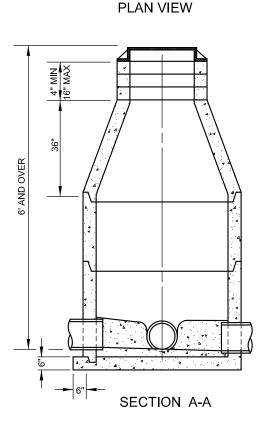

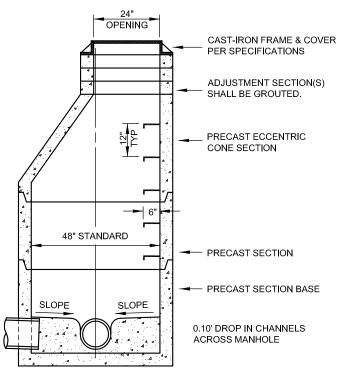

Yakima, Washington

SECTION B-B