

CITY OF YAKIMA STANDARD METER COVER & RING FURNISHED BY THE CITY

METER TO BE PROVIDED BY CITY

FINISHED GROUND

36" x 18" DIA. WHITE PVC METER TILE

ANGLE BALL VALVE 1"-BA43-444W-NL (INCOMING)

ALL BACKFILL MATERIALS SHALL BE COMPACTED PRIOR TO SETTING THE METER TILE

2"x8"x16" PATIO BLOCK (TYP)

16 GAUGE INSULATED SOLID COPPER TRACING WIRE STRAPPED TO POLYETHYLENE TUBING & CONNECT TO SET SCREW ON PACK NUT OF CORP. STOP & RABV.

FLOW →

ATTACH PIPE TO 5' METAL POST W/ NYLON ZIP-TIES.

18" - 24"

1" ANGLE METER ADAPTER FORD MODEL L34-44NL OR APPROVED EQUAL

5' MIN.


DIELECTRIC COUPLING REQUIRED WHEN USING METALLIC PIPE

CITY OF YAKIMA TO PROVIDE 3/4" X 1" METER ADAPTER FOR ALL 3/4" METERS.

5' OUT LEG REQUIRED W/ FITTING

NOTES

1. USE POLYETHYLENE TUBING.
2. WHEN USING POLYETHYLENE TUBING A BENDING SUPPORT MUST BE USED AT ALL 90° BENDS.
3. WHEN USING POLYETHYLENE TUBING AN INTERNAL TUBING STIFFENER MUST BE USED ON ALL FITTINGS.

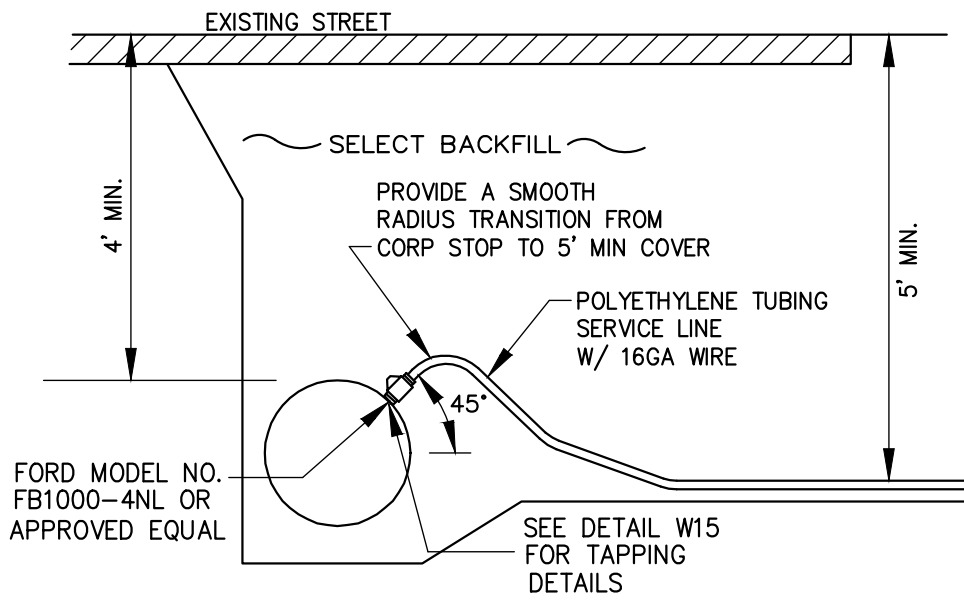

SERVICE LINE W/O METER DETAIL



City Of Yakima
Engineering Division

129 North Second Street
Yakima, Washington

City of Yakima - Standard Detail
3/4" & 1" METER INSTALLATION

NOT TO SCALE
Revision 1-2025

W14