
Yakima, WA

Pavement Management Report

June 2022





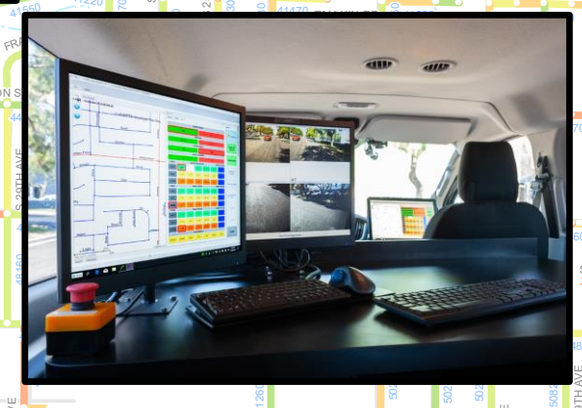

Infrastructure Management Services

TABLE OF CONTENTS

1.0	**EXECUTIVE SUMMARY**		**1**
	1.1.	**Project Overview**	**1**
	1.2.	**Results**	**2**
	1.3.	**Findings and Recommendations**	**3**
2.0	**PRINCIPLES OF PAVEMENT MANAGEMENT**		**4**
	2.1.	**Foreword**	**4**
	2.2.	**Pavement Management Principles**	**4**
	2.3.	**Pavement Management Program**	**6**
	2.4.	**ESA Pavement Management System**	**6**
	2.5.	**Pavement Condition Survey**	**9**
	2.6.	**Field Survey Methodology**	**14**
	2.7.	**Data Quality Assurance**	**15**
	2.8.	**Summary**	**16**
3.0	**PAVEMENT CONDITION SURVEY RESULTS**		**17**
	3.1.	**Foreword**	**17**
	3.2.	**City Street Inventory and Condition Summary**	**17**
	3.3.	**City Network Condition Imagery**	**18**
	3.4.	**City Network Condition Distribution**	**25**
	3.5.	**Condition By Pavement type and Functional Classification**	**26**
	3.6.	**Structural and Load Associated Distress Analysis**	**28**
	3.7.	**Summary**	**28**
4.0	**REHABILITATION PLAN AND BUDGET DEVELOPMENT**		**29**
	4.1.	**Foreword**	**29**
	4.2.	**Key Analysis Set Points and Assumptions**	**29**
	4.3.	**Network Budget Analysis Models**	**31**
	4.4.	**Post Rehabilitation Condition**	**35**
	4.5.	**Summary**	**35**
5.0	**PROJECT RECOMMENDATIONS AND COMMENTS**		**36**
	5.1.	**Project Summary and Recommendations**	**36**
	5.2.	**Closing**	**36**

APPENDED REPORTS **Following Page 37**

Appendix A **Street Inventory and Condition Summary**

Appendix B **$2.7M/Yr. Street Rehabilitation Program by Segment**

Appendix C **Full-Sized Maps**

APPENDED MAPS

Pavement Type by Segment

Functional Class by Segment

Pavement Condition Rating by Segment Using Descriptive Terms Assembled Projects

$2.7M/Yr Rehab Plan Budget

$2.7M/Yr Post Rehab PCI Map

1.0 EXECUTIVE SUMMARY

1.1. Project Overview

In August of 2021, IMS deployed a state-of-the-art Road Surface Tester (RST) (shown in **Figure 1**) to Yakima (City) to capture continuous, high-resolution pavement cracking, rutting, and roughness data on 356 centerline miles of asphalt and concrete roadways. Collected data were entered into the Easy Street Analysis™ (ESA) pavement management system and representative pavement condition scores were determined for each roadway segment. The ESA pavement management system was used to develop multi-year pavement maintenance and rehabilitation (M&R) recommendations that are included in this report.

The Pavement Condition Index (PCI) method was used in assessing the condition of the City. Widely used in the industry, the PCI method is an objective and repeatable approach to assessing the pavement condition. Based on the PCI results, ESA prioritizes funding using a cost-of-deferral approach, recommending M&R activities that optimize funding by selecting rehabilitation candidates only when they are approaching the critical point where a heavier maintenance activity will soon be needed to restore the roadway to full service.

The analysis and data presented in this report are based on the inspections performed by IMS, available work history, and other assumptions elaborated in the report. The information presented in the Executive Summary is condensed from various sections of this report. It is essential that reviewers familiarize themselves with the detailed information provided in subsequent sections of this report prior to making any specific decisions based on these results.



Figure 1 - IMS Road Surface Tester (RST)

1.2. Results

PCI values provide an indication of the surface conditions and structural integrity of a pavement. The 0 to 100 PCI range is commonly divided into various categories using descriptive terms. Divisions between the terms are not fixed but are meant to reflect common perceptions of pavement conditions. **Table 1** shows the categories chosen to represent the City's PCI assessment criteria, which includes typical pavement distresses and M&R needs within each category.

Table 1. City of Yakima's pavement condition categories.

Category	Typical Distresses and M&R Recommendations	PCI Range
Excellent	Like new condition – little to no maintenance required Monitor condition or preventive maintenance.	85-100
Very Good	Minor cracking, raveling, and other non-load associated distress Routine or preventive maintenance. *E.g., Crack sealing, surface treatment*	70-85
Good	Minor to moderate cracking and low severity load associated distresses such as alligator cracking and rutting. Surface treatments with localized repairs and overlays *E.g., Surface treatments, localized surface patching, thin overlay*	60-70
Fair	More extensive and severe longitudinal and transverse cracking, as well as moderate severity load associated distresses Localized repairs or major rehabilitation. *E.g., Localized surface and/or full-depth patching, moderate overlays*	50-60
Marginal	Localized high-severity alligator cracking, and rutting. Major rehabilitation. *E.g., Localized full-depth patching, mill and overlay, traditional overlay*	40-50
Poor	A greater extent of severe alligator cracking, rutting Major rehabilitation. *E.g., Localized full-depth patching, mill and overlay, traditional overlay*	25-40
Very Poor	Extensive and severe alligator cracking, more extensive and deeper rutting, and potholes. Major rehabilitation. *E.g., Full-depth reclamation, reconstruction*	0-25

At the time of the IMS 5-year analysis (5/22/2022), the City's roadways were found to be in good condition **with an average PCI of 64**. The PCI for sections that received M&R work after IMS's inspection was reset to 100. Approximately 36% of the City's roadways were found to be in very good or excellent condition. These pavements are candidates for more cost-effective pavement preservation treatments. Pavements with a PCI below 40 (i.e., pavements in poor or very poor condition) comprise the City's partial or full reconstruction "backlog". At the time of analysis, the **City's backlog was found to be approximately 6%.** A breakdown of the condition distribution of the City is shown in **Figure 2**. Detailed information on pavement conditions can be found in section 3.

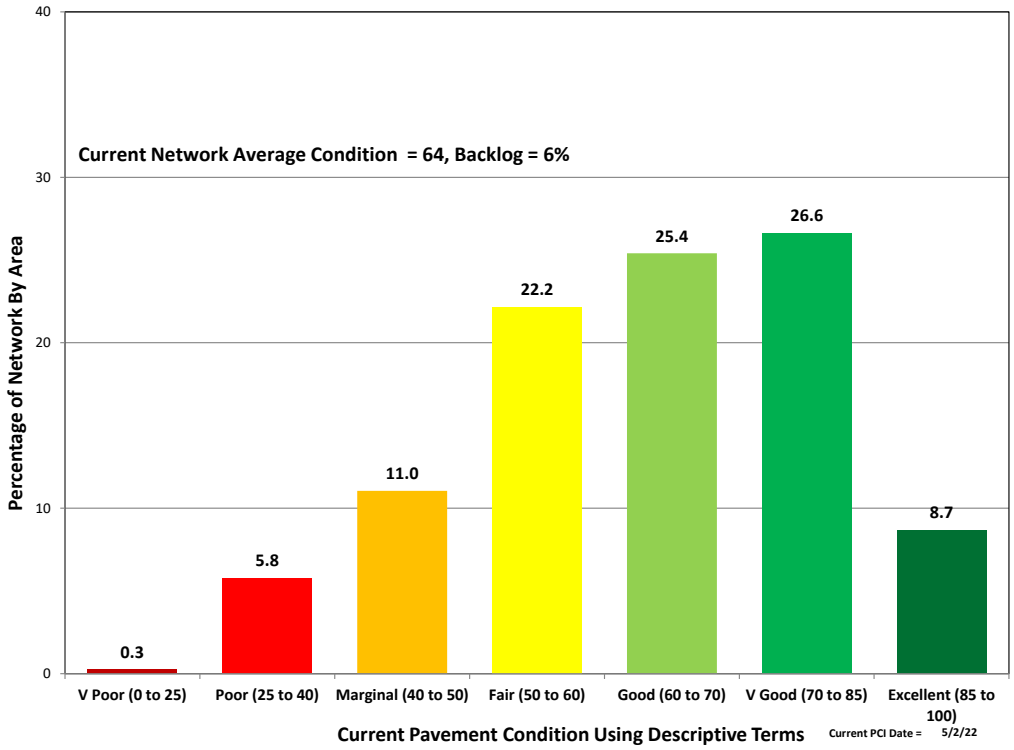


Figure 2 - Pavement Condition Overview

1.3. Findings and Recommendations

For the City to get the most return on investment from the ESA Pavement Management System, IMS presents the City with the following findings and recommendations:

- The City's network-level PCI is within the national average range at 64, and the backlog represents 6% of the network which is considered a manageable backlog.
- Focus on the restoration of roads in the "Marginal" PCI range through the use of strategic overlays to maintain the City's low backlog. Retaining a low backlog, allows the City to free up funds for inexpensive pavement preservation activities, such as slurry and chip seals.
- Concentrate M&R activity on critical PCI candidates. ESA recommendations produce optimal results when maintenance work is focused on roads that are at their "Critical PCI" point.
- Current $2.7M/Yr. budget will achieve a PCI of 60 and a backlog of 13% after the 5-year budget horizon. (Detailed funding models are presented in section 4)

2.0 PRINCIPLES OF PAVEMENT MANAGEMENT

2.1. Foreword

This section will cover the basics of pavement management, discussing the purpose of pavement management as well as best practices for M&R planning as they relate to the lifecycle of a pavement. It will explain how these concepts interact within the ESA pavement management system that was implemented and will provide context for the findings and recommendations within the report.

2.2. Pavement Management Principles

Pavement management is the process of assessing, prioritizing, and preserving or rehabilitating pavements through a logical system that attempts to use available funds in the most cost-effective manner possible. It is generally an iterative process that grows in accuracy as more data becomes available to better refine prediction models. **Figure 3** illustrates that, typically, pavements start deteriorating rapidly once they hit a specific threshold. A nominal investment in cheaper preventive maintenance (e.g. surface treatments) at 40% lifespan is much more effective than deferring maintenance until heavier reactive rehabilitations (e.g. overlays or possibly reconstruction is required just a few years later. Streets that are repaired while in good condition will have an extended lifetime and will cost less over their lifetime than those left to deteriorate to a poor condition. Without an adequate routine pavement maintenance program, streets will require more frequent reconstruction, thereby requiring exponentially greater funding.

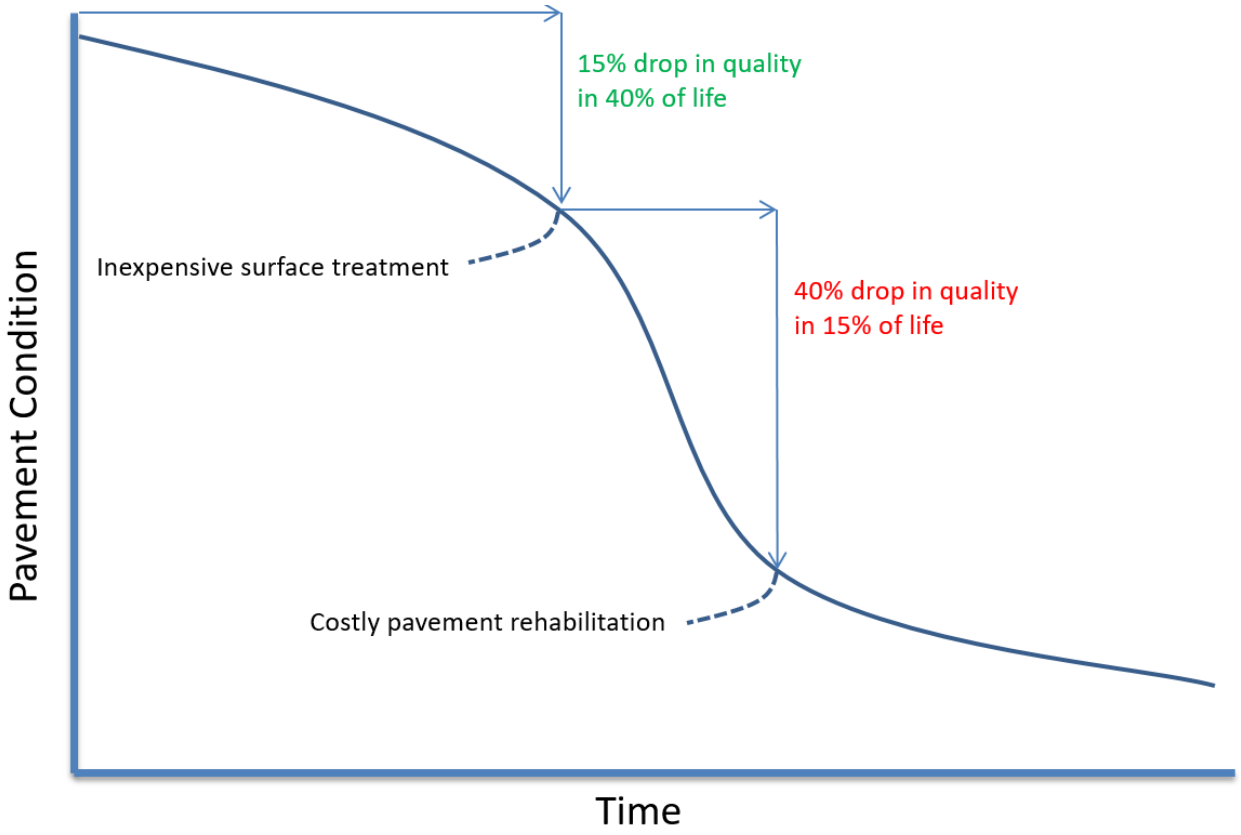


Figure 3 - Pavement Deterioration and Life Cycle Costs

The types of rehabilitation activities that the City chooses to deploy can have a significant effect on the longevity of a pavement. Depending on the target zone in which a pavement falls, a detailed rehabilitation strategy set needs to be formed. Common rehabilitation types include Stop Gap, Rehabilitation, Reconstruction, and Preventive Maintenance. It is the proper incorporation and application of the final category that a pavement management program tries to leverage. Popular examples of cost-effective preventive activities include:

- Crack and Joint Sealing
- Microsurfacing
- Rejuvenating agents
- Patching
- Fog, Slurry, and Chip Seals
- Thin Overlays

These activities help maintain and repair the surface integrity which can slow deterioration and depending on the treatment, also extend the life of a pavement. The outcome of this exercise is the long-term cost savings and an increase in network-level pavement quality over time. **Figure 4** illustrates the concept of extending pavement life through the application of timely M&R activities.

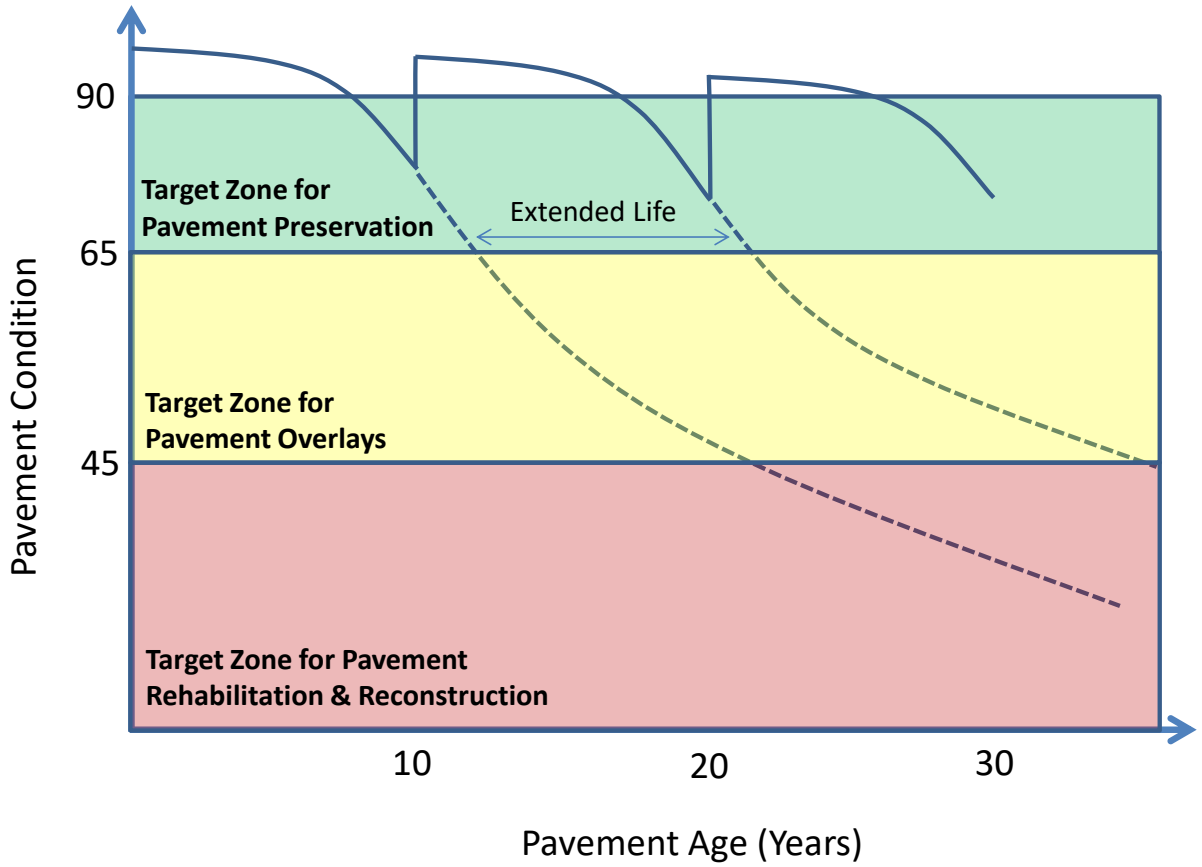


Figure 4 - Pavement Life Cycle Curve

The best method to obtain the most optimal usage of available funds or to determine the required funding to achieve a predetermined level of service is through the use of a pavement management system. An effective pavement management system can assist agencies in developing an organized catalog of pavement assets, store periodic condition assessments, track spending and costs, compare trends in data, and assess the effectiveness of maintenance activities and new technologies.

2.3. Pavement Management Program

The practical implementation of a pavement management program requires that an agency have an accurate understating of the assets under its management. To fulfill this requirement IMS was contracted by Yakima, WA to conduct a comprehensive pavement condition assessment and pavement management analysis on the City's roadway network.

2.4. ESA Pavement Management System

The City primarily utilizes Easy Street Analysis™ (ESA) for its pavement management program. ESA is a proprietary spreadsheet-based software alternative developed by IMS. It is intended to be easy to use while still offering all of the capabilities of a standalone software package. ESA will allow the city to catalog, classify, assess, track, and analyze condition data to aid in the processes of budget planning and pavement rehabilitation.

More specifically the program will help the City through the process of pavement management by giving structure to the basic information required for a management system:

- Pavement Section Inventory
- Pavement Deterioration Modeling
- Prioritization
- Funding Analysis
- Inspection Data
- Rehabilitation Selections & History
- Work Planning
- Reporting

The following pages will briefly detail the reasoning behind why this information is collected and used within the management program.

Pavement Section Inventory

An accurate inventory of all City-owned streets is necessary to make any determinations, assumptions, or projections within a management system. The individual attributes about length, width, location, traffic use, surface type, condition, and other factors that may be tracked are all tied back to a single management segment within ESA and given a unique ID within the program. The attributes stored here determine what types of rehabilitation activities can be applied, how the section is prioritized within the system, and allow for placement and sorting during reporting.

Inspection Data

ESA has the ability to use a blended condition index depending on the goals and requirements of the City which allows a custom reporting value to be built that is representative of aspects being considered to rank the condition of a pavement. The inputs for this index rely on inspection data from the field survey. In addition to the data collected for PCI, International Roughness Index (IRI) data was also made available within ESA. Details on the individual components of the inspection are available in section 2.5

Pavement Deterioration Modeling

Inspection data by itself is only able to represent conditions at the time of collection. Within ESA there are customizable curves that predict the rate of surface deterioration based on a streets functional class, pavement type, and strength rating. The guiding concept is that pavements with like uses and attributes will deteriorate at similar rates. As such, high volume asphalt arterials in already poor conditions would be expected to deteriorate faster and are represented in **Figure 5** below with a purple line. On the opposite end of the spectrum, low volume concrete local streets would be expected to deteriorate slowly and are represented with a blue dashed line.

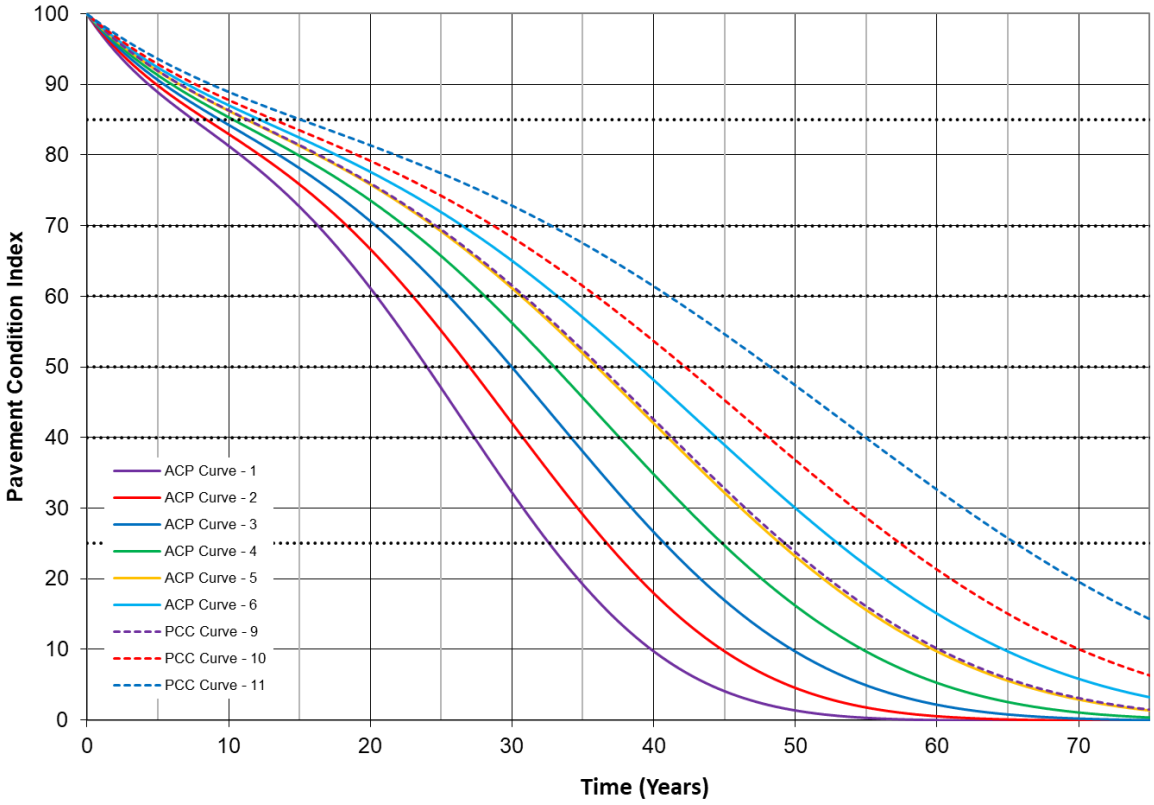


Figure 5 - Pavement Deterioration Curves

Maintenance and Rehabilitation Work Selection

ESA uses a set of protocols that allow for activities to be assigned to PCI ranges based on filter criteria that give the City the ability to create detailed rehabilitation strategy sets for each functional class and pavement type according to the best practices determined for that pavement.

As planned rehabilitation work is completed, a record of the work should be added to the pavement management system. This ensures that conditions are up to date for future selections and creates a repository of information to aid in planning.

Prioritization

Within ESA the option is available to prioritize pavement projects for rehabilitation based on six main criteria: PCI, Cost of Deferral, Pavement Strength, Pavement Type, Functional Class, and the Area of a segment. Depending on the goals set forth at the beginning of the project these criteria can be weighted differently based on their definition to create an overall priority factor for a project. Additional details on these factors are available in section 4.2.

Project planning

The ability to plan work as needed allows the management program to better reflect the realities of a paving program. Certain constraints may be applied to funds that require their use within a certain year and activities relating to other assets may dictate the time and type of work to be performed. ESA allows for predefined projects to be entered into the management plan to account for work that is known. This

ensures that the final outcome is consistent with overall city planning and accurately reflects current funding allocations.

In terms of pavement management efficiency, a program based on worst-first, that is starting at the lowest rated street and working up towards the highest, does not achieve an optimal expenditure of funds. Generally, under this scenario, agencies can not sufficiently fund pavement rehabilitation and lose ground despite injecting large amounts of capital into the network.

The preferred basis of rehabilitation candidate selection is to examine the cost of deferral of a street, against increased life expectancy.

Funding analysis

The actual process of determining where and when to spend funds is a function of inputs mentioned in the section. Information from the street section inventory, condition survey, deterioration modeling, rehabilitation activity protocols, prioritization, and project planner are all assessed to predict the outcomes of funding scenarios. These can either be goal-based or budget-based. A more detailed description is available in Section 5.

Reporting

ESA has the ability to generate basic reports for common data requests through a set of predefined layouts. This allows for quick access to section condition summaries, inspection data, budget scenario summaries, and data charts. The GIS data used to generate this report is also linked to the section summary information to allow for quick and easy visualizations of the data if imported into a GIS utility. An example of ESA data can be seen in **Figure 6**.

Street Inventory and Five Year Rehabilitation Plan By Year — $2600k/Year Rehabilitation Plan — Analysis Start Date: 9/1/2021

IMS Easy Street Analysis

GISID	Agency ID	Street Number	Block Number	Street Prefix	On Street	From Street	To Street	FunCL Code	Pavetype Code	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Pavement Cndtn Index (PCI)	Project ID	Project Length (ft)	Project Current PCI	Year of First Rehab	Segment Rehab Results	Rehab Activity Code	Rehab Activity	Avg Unit Rate ($/yd2)	Peripheral Concrete Costs ($)	Segment Pavement Cost ($)	Segment Total Cost ($)	Whole Project Cost ($)	5 Year Post Rehab PCI
1295	1010	17			04TH ST	PICO BL	BAY ST	2	1	62	368	127	2,660	43	1780	738	42	1	Selected Yr 1	50	FWM + Thick Overlay (> 2.0 - 3.0)	60.50	0	160,930	160,930	223,669	89
1300	1010	18			04TH ST	BAY ST	BICKNELL AV	2	1	24	370	49	1,037	45	1780	738	42	1	Selected Yr 1	50	FWM + Thick Overlay (> 2.0 - 3.0)	60.50	0	62,739	62,739	223,669	89
1655	1025	1			07TH ST	CITY LIMIT - LA	AELAIDE PL	2	1	36	141	28	592	81	2900	141	80	1	Selected Yr 1	10	Slurry Seal / Seal Coat	2.40	0	1,421	1,421	1,421	80
1810	1025	32			07TH ST	OZONE ST	CITY LIMIT - LA	2	1	36	67	13	282	73	3620	67	72	1	Selected Yr 1	20	Slurry Seal / Seal Coat	7.75	0	2,186	2,186	2,186	84
3610	1115	9			26TH ST	MARGUERITA AV	ALTA AV	1	1	46	782	200	4,194	60	8060	1,391	62	1	Selected Yr 1	26	Slurry Seal / Seal Coat + Strctrl Ptch	9.75	0	40,892	40,892	73,447	83
3615	1115	10			26TH ST	ALTA AV	MONTANA AV	1	1	47	609	159	3,339	67	8060	1,391	62	1	Selected Yr 1	26	Slurry Seal / Seal Coat + Strctrl Ptch	9.75	0	32,555	32,555	73,447	83
4915	1290	1			CLOVER ST	ASHLAND AV	PER AV	5	1	40	360	80	1,678	28	9180	360	27	1	Selected Yr 1	56	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.50	0	94,807	94,807	94,807	91
4515	1240	4			BROADWAY	5TH ST	6TH ST	2	1	47	399	104	2,187	30	10140	399	29	1	Selected Yr 1	56	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	65.00	0	142,155	142,155	142,155	90
4700	1250	4			CALIFORNIA AV	4TH ST	5TH ST	5	1	24	399	53	1,118	42	10580	399	41	1	Selected Yr 1	50	FWM + Thick Overlay (> 2.0 - 3.0)	52.50	0	58,695	58,695	58,695	91
4975	1285	10			CLOVERFIELD BL	DELAWARE AV	VIRGINIA AV	2	1	60	607	202	4,249	61	11060	607	60	1	Selected Yr 1	26	Slurry Seal / Seal Coat + Strctrl Ptch	9.50	0	40,366	40,366	40,366	83

Figure 6 - Example of ESA City Data

2.5. Pavement Condition Survey

The goal of the pavement condition survey is to determine an accurate rating for each pavement section. The process of collecting and assessing data involves both automated and manual observations that originate from the data collected with the Road Surface Tester using Pavemetrics Laser Crack Measuring System (LCMS2) downward imaging lasers, an array of 4k cameras, and trained rating personnel.

Surface Distress Index (SDI)

ASTM D6433 categorizes surface distress observations based on the extent and severity of distresses encountered along the length of the roadway for asphalt and concrete pavements. Presented on a 0 to 100 scale, the Surface Distress Index (SDI) is an aggregation of the observed pavement defects. However, not all surface distresses are weighted equally. Certain load-associated distresses (LAD) (caused by traffic loading), such as rutting or alligator cracking on asphalt streets, or divided slabs on concrete streets, have a much higher impact on the SDI than non-load associated distresses (NLAD) such as raveling or longitudinal and transverse cracking. Even at low extents and moderate severity (less than 10% of the total area), LAD can drop the SDI considerably. The rating systems also incorporates algorithms to correct for multiple or overlapping distresses within a segment to account for multiple distresses that may arise from a single cause. The SDI inputs are shown in **Figure 7**.

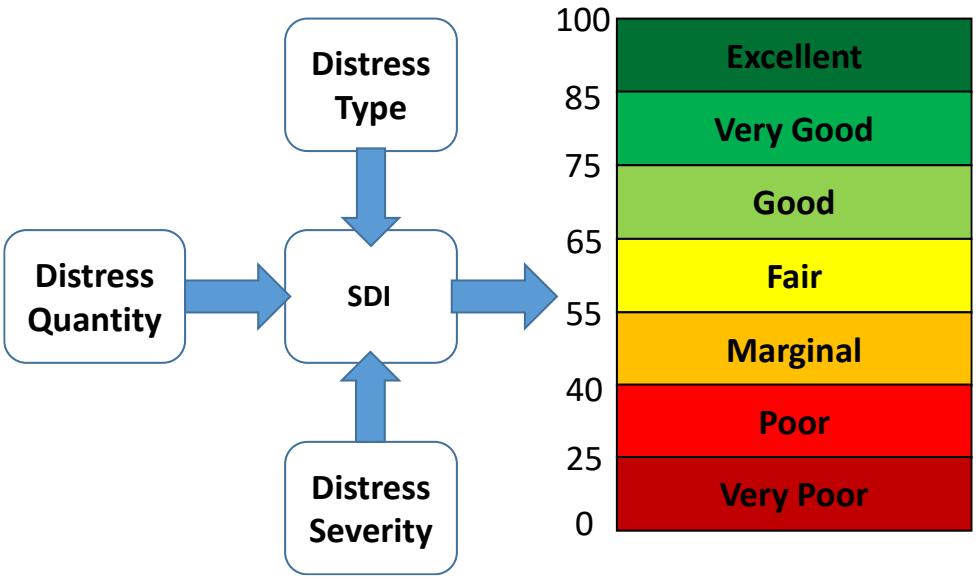


Figure 7 - SDI Inputs and Detailed Scale

ASTM D6433 covers nearly forty unique distress types that may or may not be present in an agency's road network. For that reason, IMS uses a modified approach that collects the most common distresses.

The descriptions on the following page outline some of the distresses collected for the City:

Table 2 - Distress Descriptions

Alligator Cracking – Quantified by the severity of the failure and number of square feet. As a load-associated distress, this distress has a significant impact on the condition score, even at low extents.



Wheel Path Rutting – Starting at a minimum depth of ¼ inch, wheel path ruts are quantified by their depth and the number of square feet encountered. Like alligator cracking, low densities of rutting can have a large impact on the final condition score.



Longitudinal & Transverse Cracks – Quantified by their length and width, these cracks can be the result of pavement shrinkage or construction issues.




Block Cracking – Quantified by their width and number of square feet, these cracks form interconnected longitudinal and transverse cracks that divide the pavement into approximately rectangular pieces.



Patching – A patch is an area of pavement replaced with new filler material to repair an existing distress. Quantified by the extent and quality of patches, even a good quality patch is considered a surface defect and affects the conditions.



Raveling – Loss of course aggregate materials on the pavement surface caused by insufficient asphalt binder, poor mixture quality, insufficient compaction, segregation, or stripping. It is measured by the severity and number of square feet affected.

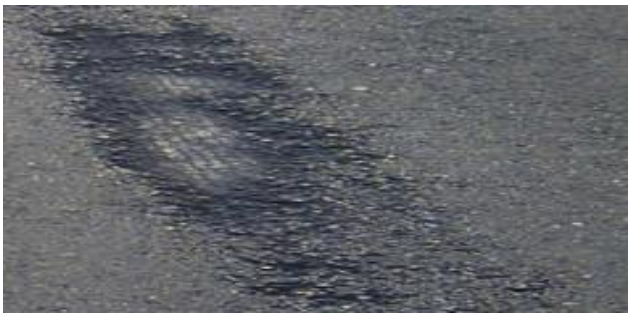

Bleeding – the presence of free asphalt on the roadway surface caused by excess asphalt in the pavement or insufficient voids in the matrix. The result is a shiny pavement surface with low skid resistance. This distress is measured by the amount and severity of the area.



Edge Cracking – Running parallel to the road and usually within 1 to 2 feet of the outer edge of the pavement, this distress is accelerated by traffic loading and weakened base conditions resulting from poor drainage.



Distortion – Includes various localized unevenness in the surface of the pavement including bumps and sags, depressions, swell, corrugation or shoving. Distortions are measured by the severity and the number of square feet affected.



Roughness Index (RI)

The Ride Index (RI) gives a measure of ride quality and is recorded following the industry-standard ASTM E1926 for determination of International Roughness Index (IRI). This value is generated from the longitudinal profile measured by the LCMS as it records the change in elevation over a distance. Once calculated it is expressed as a slope and reported in millimeters/meter. Common IRI levels for new, older, and damaged pavements are displayed in **Figure 8.**

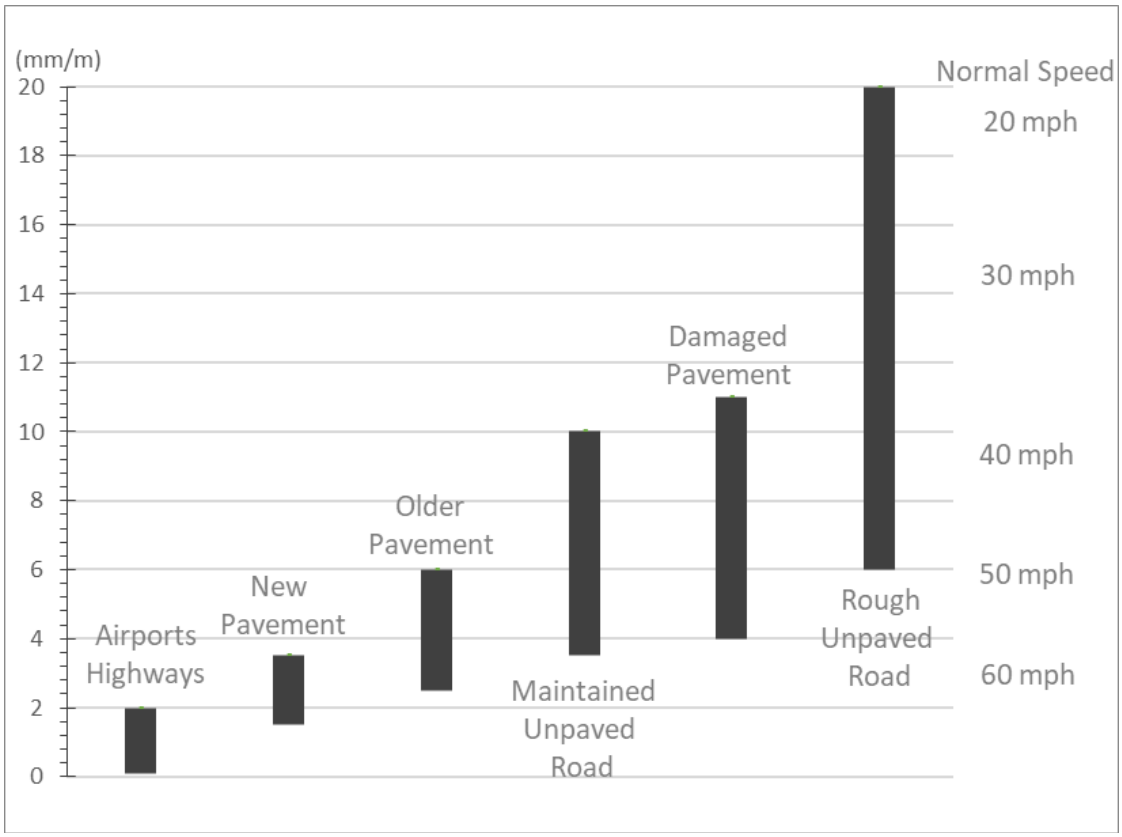


Figure 8 - IRI Scale Definitions

The IRI value is converted to a 0 to 100 score and reported as the Ride Index (RI) as follows:

$$\mathbf{RI} = (11 - 3.5 \times \ln(IRI)) \times 10$$

ln(IRI) is the natural logarithm of IRI.

In common terms, a newer street would generally have a Ride above 85, while one in need of an overlay would be in the range 40 to 70. Failed streets typically have roughness values below 40 but can achieve higher scores if the distress does not create a vertical displacement of the pavement.

Structural Index – The network of streets was not tested for structural adequacy, instead, the relationship between the PCI and amount of load-associated distresses was analyzed and each pavement section was assigned a Weak, Moderate, or Strong strength rating. The assigned structural index (30, 60, or 80 for weak, moderate, and strong respectively) was not used in determining the overall pavement condition score, but simply to classify the pavement strength and aid in selecting appropriate rehabilitation strategies.

Pavement Condition Index (PCI) – Following the field surveys, the condition data was imported to ESA for calculating the overall PCI. The PCI for each network was calculated using the following weighing factors:

PCI = 67% SDI + 33% RI

2.6. Field Survey Methodology

IMS deployed one of its LCMS2 road surface testing vehicles to perform continuous sampling data collection activities as part of the semi-automated pavement condition survey. The LCMS2 equipment provides three-dimensional high-speed, mm-level scanning and pattern recognition analysis from two downward lasers mounted at the rear of the vehicle. This provides a higher level of detail in determining crack length and width measurement over the sample area. The LCMS2 device also operates as a Class I profile device that collects longitudinal profile (in the form of IRI) and transverse profile (rutting) using the advanced 3D profile laser scanning technology. The vehicle is also equipped with a high accuracy GPS device and several high definition 4k cameras that collect forward, downward, and rearward images.



Figure 9 - LCMS2 data collection vehicle

While the LCMS2 automatically collects the majority of visible distresses, the RST platform integrates highly trained IMS technicians to input additional changes in observed distress severities and extents or identify specific roadway assets or attributes such as curb reveal or lip of gutter information by means of a touchscreen-based tablet computer connected to the data flow through time code, GPS, DMI distance and inventory control. The data is then processed in the office to generate extent quantities for each observed distress severity level which are then used to calculate a PCI.

2.7. Data Quality Assurance

The final step in determining PCI scores requires the field data to be subject to multiple stages of quality checks. The first phase is a rule-based check that flags roads based on expected outcomes from the automatic crack detection and processing parameters used to convert the LCMS2 data into severity and extent data. Part of this output is the identification of areas that are within the sample area but should be excluded from the assessment. This can include the edge of pavement or curb (purple and green highlight), manhole covers and inlets (red box), and pavement markings (yellow highlight) as seen in **Figure 10**. This is combined with information from our field raters about distresses that may not be present in a traditional manner or may be outside the guidelines set forth in ASTM D6433.

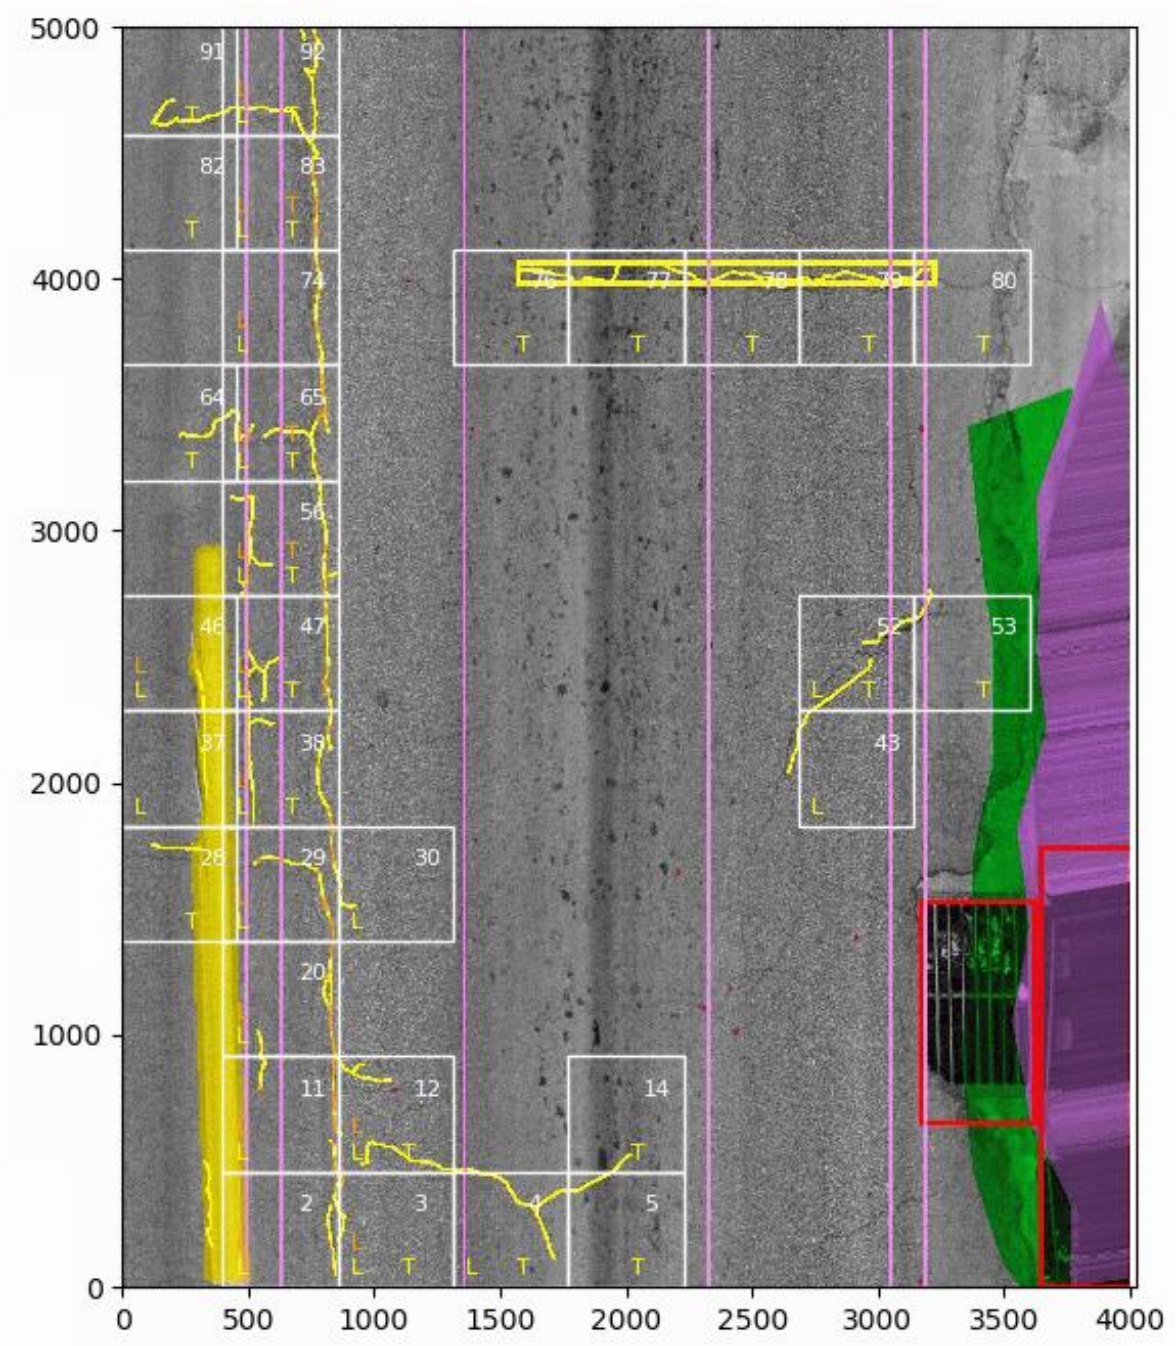


Figure 10 - Processed LCMS2 Image

A second review is then performed by a team of raters familiar with both the distress standards and the data in its digital format. Using the downward laser scans, field notes, and 4K images collected from the survey the Quality Control (QC) team is able to verify the accuracy of what the LCMS has collected and what was flagged in the field.



Figure 11 - QC Image

To further ensure accurate condition data, spot checks are conducted network wide by the QC team and the engineering staff. Once a sufficient level of confidence has been achieved, an initial condition sheet is submitted for review by City staff.

2.8. Summary

This section outlines the fundamental concepts of pavement management and the process by which the pavement management system is implemented. The operating parameters of ESA were reviewed, and the inputs provided by the LCMS-2 technology are explained to provide background PCI, Ride Quality, and Pavement Strength.

3.0 PAVEMENT CONDITION SURVEY RESULTS

3.1. Foreword

This section will review the results of the pavement condition survey performed in August 2021. First is a summary of conditions in the seven functional classes used in the City analysis. Next, this section will review photos of the network taken from the RST. Finally, a series of charts will summarize the findings of the condition survey and the overall PCI distribution of the City pavement network.

3.2. City Street Inventory and Condition Summary

The City of Yakima is currently responsible for approximately 356 centerline miles of pavement with an overall PCI of 64 and a backlog of 6%. These values are considered above average and point to an already effective management strategy. **Table 3** presents the City's inventory and pavement condition breakdown between different functional classes and surface types. Detailed information for each management section is available in **Appendix A**.


Table 3 - Network Inventory Summary by Functional Class

	Pavetype	Network	Principal Arterial	Minor Arterial	Ramp	Major Collector	Local	Truck Route	Other
Segment (Block) Count	All Streets	5402	42	369	2	347	3910	638	94
	Asphalt	5232	41	369	2	342	3760	624	94
	Concrete	147	1	0	0	5	136	5	0
	Composite	23	0	0	0	0	14	9	0
Network Length (mi):	All Streets	355.9	2.4	24.0	0.4	24.6	252.7	44.5	7.3
	Asphalt	344.5	2.4	24.0	0.4	24.4	242.5	43.6	7.3
	Concrete	9.5	0.0	0.0	0.0	0.2	9.1	0.2	0.0
	Composite	1.9	0.0	0.0	0.0	0.0	1.1	0.7	0.0
Average Width (ft):	All Streets	36.2	57.7	45.8	54.5	37.0	32.0	54.4	30.5
	Asphalt	36.3	57.8	45.8	54.5	37.1	32.0	54.4	30.5
	Concrete	31.3	28.3	0.0	0.0	25.8	31.2	40.7	0.0
	Composite	40.8	0.0	0.0	0.0	0.0	29.7	57.8	0.0
Network Area (yd2):	All Streets	7,563,382	80,361	646,459	12,665	534,310	4,738,072	1,421,554	129,961
	Asphalt	7,344,551	80,144	646,459	12,665	531,760	4,552,131	1,391,431	129,961
	Concrete	174,251	217	0	0	2,550	166,279	5,205	0
	Composite	44,580	0	0	0	0	19,662	24,918	0
Current Pavement Condition Index (CPCI) 5/2/22	All Streets	64	63	66	88	65	62	70	70
	Asphalt	64	63	66	88	65	62	70	70
	Concrete	54	85	0	0	39	52	96	0
	Composite	71	0	0	0	0	79	64	0
Pavement Condition Index (Surveyed PCI)	All Streets	65	64	67	88	66	63	71	71
	Asphalt	65	64	67	88	66	63	71	71
	Concrete	54	86	0	0	40	53	97	0
	Composite	72	0	0	0	0	79	65	0
Current Backlog (%)	All Streets	6	Percentage of Network with a PCI < 40						
Surface Distress Index (SDI)	All Streets	65	61	63	85	65	65	67	72
	Asphalt	65	61	63	85	65	65	67	72
	Concrete	56	91	0	0	39	55	99	0
	Composite	70	0	0	0	0	82	60	0
Roughness Index (RI)	All Streets	62	67	72	92	64	56	77	66
	Asphalt	62	67	72	92	65	56	77	66
	Concrete	48	74	0	0	39	47	89	0
	Composite	73	0	0	0	0	71	74	0

3.3. City Network Condition Imagery

The images presented below provide a sampling of the City streets that fall into the various condition categories with a discussion of potential rehabilitation strategies.

Very Poor (PCI = 0 to 25) – Complete Reconstruction

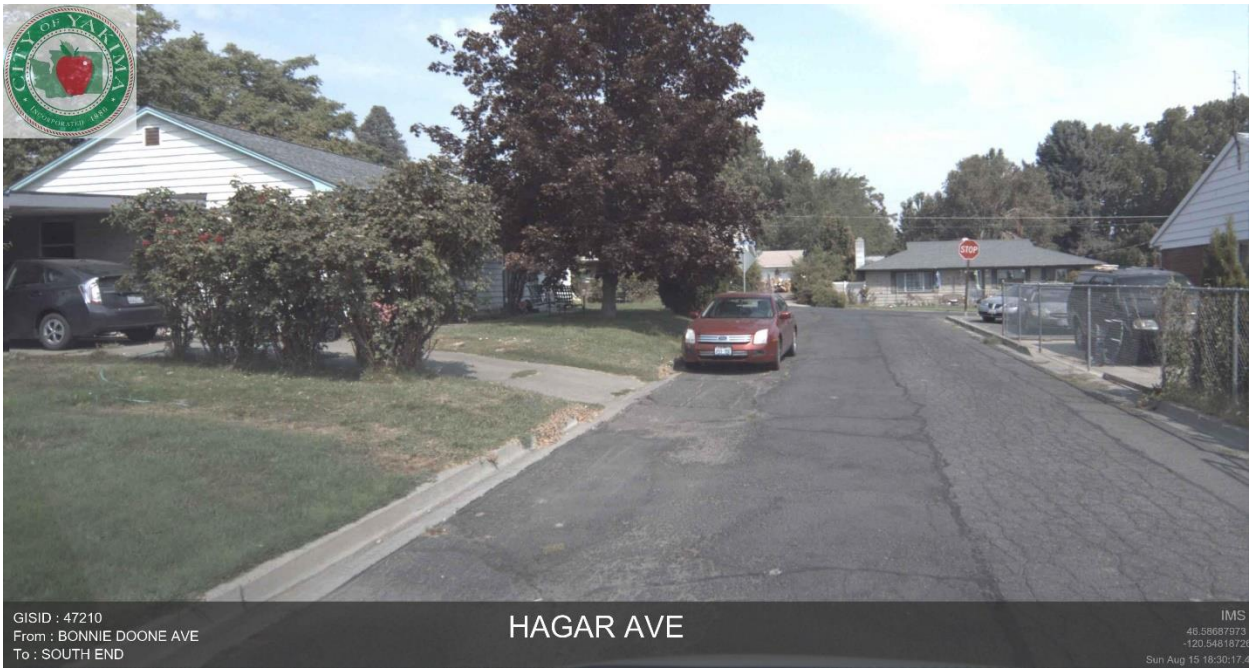

Hagar Avenue from Bonnie Doone Avenue to South End (GISID 47210, PCI = 16) – Rated as Very Poor, this street displays a large quantity of alligator cracking severe enough to suggest that the pavement structure is inadequate for current traffic loads. The renewal of roads in this condition through a mill and overlay is generally ineffective as the failures usually extend through the entirety of the pavement layer. Streets in this condition will require rehabilitation that can involve removal and replacement of the asphalt surface, base stabilization, or complete reconstruction based on design requirements.

Deferral of reconstruction of streets rated as Very Poor will not cause a substantial decrease in pavement quality as the streets have passed the opportunity for overlay-based strategies. Due to the high cost of reconstruction, Very Poor streets are often deferred in favor of completing more streets that can be rehabilitated at lower costs, resulting in a greater net benefit to the City. This strategy however must be sensitive to citizen complaints forcing the street to be selected earlier. In addition, this type of street can pose a safety hazard for motorists since severe potholes and distortions may develop. It is important to consistently monitor these streets and check for potholes or other structural deficiencies until the street is eventually rebuilt.

Poor (PCI = 25 to 40) – Last Opportunity for Surface Base Rehabilitation



21st Avenue from North End to Bonnie Doone Avenue (GISID 46360, PCI = 31) – Rated as Poor, this segment still has some remaining life before it becomes a critical reconstruction need. As evident in the imagery, a fair amount of the segment is severely cracked, and the severity of the cracking strongly contributes to the lower PCI score of this segment. If left untreated, within a short period of time, a partial to full reconstruction would be required.

On heavily trafficked roadways, Poor streets often require partial to full reconstruction – that is removal of the pavement surface and base down to the subgrade and rebuilding from there. On local roadways, they require removal of the pavement surface through grinding or excavation, base repairs, restoration of the curb line and drainage, and then placement of a new surface.

Marginal (PCI = 40 to 50) – Thicker Overlays / Moderate Panel Replacement



Bonnie Doone Avenue from 19th Avenue to 20th Avenue (GISID 46410, PCI = 46) – Marginal streets have distresses that tend to be localized and moderate in nature – that is they do not extend the full length of the segment. On this segment the primary cause of deterioration is faulting and divided slab that is clearly seen in panels on the right-hand side of the street.

Marginal streets that display high amounts of load associated distresses (LAD) are selected as a high priority for rehabilitation as they generally provide the greatest cost/benefit to the City. If left untreated, Marginal streets with high amounts of LAD will deteriorate to become partial reconstruction candidates. Marginal streets that are failing due to materials issues or non-load associated failures may become suitable candidates for thick overlays if deferred, without a significant cost increase.

Fair (PCI = 50 to 60) – Thin to Moderate Overlays / Light Panel Replacement



34th Avenue from Vincenta Way to West Prasch Avenue (GISID 50030, PCI = 52) – Fair streets have similar characteristics to Marginal streets in that the distresses present tend to be localized and moderate in severity. However, the distresses will predominately be non-load related (primarily longitudinal cracking). On this street, there is also some noteworthy alligator cracking along the wheel paths of the pavement, but it does not persist throughout the segment.

Like Marginal streets, Fair streets can provide a high cost/benefit to an agency if addressed with an adequate rehabilitation technique. Stretching the application for surface treatments into this range can pose a cheap alterative to overlays, but does not provide the appropriate renewal to the structural capacity of the pavement and may allow the load related deterioration to continue unabated.

Good (PCI = 60 to 70) – Surface Treatments to Thin Overlays



Graystone Court from North 78th Avenue to East End (GISID 12230, PCI = 63) – Rated as Good with the primary cause of deterioration the transverse and longitudinal cracking. The pavement surface could be restored further with spot patching and a slurry seal to fully waterproof the pavement.

Preventive measures on streets considered "Good" can have positive impact of the City's funding needs. While the expected life of a slurry seal is not as long as that of an overlay, its ability to slow deterioration and relative low cost can free up funding for streets in worse condition.

Very Good (PCI = 70 to 85) – Surface Treatments and Localized Rehabilitation



Occidental Road from South 86th Avenue to South 88th Avenue (GISID 63510, PCI = 73) – Rated as Very Good, this road displays minor amounts of longitudinal cracking. This street is an example of a candidate for preventative maintenance such as crack seal or slurry seal to extend the life of a roadway.

Routine maintenance prevents water intrusion by sealing and slowing crack growth. By keeping water out of the base layers, the pavement life is extended without the need for heavier rehabilitations.

Excellent (PCI = 85 to 100)



Surrey Lane from Coach Court to Carriage Hill Drive (GISID 8050, PCI = 97) – Rated as Excellent, displaying little to no surface distresses. The ride is smooth and the surface and the base is strong. Excellent roads should be periodically assessed for crack development that would trigger routine maintenance activities.

3.4. City Network Condition Distribution

Figure 12 plots the distribution of pavement condition for the roadway network in Yakima using predefined descriptive terms.

- Nine percent (9%) of the network can be considered in "Excellent" condition and should be closely monitored to ensure timely application of early localized preventive measures.
- Twenty-seven percent (27%) of the network falls into the PCI range considered "Very Good". These are roads that benefit most from preventative maintenance techniques such as spot patching and slurry seals.
- Twenty-five percent (25%) of the streets are rated as "Good" and may still be candidates for slurry seals or thin overlays.
- Thirty-three percent (33%) of network can be considered "Fair" to "Marginal" condition and representing candidates for progressively thicker overlay-based rehabilitation. If left untreated, they will decline rapidly into reconstruction candidates.
- The remaining six percent (6%) of the network is rated as "Poor" or "Very Poor", meaning these roadways have deteriorated to the point where surface rehabilitation can no longer restore the pavement to a point of structural adequacy. Rehabilitation of the entire pavement structure is required for these segments.

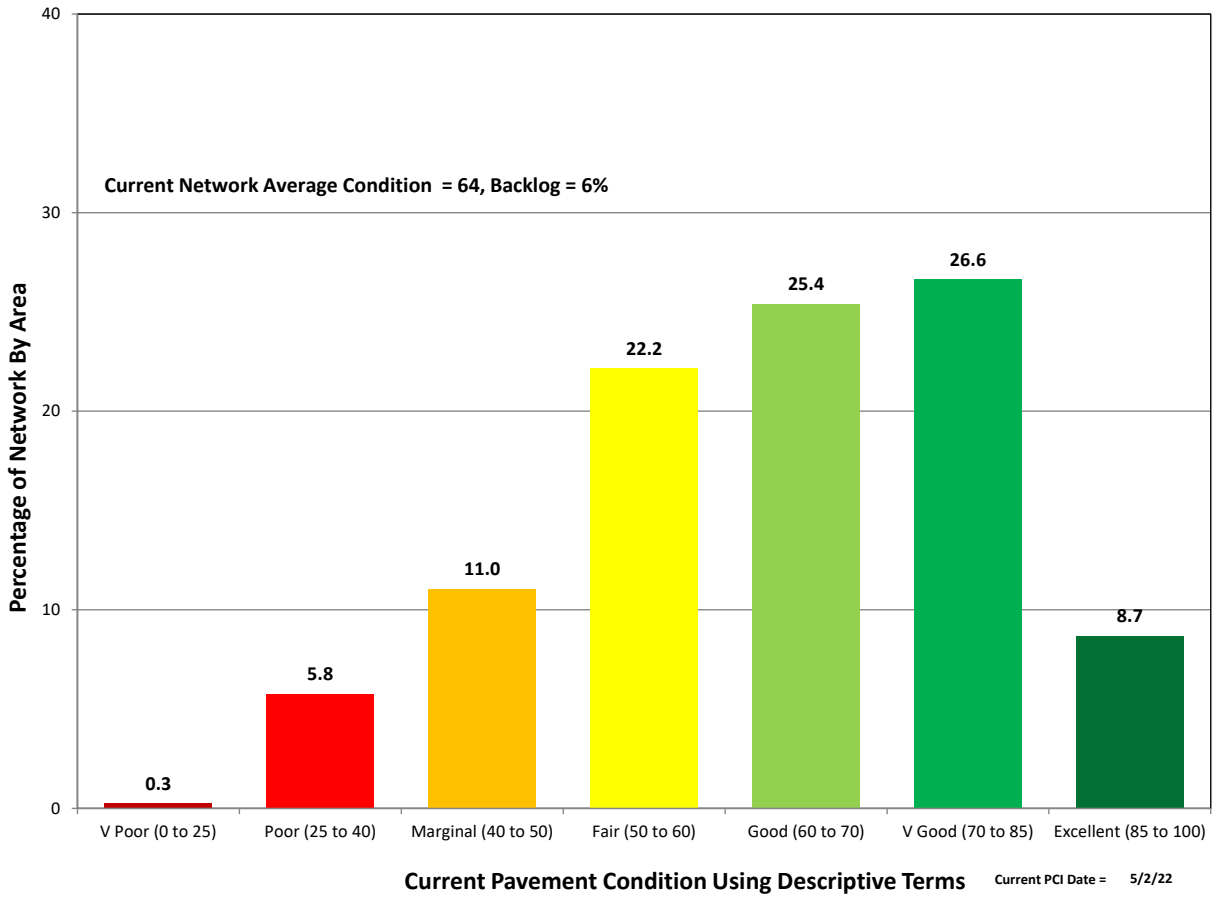


Figure 12 - Roadway Network Present Status Using Descriptive Terms

3.5. Condition By Pavement type and Functional Classification

When assessing the overall condition of the network there are additional subsets of data that can give a deeper insight into where an agency may want to focus resources. **Figure 13** below shows a side-by-side comparison of condition distribution if the asphalt and concrete streets were separated.

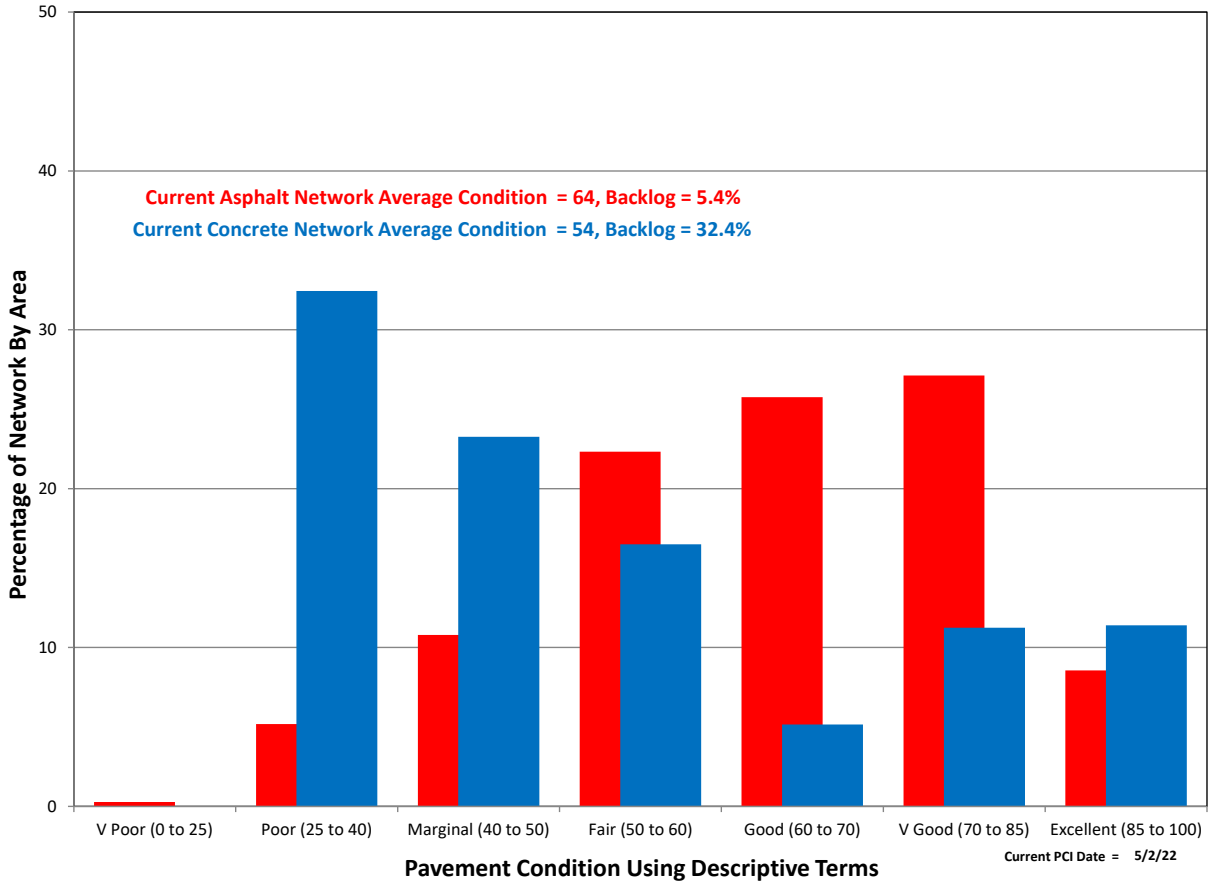


Figure 13 - Condition Rating by Surface Type

Figure 14 highlights the pavement condition distribution for each functional class. Keep in mind that arterial roadways, the streets that have the majority of traffic use and link various parts of the city together, should receive additional consideration when selecting rehabilitation candidates.

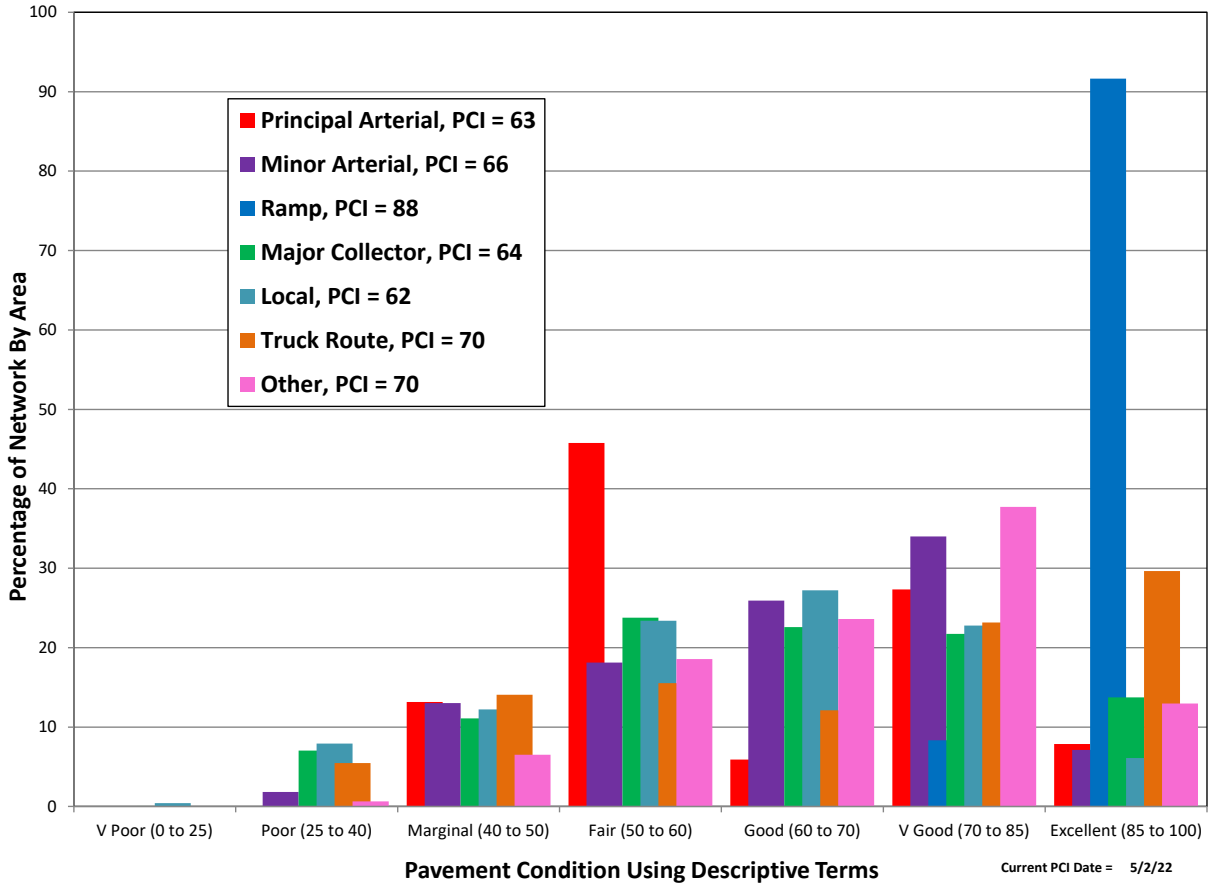


Figure 14 - Condition Rating by Functional Classification

3.6. Structural and Load Associated Distress Analysis

Structural testing was not performed for the City. Instead, analysis of the cause of pavement failure for these street segments was completed by examining the types of distresses that have caused the PCI score to drop.

As mentioned in section 2, pavement distresses may be categorized into two classifications – load associated distresses (LAD) and non-load associated distresses (NLAD). Load associated distresses are those that are directly related to traffic loading and structural capacity such as rutting and alligator cracking. Non-load associated distresses are those that result from materials or environmental issues including shrinkage (transverse) cracking, bleeding and raveling. Generally, load associated distresses affect the overall condition score more than non-load associated distresses. For asphalt streets, roadways were classified as Weak, Moderate, or Strong based on their PCI and the sum of load associated deducts.

Weak pavements are those with a high ratio of load associated distresses compared to their PCI score and generally require increased pavement thickness to achieve long-term pavement life. Strong pavements are those that have a low LADD to PCI ratio and have suitable structural capacity to accept lightweight surface treatments with minimal preparation. Moderate pavements are those that require localized rehabilitation and/or increased thickness to achieve full pavement life. These are pavements that are starting to display structural and base failures such as rutting or alligator cracking.

The purpose of the structural analysis is twofold:

- The structural index provides input into which performance curve each segment is to use.
- Structural analysis assists in rehabilitation selection by constraining inadequate pavement sections from receiving too light of rehabilitation and conversely, identifying segments suitable for lighter weight treatment.

The primary area of concern is the street segments that have a high pavement condition score yet exhibit low structural characteristics (weak to moderate pavement strengths). When an overlay is to be applied, project-level testing and design should be completed to ensure their structural integrity is restored.

3.7. Summary

Section 3 reviews the results of the condition survey in the City. The section describes each of the seven functional classifications in the City and outlines their respective conditions on the GFP scale. The GFP scale is explained further through a series of pavement photographs that were taken during the 2021 survey. The section concludes with a discussion on the overall pavement condition distribution in the City and some useful charts that help put the survey results into perspective. **The network average PCI in City is a 64 with a backlog of 6%.**

4.0 REHABILITATION PLAN AND BUDGET DEVELOPMENT

4.1. Foreword

This section discusses the results of the pavement management analysis that was performed using the ESA pavement management system. First is an overview of the assumptions that were used when implementing the system. Some of these include the development of accurate unit rates, and the selection methodology for rehabilitation candidates. Next, in 4.3, the results of each of the various budget runs is detailed, along with their anticipated conditions. This is highlighted further through a series of charts that are used to demonstrate the positives and negatives of various funding models. Finally, the City's selected budget is presented through a chart outlining the 5-year projected condition.

4.2. Key Analysis Set Points and Assumptions

Pavement management analysis requires user inputs to complete its condition forecasting and prioritization. A series of operating parameters were developed to create an efficient program that is tailored to the City's needs.

Selecting Segments for Rehabilitation

The selection of rehabilitation candidates through a worst first approach or subjective committee input is neither efficient nor cost effective. A series of criteria must be established and their importance in the selection process determined. ESA has defined commonly used criteria within the program that allows different weighting factors to be applied depending on an agency's goals.

- **PCI** – As mentioned earlier in this section the results of the pavement condition survey are used to generate an Overall Condition Index that ranges from 0-100 where 0 is considered the worst and 100 the best. This factor can be given a higher weight to give greater priority to poor condition streets.
- **Cost of Deferral** – As time passes a pavement will deteriorate and require more costly repairs as it ages. ESA can be configured to prioritize streets nearing the point where this cost increase occurs.
- **Pavement Strength** – Through the use of deflection testing or the prevalence of load associated distresses the relative strength of a pavement can be assumed. A prioritization factor can be applied that gives preference to streets that may deteriorate faster in order to apply more cost-effective rehabilitation early in the life cycle.
- **Pavement Type** – Depending on costs, design life, and agency goals, a weighting factor can be applied based on the materials used to construct the pavement
- **Functional Class** – Generally higher volume streets are given the greatest priority within a program since they serve the most vehicles.
- **Area** –Project selection can consider the size of a project when determining rehabilitation priority. An agency can decide to select large groups of streets over small ones if that approach suits the goals set forth at the beginning of the project.

For the City, weighting factors for these categories were set to maximize the savings from the concept of cost of deferral and address lower PCI 'Weak' streets in order to minimize backlog growth.

Rehabilitation Strategies and Unit Rates

The rehabilitation strategies and unit rates used in the budget analysis are the driving factors in determining funding requirements for the City. A detailed listing of how each rehabilitation activity is applied and its associated cost can be found on the following page in **Table 4**. Some important parameters include:

- **Pavement Type –** The City of Yakima has a majority asphalt network with a small fraction of concrete. The lists of appropriate rehabilitation activities for these two pavement types are unique and vary in cost.
- **Rehab Activity** – The assigned identifier and name to each rehabilitation strategy. Various degrees of slurry sealing are outlined to highlight the increasing cost associated with additional patching requirements for lower PCI streets.
- **Min, Max, and Critical PCI** – These ranges determine the PCI range to which a particular rehabilitation activity can be applied where the Min and Max values define the upper and lower limit, and the Critical PCI is the point at which the rehabilitation becomes a higher priority to take advantage of the cost of deferral factor. Overlap in the PCI range allows for additional rehabilitation differentiation based on pavement strength.
- **Unit Rates** – The rehab costs are presented on a per square yard basis for each pavement type, functional class, and rehabilitation activity combination. A base unit rate is established for the lowest assumed cost for a work type and adjusted for each functional class depending on the additional work that may be required for traffic control, intersection improvements, landscaping, utility adjustments, and ROW infrastructure. IMS worked closely with the City to determine rates that accurately represent the cost of doing work.

Table 4 – Rehabilitation Rates

City of Yakima, WA
Rehabilitation Strategies and Unit Rates

Pavetype	Rehab Activity	Rehab Group 1 Min PCI	Critical PCI (Need Year)	Max PCI	Base Unit Rate ($/yd2)	Principal Arterial Unit Rate ($/yd2)	Minor Arterial Unit Rate ($/yd2)	Ramp Unit Rate ($/yd2)	Major Collector Unit Rate ($/yd2)	Minor Collector Unit Rate ($/yd2)	Local Unit Rate ($/yd2)	Truck Route Unit Rate ($/yd2)	Other Unit Rate ($/yd2)
All	Routine Maintenance	85	100	100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Asphalt	Slurry Seal / Seal Coat	80	82	85	**2.00**	2.20	2.15	2.10	2.05	2.00	2.00	2.20	2.00
Asphalt	MicroSurface / Chip Seal	70	73	80	**3.10**	3.40	3.30	3.30	3.20	3.10	3.10	3.40	3.10
Asphalt	Edge Mill + Thin Overlay (1.5 - 2.0)	60	63	70	**45.00**	49.50	48.50	47.50	46.00	45.00	45.00	49.50	45.00
Asphalt	EM/FWM + Moderate Overlay (2.0 - 3.0)	50	54	60	**45.00**	52.00	50.00	48.50	46.50	45.00	45.00	52.00	45.00
Asphalt	FWM + Thick Overlay (> 2.0 - 3.0)	40	44	50	**50.00**	60.50	58.00	55.00	52.50	50.00	50.00	60.50	50.00
Asphalt	Surf Recon + Base Rehab / FWM + Strctrl Ptch + Olay	25	30	40	**62.00**	75.00	71.50	68.50	65.00	62.00	62.00	75.00	62.00
Composite	Surf Recon + PCC to Base/FWM + Strctrl Ptch + Olay	25	30	40	**66.00**	80.00	76.50	73.00	69.50	66.00	66.00	80.00	66.00
Asphalt	ACP Full Depth Reconstruction	0	15	25	**150.00**	165.00	161.00	158.00	154.00	150.00	150.00	165.00	150.00
Composite	Full Depth Recon + PCC to Base	0	15	25	**158.00**	174.00	170.00	166.00	162.00	158.00	158.00	174.00	158.00
Concrete	PCC Jnt Rehab & Crk Seal	80	82	100	**5.00**	5.50	5.50	5.25	5.25	5.00	5.00	5.50	5.00
Concrete	PCC Localized Rehab	70	73	80	**11.00**	12.75	12.25	11.75	11.50	11.00	11.00	12.75	11.00
Concrete	PCC Slight Pnl Rplcmnt (<10%)	60	63	70	**22.50**	27.25	26.00	24.75	23.75	22.50	22.50	27.25	22.50
Concrete	PCC Moderate Pnl Rplcmnt (< 20%)	50	54	60	**34.50**	44.00	41.50	39.00	36.50	34.50	34.50	44.00	34.50
Concrete	PCC Extensive Pnl Rplcmnt (<33%)	40	44	50	**47.50**	63.00	59.00	55.00	51.00	47.50	47.50	63.00	47.50
Concrete	PCC Partial Reconstruction	25	30	40	**65.50**	83.00	78.50	74.00	69.50	65.50	65.50	83.00	65.50
Concrete	PCC Full Depth Reconstruction	0	15	25	**99.50**	132.50	123.50	115.00	107.00	99.50	99.50	132.50	99.50

4.3. Network Budget Analysis Models

By combining the condition assessment, deterioration model, prioritization factors, and rehabilitation assignments, the ESA program can determine the outcomes of various funding levels or suggest the funds required to attain a goal. IMS ran a series of budgets to model network trends and estimate the funding levels needed to reach certain condition and distribution targets. The results of this analysis are outlined in this section.

Budget Targets

The following scenarios were generated to forecast the outcomes of the current estimated City budget over the next five years and determine what level of funding may be appropriate going forward. The values for backlog and PCI have been rounded to the nearest whole number in order for the figures to be more legible. Varying budget figures will have slightly different outcomes that are visible in the charts but may not be completely represented in the legend text.

- **Yakima Budget** (Green Line) – This represents the City's current average annual budget of **$2.7M/**Yr. dedicated to pavement preservation and rehabilitation. This level of funding will result in a network average PCI score of **60** and a backlog of **13%**.
- **Steady State PCI** – This is simply the funds required to maintain the current network average PCI at a **64**. The annual budget required to do so is approximately **$8.2M**/Yr.
- **Maintain Current Backlog** – This budget estimates the required funding level to maintain the backlog at **5%**. It is very near the budget level of the steady state PCI at **$27.2M**/Yr. and results in a PCI increase to **76**.
- **Backlog Control** – A backlog control budget was developed in order to cap backlog growth at a maximum level of 8%. The required level of funding to do so is estimated at **$21.8M**/Yr. and increases the PCI to **72**.
- **PCI Control** – A PCI control budget was developed in order to maintain a minimum PCI of **63**. This results in a budget value of **$7M**/Yr. and a backlog increase to **12%**.

The results of the analysis are summarized in **Figure 15**. The X-axis highlights the annual budget, while the Y-axis plots the 5 Year Post Rehab Network Average PCI value. The diagonal blue line is the network trend model developed to show estimated PCI along with a funding range up to $25M/Yr.

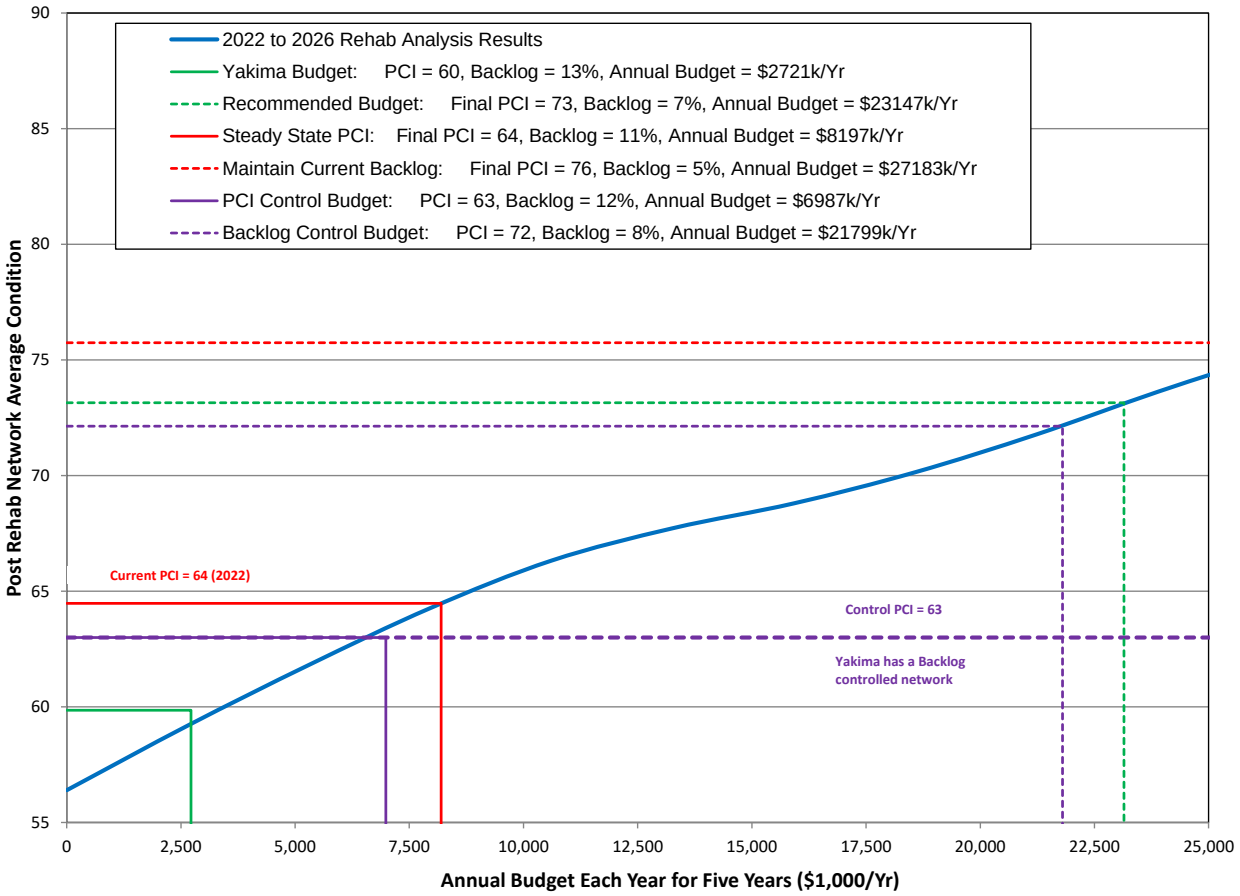


Figure 15 – 5-Year Post Rehab Network PCI Analysis Results

Figure 16 presents the resultant network backlog against the annual budget. Similar to **Figure 15**, but instead of plotting the average PCI score, the blue diagonal line represents the total backlog after 5 years. The City currently maintains a backlog of 6%. While some growth is acceptable, every effort should be made to keep that value as low as possible. As the backlog grows the funding required to return to the current level will increase dramatically.

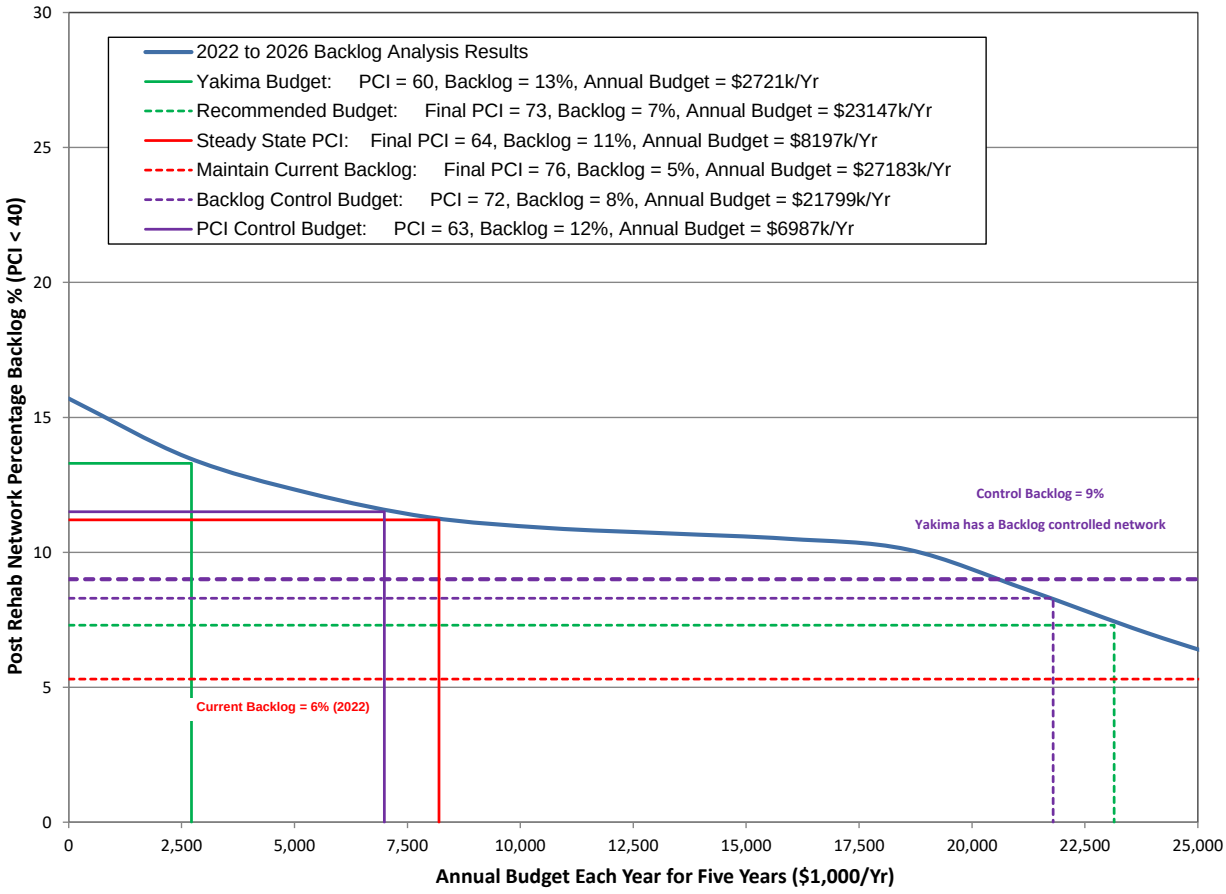


Figure 16 – 5-Year Post Rehab Network Backlog Results

Figure 17 presents the analysis results on an annual basis. This shows that if the budget falls below $8.2M/Yr. (Steady State Budget), over time the overall condition of the roads will deteriorate as the backlog continues to grow.

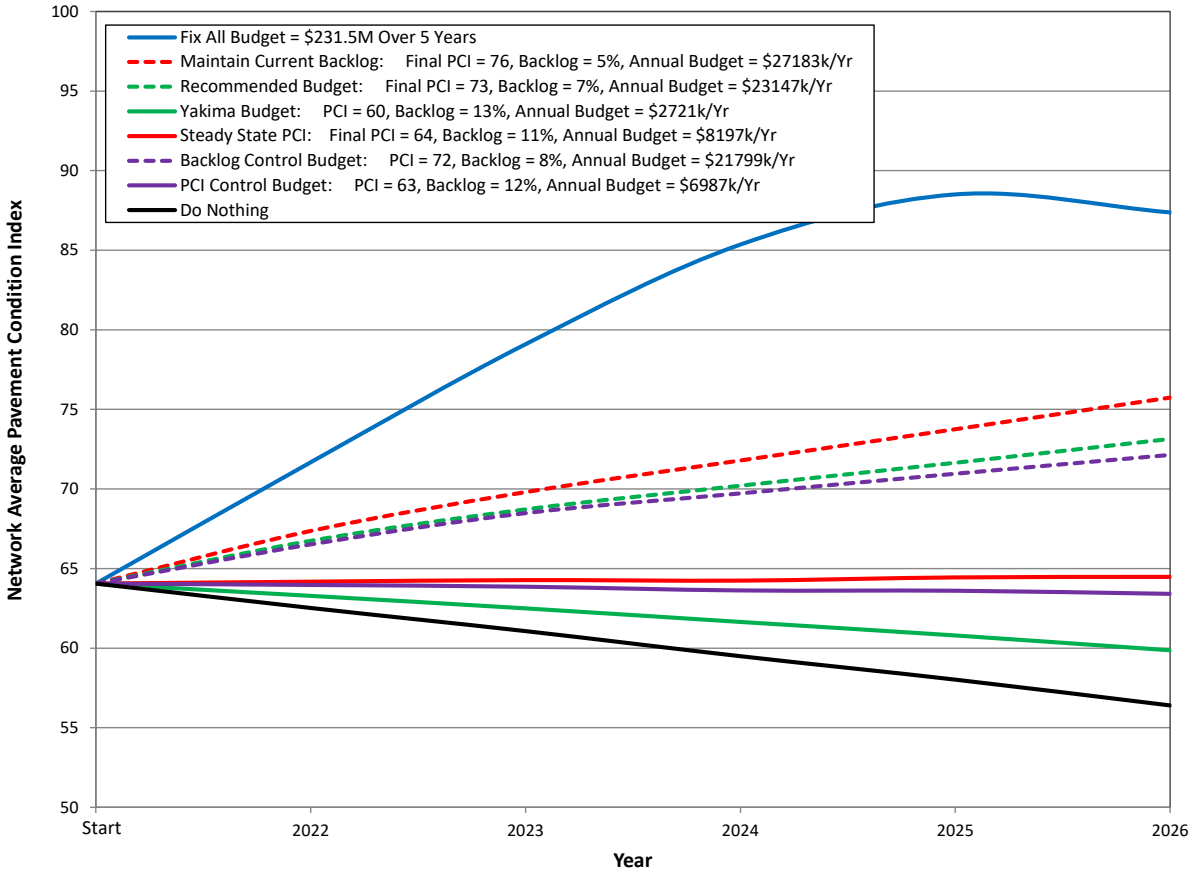


Figure 17 – 5-Year Annual PCI

4.4. Post Rehabilitation Condition

The following figure (**Figure 18**) compares the current network condition distribution (red) against the projected 5-year post rehabilitation distribution at the current estimated $2.7M/Yr. (blue) funding level. Based on current models the average PCI is expected to drop to 60 by the end of the five-year analysis period and the backlog to increase to approximately 13%.

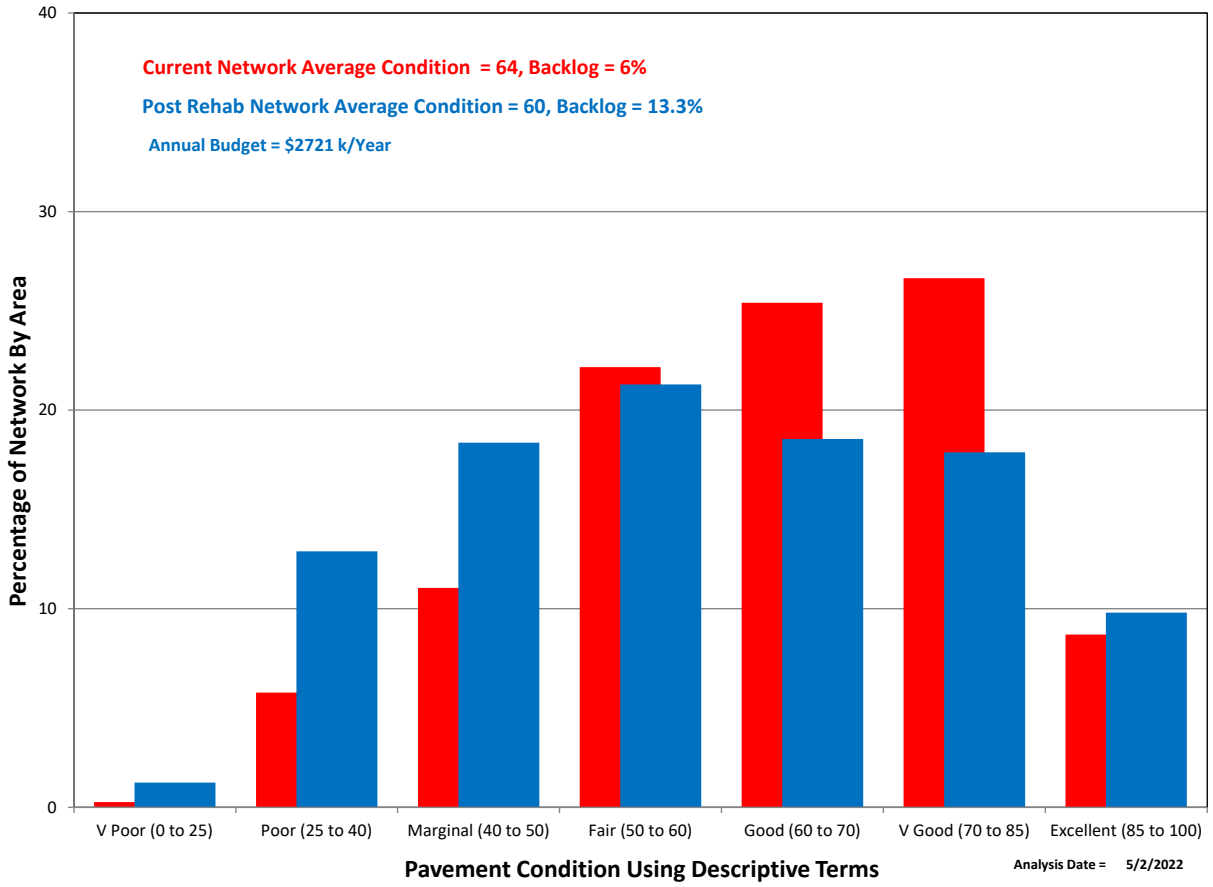


Figure 18 – 5-Year Post Rehabilitation Condition Distribution

4.5. Summary

This section reviews the results of the 2022 pavement analysis models that were run in the ESA program. The current City budget of $2.7M/Yr will result in a 5-year post rehab PCI of 60 and a backlog of approximately 13%. These models demonstrate that a budget that falls below $8.2M (steady state model) will result in an overall PCI decrease over the course of 5-years.

5.0 PROJECT RECOMMENDATIONS AND COMMENTS

5.1. Project Summary and Recommendations

A pavement condition survey was performed in August 2021 on the full City pavement network. The results of the condition survey were aggregated into the ESA pavement management system. This system was used to organize a georeferenced pavement inventory, develop an accurate model of the network's condition and anticipated deterioration, and provide funding recommendations for various level-of-service goals.

The following broad recommendations are presented to City as an output from the pavement analysis and must be read in conjunction with the attached reports.

- The City should make efforts to keep the ESA spreadsheet up to date.
  - By maintain and updating the rehabilitation unit rates, work history of the segments, and accuracy of the inventory the City will be able to reliably forecast funding needs for future years. This allows the City to be proactive in maintain the condition of the pavement network at an acceptable level.
- The City should periodically resurvey the pavement network.
  - Pavement performance over time involves many variables such as, traffic volumes, environmental factors, maintenance timing, and design standards. As these variables change, the rate at which a pavement deteriorates will change with them. The periodic resurvey of pavement conditions allows the City to track these changes and update models accordingly to ensure that appropriate rehabilitation measures are being planned.
- The City should investigate new an additional rehabilitation activities.
  - As technology progresses improvements in the way pavement is rehabilitated are always being made. When possible, the City should refresh the rehabilitation activities planned into ESA to ensure these advances are used to the City's advantage.
- The City should strive to maintain or better its current condition if possible.
  - Generally, it is more cost effective to maintain a condition than it is to regain ground lost to deterioration. The City currently maintains an overall network PCI of 64 with a backlog value of 6%. To maintain the PCI value, the City will need to allocate approximately $8.2M/Yr. to pavement preservation and rehabilitation.

5.2. Closing

The IMS Team greatly appreciates the opportunity to work with the City on this pavement management update. Over the course of this project, it has become clear that the City staff demonstrates a strong commitment to providing the highest level of service that they can to their community. IMS stands ready to assist the City with training and technical support as necessary, and we welcome the opportunity to work with the City on future pavement management projects.

Appendix A

Street Inventory and Condition Summary

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
9610	10TH AVE	WILLOW ST	GARRETT ST	Local	Asphalt	33	337	62	1297	73	56	80	Strng	Good	7	20	**66.6**
8600	10TH AVE	GARRETT ST	FRUITVALE BLVD	Local	Asphalt	33	327	60	1,259	68	63	80	Strng	Good	5	27	**65**
28910	10TH AVE	W YAKIMA AVE	W A ST	Local	Asphalt	29	491	79	1,661	57	50	80	Strng	Fair	16	27	**54**
26730	10TH AVE	W A ST	SUMMITVIEW AVE	Local	Asphalt	35	85	17	347	74	52	80	Strng	Good	4	23	**66**
31290	10TH AVE	W YAKIMA AVE	W CHESTNUT AVE	Local	Asphalt	36	489	98	2054	78	58	60	Mod	V Good	5	17	**70.4**
35520	10TH AVE	W WALNUT ST	W SPRUCE ST	Local	Asphalt	35	479	93	1,956	46	52	80	Strng	Marginal	26	29	**47**
37360	10TH AVE	W SPRUCE ST	W PINE ST	Local	Asphalt	34	479	90	1,900	72	54	60	Mod	Good	12	16	**65**
39050	10TH AVE	W PINE ST	TIETON DR	Local	Asphalt	35	323	63	1,319	34	35	80	Strng	Poor	34	25	**33**
40390	10TH AVE	TIETON DR	HAYNES ST	Local	Asphalt	24	348	46	974	83	64	60	Mod	V Good	7	11	**75.7**
41940	10TH AVE	HAYNES ST	MACLAREN ST	Local	Asphalt	23	327	42	877	85	66	60	Mod	V Good	1	14	**78.1**
42070	10TH AVE	MACLAREN ST	MACLAREN ST	Local	Asphalt	24	62	8	174	64	35	60	Mod	Fair	21	15	**53**
43260	10TH AVE	MACLAREN ST	SAINT HELENS ST	Local	Asphalt	24	269	36	753	80	61	60	Mod	V Good	6	14	**73.1**
44570	10TH AVE	SAINT HELENS ST	W ARLINGTON ST	Local	Asphalt	23	310	40	832	88	69	60	Mod	V Good	5	7	**80.8**
45520	10TH AVE	W ARLINGTON ST	BAKER ST	Local	Asphalt	23	342	44	918	82	63	60	Mod	V Good	1	17	**74.6**
46840	10TH AVE	BAKER ST	DS@334S BAKER ST	Local	Asphalt	25	334	46	974	83	64	60	Mod	V Good	5	12	**76.1**
47430	10TH AVE	DS@334S BAKER ST	STEWART ST	Local	Asphalt	24	327	44	916	90	70	60	Mod	V Good	0	10	**82.8**
48960	10TH AVE	STEWART ST	W NOB HILL BLVD	Local	Asphalt	25	333	46	971	83	65	60	Mod	V Good	1	16	**76.3**
50340	10TH AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	32	651	116	2430	77	60	60	Mod	V Good	6	17	**70.4**
52550	10TH AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	32	671	119	2505	81	72	60	Mod	V Good	4	15	**77.1**
54550	10TH AVE	W VIOLA AVE	W LOGAN AVE	Local	Asphalt	32	659	117	2460	72	59	80	Strng	Good	6	22	**67.1**
55940	10TH AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	33	657	120	2529	75	56	80	Strng	Good	4	22	**67.8**
57120	10TH AVE	W MEAD AVE	WOODLAND AVE	Local	Asphalt	27	445	67	1402	81	62	60	Mod	V Good	10	10	**73.5**
57720	10TH AVE	WOODLAND AVE	DS@232S WOODLAND AVE	Local	Asphalt	30	232	39	812	100	90	60	Mod	Excellent	0	0	**95.6**
58730	10TH AVE	DS@232S WOODLAND AVE	W PIERCE ST	Local	Asphalt	34	611	115	2424	92	76	60	Mod	Excellent	8	0	**85.9**
58940	10TH AVE	W PIERCE ST	W PIERCE ST	Local	Asphalt	34	45	9	179	76	56	80	Strng	Good	0	24	**68.5**
59910	10TH AVE	W PIERCE ST	SPOKANE ST	Local	Asphalt	36	623	125	2,617	94	83	60	Mod	Excellent	6	0	**89**
60330	10TH AVE	SPOKANE ST	FREMONT ST	Local	Asphalt	43	414	99	2077	82	82	60	Mod	V Good	18	0	**81.2**
60970	10TH AVE	FREMONT ST	W WASHINGTON AVE	Local	Asphalt	36	261	52	1,096	93	79	60	Mod	Excellent	7	0	**87**
69780	10TH ST	E LINCOLN AVE	NORTH END	Local	Asphalt	33	279	51	1,074	33	47	80	Strng	Poor	33	34	**36**
69770	10TH ST	E MARTIN LUTHER KING JR BLVD	E LINCOLN AVE	Truck Route	Asphalt	23	387	49	1,038	87	68	60	Mod	V Good	4	9	**80**
14830	10TH ST	STAFF SGT PENDLETON WAY	DS@176N STAFF SGT PENDLETON WAY	Local	Asphalt	30	176	29	616	25	26	60	Mod	Poor	51	24	**24**
13830	10TH ST	DS@176N STAFF SGT PENDLETON WAY	E MARTIN LUTHER KING JR BLVD	Local	Asphalt	31	293	50	1,060	67	56	60	Mod	Good	15	17	**63**
15080	10TH ST	STAFF SGT PENDLETON WAY	STAFF SGT PENDLETON WAY	Local	Asphalt	30	64	11	224	34	24	80	Strng	Poor	37	29	**30**
17930	10TH ST	TERRACE HGTS WY	PITCHER ST	Local	Asphalt	32	142	25	530	67	42	80	Strng	Fair	14	19	**58**
19020	10TH ST	PITCHER ST	DS@166S PITCHER ST	Local	Asphalt	30	166	28	581	41	32	80	Strng	Poor	31	28	**37**
19650	10TH ST	DS@166S PITCHER ST	E CHESTNUT AVE	Local	Asphalt	27	180	27	567	67	41	80	Strng	Fair	8	25	**57.4**
21380	10TH ST	E CHESTNUT AVE	E WALNUT ST	Local	Asphalt	27	505	76	1591	56	42	80	Strng	Fair	18	26	**50.3**
23350	10TH ST	E WALNUT ST	E SPRUCE ST	Local	Asphalt	29	463	75	1566	51	38	80	Strng	Marginal	23	26	**45.6**
24590	10TH ST	E SPRUCE ST	DS@327S E SPRUCE ST	Local	Asphalt	30	327	55	1,145	86	68	60	Mod	V Good	1	12	**79**
27600	10TH ST	DS@327S E SPRUCE ST	E MAPLE ST	Local	Asphalt	32	528	94	1971	85	67	60	Mod	V Good	4	11	**78.3**
29960	10TH ST	E MAPLE ST	E BEECH ST	Local	Asphalt	40	485	108	2263	81	62	60	Mod	V Good	12	7	**74.1**
31440	10TH ST	E BEECH ST	S FAIR AVE	Local	Asphalt	39	387	84	1,761	72	50	80	Strng	Good	8	20	**64**
9640	11TH AVE	WILLOW ST	GARRETT ST	Local	Asphalt	25	330	46	963	80	64	60	Mod	V Good	5	15	**74**
8660	11TH AVE	GARRETT ST	DS@148N GARRETT ST	Local	Asphalt	26	148	21	449	82	69	60	Mod	V Good	0	18	**76.8**
8270	11TH AVE	DS@148N GARRETT ST	FRUITVALE BLVD	Local	Asphalt	27	188	28	592	66	40	80	Strng	Fair	8	26	**57**
26530	11TH AVE	SUMMITVIEW AVE	DS@176N SUMMITVIEW AVE	Local	Asphalt	24	176	23	493	73	52	80	Strng	Good	0	27	**65**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
25230	11TH AVE	DS@176N SUMMITVIEW AVE	BROWNE AVE	Local	Asphalt	23	166	21	445	85	66	60	Mod	V Good	0	15	**78**
29620	11TH AVE	W YAKIMA AVE	W A ST	Local	Asphalt	38	489	103	2,168	51	56	80	Strng	Fair	17	32	**52**
27340	11TH AVE	W A ST	SUMMITVIEW AVE	Local	Asphalt	30	177	30	620	63	33	80	Strng	Fair	0	37	**52**
31630	11TH AVE	W YAKIMA AVE	W CHESTNUT AVE	Local	Asphalt	34	491	93	1,948	51	45	80	Strng	Marginal	11	38	**48**
34180	11TH AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	32	480	85	1,792	50	50	80	Strng	Fair	19	31	**49**
36490	11TH AVE	W WALNUT ST	W SPRUCE ST	Local	Asphalt	33	481	88	1,852	46	53	80	Strng	Marginal	24	21	**47**
37830	11TH AVE	W SPRUCE ST	W PINE ST	Local	Asphalt	47	474	124	2,599	33	40	80	Strng	Poor	39	28	**35**
39010	11TH AVE	W PINE ST	TIETON DR	Local	Asphalt	57	186	59	1,237	37	29	60	Mod	Poor	43	20	**33**
40400	11TH AVE	TIETON DR	HAYNES ST	Local	Concrete	25	354	49	1,033	58	40	60	Mod	Fair	0	0	**51**
41850	11TH AVE	HAYNES ST	MACLAREN ST	Local	Concrete	25	325	45	948	44	38	60	Mod	Marginal	0	0	**41.1**
43160	11TH AVE	MACLAREN ST	SAINT HELENS ST	Local	Concrete	25	330	46	963	58	44	60	Mod	Fair	0	0	**52.9**
44540	11TH AVE	SAINT HELENS ST	W ARLINGTON ST	Local	Asphalt	29	311	50	1052	46	40	80	Strng	Marginal	21	32	**43.2**
45550	11TH AVE	W ARLINGTON ST	BAKER ST	Local	Asphalt	30	343	57	1201	74	57	60	Mod	Good	16	11	**66.9**
46870	11TH AVE	BAKER ST	DS@343S BAKER ST	Local	Asphalt	32	343	61	1,281	74	60	60	Mod	Good	9	17	**69**
47420	11TH AVE	DS@343S BAKER ST	STEWART ST	Local	Asphalt	30	318	53	1,113	76	56	60	Mod	Good	10	14	**68**
48890	11TH AVE	STEWART ST	W NOB HILL BLVD	Local	Asphalt	30	333	56	1166	78	58	60	Mod	V Good	12	10	**70**
50330	11TH AVE	W NOB HILL BLVD	DS@650S W NOB HILL BLVD	Local	Asphalt	31	650	112	2351	72	50	80	Strng	Good	5	23	**63.5**
52570	11TH AVE	DS@650S W NOB HILL BLVD	W VIOLA AVE	Local	Asphalt	32	672	119	2509	50	43	60	Mod	Marginal	28	22	**46.1**
54610	11TH AVE	W VIOLA AVE	W LOGAN AVE	Local	Asphalt	32	660	117	2464	75	54	80	Strng	Good	7	18	**67.1**
55980	11TH AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	31	658	113	2,380	75	61	60	Mod	V Good	10	15	**70**
59890	11TH AVE	NORTH END	SPOKANE ST	Local	Asphalt	31	347	60	1,255	83	64	60	Mod	V Good	6	11	**76**
60140	11TH AVE	SPOKANE ST	SOUTH END	Local	Asphalt	32	256	46	956	77	57	60	Mod	V Good	12	12	**69**
16600	11TH ST	SOUTH END	STAFF SGT PENDLETON WAY	Local	Asphalt	27	384	58	1,210	57	55	80	Strng	Fair	15	28	**56**
70050	12TH AVE	W YAKIMA AVE	TERRACE ST	Local	Asphalt	49	204	56	1,166	69	45	80	Strng	Good	2	28	**60**
70040	12TH AVE	TERRACE ST	DS@168S TERRACE ST	Local	Asphalt	48	168	45	941	60	72	80	Strng	Good	0	40	**63**
32450	12TH AVE	DS@168S TERRACE ST	W CHESTNUT AVE	Local	Asphalt	44	117	29	601	65	49	80	Strng	Fair	6	29	**59**
70160	12TH AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	40	413	92	1,927	51	67	80	Strng	Fair	11	38	**56**
36660	12TH AVE	W WALNUT ST	W SPRUCE ST	Local	Asphalt	40	506	112	2361	51	61	80	Strng	Fair	8	41	**53.2**
39170	12TH AVE	W SPRUCE ST	TIETON DR	Local	Asphalt	41	531	121	2,540	49	40	80	Strng	Marginal	9	42	**45**
40200	12TH AVE	TIETON DR	SOUTH END	Local	Asphalt	33	283	51	1,077	74	53	80	Strng	Good	5	21	**66**
43110	12TH AVE	MACLAREN ST	SAINT HELENS ST	Local	Asphalt	28	328	51	1,071	77	57	60	Mod	V Good	9	13	**70**
44670	12TH AVE	SAINT HELENS ST	W ARLINGTON ST	Local	Asphalt	28	316	49	1,032	69	47	80	Strng	Good	11	21	**60**
45700	12TH AVE	W ARLINGTON ST	BAKER ST	Local	Asphalt	53	352	104	2,177	34	43	80	Strng	Poor	33	26	**36**
46860	12TH AVE	BAKER ST	DS@325S BAKER ST	Local	Asphalt	54	325	98	2,048	32	53	60	Mod	Poor	37	30	**38**
47500	12TH AVE	DS@325S BAKER ST	STEWART ST	Local	Asphalt	54	327	98	2,060	39	53	60	Mod	Marginal	34	27	**43**
49030	12TH AVE	STEWART ST	W NOB HILL BLVD	Local	Asphalt	55	331	101	2124	50	43	80	Strng	Marginal	23	27	**46.7**
49790	12TH AVE	W NOB HILL BLVD	HAMM AVE	Local	Asphalt	15	331	28	579	73	51	80	Strng	Good	5	22	**65**
50480	12TH AVE	HAMM AVE	W PRASCH AVE	Local	Asphalt	32	335	60	1,251	66	54	80	Strng	Good	12	21	**61**
52420	12TH AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	34	655	124	2,598	76	64	60	Mod	V Good	8	16	**71**
54880	12TH AVE	W VIOLA AVE	W LOGAN AVE	Local	Asphalt	32	675	120	2520	77	60	60	Mod	V Good	9	13	**70.6**
56300	12TH AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	32	652	116	2434	46	29	80	Strng	Marginal	27	27	**39.6**
57530	12TH AVE	W MEAD AVE	W KING ST	Local	Asphalt	40	634	141	2959	65	56	60	Mod	Good	15	20	**60.7**
58370	12TH AVE	W KING ST	SAINT JOHNS ST	Local	Asphalt	44	485	119	2,490	71	78	60	Mod	V Good	14	15	**73**
58750	12TH AVE	SAINT JOHNS ST	W PIERCE ST	Local	Asphalt	27	168	25	529	75	54	80	Strng	Good	5	20	**67**
59650	12TH AVE	W PIERCE ST	SPOKANE ST	Local	Asphalt	31	504	87	1,823	67	69	60	Mod	Good	15	18	**67**
60900	12TH AVE	SPOKANE ST	W WASHINGTON AVE	Local	Asphalt	44	813	199	4173	67	58	60	Mod	Good	17	16	**63.2**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
29780	12TH ST	E MAPLE ST	E BEECH ST	Local	Asphalt	20	594	66	1386	67	48	80	Strng	Good	10	24	**59.6**
31890	12TH ST	E BEECH ST	HIGH ST	Local	Asphalt	25	461	64	1345	72	50	80	Strng	Good	7	21	**63.5**
33760	12TH ST	HIGH ST	E RACE ST	Local	Asphalt	20	274	30	639	76	56	60	Mod	Good	9	14	**68.9**
37130	12TH ST	E ALDER ST	E ADAMS ST	Local	Asphalt	30	516	86	1,806	85	66	60	Mod	V Good	11	4	**78**
53060	12TH ST	E NOB HILL BLVD	E VIOLA AVE	Local	Asphalt	32	1342	239	5010	83	75	60	Mod	V Good	8	8	**79.8**
36620	13TH AVE	W WALNUT ST	W SPRUCE ST	Local	Asphalt	31	504	87	1,823	100	90	60	Mod	Excellent	0	0	**96**
39200	13TH AVE	W SPRUCE ST	TIETON DR	Local	Asphalt	32	463	82	1,729	80	61	60	Mod	V Good	4	16	**72**
40320	13TH AVE	TIETON DR	DS@315S TIETON DR	Local	Asphalt	30	315	53	1,103	63	42	80	Strng	Fair	17	20	**55**
41720	13TH AVE	DS@315S TIETON DR	MACLAREN ST	Local	Asphalt	31	349	60	1,262	73	63	60	Mod	V Good	12	15	**69**
42950	13TH AVE	MACLAREN ST	SAINT HELENS ST	Local	Asphalt	30	335	56	1,173	67	43	80	Strng	Fair	15	18	**58**
44980	13TH AVE	SAINT HELENS ST	W ARLINGTON ST	Local	Asphalt	32	352	63	1,314	52	36	80	Strng	Marginal	17	31	**46**
49760	13TH AVE	W NOB HILL BLVD	HAMM AVE	Local	Asphalt	25	330	46	963	56	34	80	Strng	Marginal	18	26	**48**
50410	13TH AVE	HAMM AVE	W PRASCH AVE	Local	Asphalt	24	333	44	932	47	36	80	Strng	Marginal	31	22	**42**
52510	13TH AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	24	658	88	1842	62	44	80	Strng	Fair	19	19	**54.6**
53660	13TH AVE	W VIOLA AVE	ROYER LN	Local	Asphalt	25	336	47	980	68	49	80	Strng	Good	11	20	**61**
54710	13TH AVE	ROYER LN	DS@330S ROYER LN	Local	Asphalt	24	330	44	924	68	48	80	Strng	Good	12	19	**61**
56280	13TH AVE	DS@330S ROYER LN	W MEAD AVE	Local	Asphalt	24	660	88	1,848	62	44	80	Strng	Fair	18	20	**55**
58710	13TH AVE	W KING ST	W PIERCE ST	Local	Asphalt	31	641	110	2,318	76	56	60	Mod	Good	7	16	**69**
70020	13TH ST	E MAPLE ST	DS@339S E MAPLE ST	Local	Asphalt	42	339	79	1661	71	49	80	Strng	Good	9	19	**63**
29740	13TH ST	DS@339S E MAPLE ST	E BEECH ST	Local	Asphalt	42	297	69	1455	68	42	80	Strng	Fair	0	32	**58.2**
31920	13TH ST	E BEECH ST	HIGH ST	Local	Asphalt	45	463	116	2431	61	49	80	Strng	Fair	4	19	**55.8**
33800	13TH ST	HIGH ST	E RACE ST	Local	Asphalt	25	277	38	808	68	43	60	Mod	Fair	17	15	**58**
37170	13TH ST	NORTH END	E ADAMS ST	Local	Asphalt	23	163	21	437	87	68	60	Mod	V Good	4	10	**79.8**
39780	13TH ST	E ADAMS ST	PACIFIC AVE	Local	Asphalt	26	470	68	1426	82	64	60	Mod	V Good	6	11	**75.4**
50810	13TH ST	E NOB HILL BLVD	SOUTH END	Local	Asphalt	31	627	108	2,268	82	64	60	Mod	V Good	9	9	**75**
51740	13TH ST	NORTH END	DS@254S NORTH END	Local	Asphalt	26	254	37	770	73	52	60	Mod	Good	12	14	**64.7**
53040	13TH ST	DS@254S NORTH END	E VIOLA AVE	Local	Asphalt	28	330	51	1,078	89	70	60	Mod	V Good	4	7	**82**
53900	13TH ST	E VIOLA AVE	SIMPSON LN	Local	Asphalt	28	343	53	1,120	79	60	60	Mod	V Good	9	12	**72**
55020	13TH ST	SIMPSON LN	ILER LN	Local	Asphalt	30	330	55	1,155	66	55	80	Strng	Good	9	5	**62**
56670	13TH ST	ILER LN	E MEAD AVE	Local	Asphalt	30	664	111	2324	82	64	60	Mod	V Good	8	10	**75.4**
7700	14TH AVE	FRUITVALE BLVD	LAUREL ST	Local	Asphalt	22	303	37	778	53	69	80	Strng	Fair	3	6	**57**
11210	14TH AVE	SWAN AVE	WILLOW ST	Local	Asphalt	31	476	82	1,722	73	55	80	Strng	Good	1	26	**66**
70100	14TH AVE	TERRACE ST	DS@183S TERRACE ST	Local	Asphalt	31	183	32	662	61	48	80	Strng	Fair	10	29	**56**
70080	14TH AVE	DS@183S TERRACE ST	W CHESTNUT AVE	Local	Asphalt	29	176	28	595	84	65	60	Mod	V Good	1	15	**77**
34440	14TH AVE	W CHESTNUT AVE	W WALNUT ST	Local	Concrete	24	342	46	958	63	32	60	Mod	Fair	0	0	**52**
36460	14TH AVE	W WALNUT ST	BELL AVE	Local	Concrete	22	368	45	945	58	44	60	Mod	Fair	0	0	**52.6**
36820	14TH AVE	BELL AVE	W SPRUCE ST	Local	Concrete	24	188	25	526	54	42	60	Mod	Fair	0	0	**49.7**
39150	14TH AVE	W SPRUCE ST	TIETON DR	Local	Concrete	23	461	59	1,237	38	46	60	Mod	Marginal	0	0	**41**
41770	14TH AVE	TIETON DR	MACLAREN ST	Local	Asphalt	31	664	114	2401	73	51	60	Mod	Good	16	11	**64.2**
42970	14TH AVE	MACLAREN ST	SAINT HELENS ST	Local	Asphalt	29	335	54	1133	75	55	60	Mod	Good	10	14	**67.3**
44950	14TH AVE	SAINT HELENS ST	W ARLINGTON ST	Local	Asphalt	29	350	56	1,184	79	59	80	Strng	V Good	0	21	**72**
52440	14TH AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	23	656	84	1,760	70	52	80	Strng	Good	10	20	**63**
53690	14TH AVE	W VIOLA AVE	ROYER LN	Local	Asphalt	29	338	54	1144	81	62	60	Mod	V Good	1	19	**73.5**
54650	14TH AVE	ROYER LN	DS@326S ROYER LN	Local	Asphalt	23	326	42	875	75	63	80	Strng	V Good	4	21	**70.2**
56190	14TH AVE	DS@326S ROYER LN	W MEAD AVE	Local	Asphalt	23	660	84	1771	55	51	80	Strng	Fair	20	20	**52.6**
58680	14TH AVE	W KING ST	W PIERCE ST	Local	Asphalt	29	637	103	2155	100	90	60	Mod	Excellent	0	0	**95.6**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
59330	14TH AVE	W PIERCE ST	PERRY CT	Local	Asphalt	31	268	46	969	100	90	60	Mod	Excellent	0	0	**95.6**
59670	14TH AVE	PERRY CT	SPOKANE ST	Local	Asphalt	42	250	58	1225	100	90	60	Mod	Excellent	0	0	**95.6**
59820	14TH AVE	SPOKANE ST	SOUTH END	Local	Asphalt	43	114	27	572	72	50	80	Strng	Good	9	19	**64**
39800	14TH ST	E ADAMS ST	PACIFIC AVE	Local	Asphalt	31	466	80	1,685	79	60	60	Mod	V Good	7	10	**72**
51290	14TH ST	E NOB HILL BLVD	DS@769S E NOB HILL BLVD	Local	Asphalt	27	769	115	2422	78	58	60	Mod	V Good	11	12	**70.2**
51730	14TH ST	DS@769S E NOB HILL BLVD	BURWELL ST	Local	Asphalt	24	242	32	678	82	64	60	Mod	V Good	7	11	**75.4**
53020	14TH ST	BURWELL ST	E VIOLA AVE	Local	Asphalt	27	327	49	1,030	83	64	60	Mod	V Good	12	5	**76**
53820	14TH ST	E VIOLA AVE	SIMPSON LN	Local	Asphalt	28	343	53	1,120	88	69	60	Mod	V Good	5	7	**81**
54960	14TH ST	SIMPSON LN	SOUTH END	Local	Asphalt	28	305	47	996	85	66	60	Mod	V Good	5	10	**78**
7660	15TH AVE	FRUITVALE BLVD	LAUREL ST	Local	Asphalt	28	308	48	1,006	30	31	80	Strng	Poor	24	12	**29**
6960	15TH AVE	LAUREL ST	HATHAWAY ST	Local	Asphalt	20	344	38	803	32	37	80	Strng	Poor	34	30	**33**
12050	15TH AVE	SOUTH END	DS@81N SOUTH END	Local	Asphalt	25	81	11	236	97	88	60	Mod	Excellent	0	3	**93**
11590	15TH AVE	DS@81N SOUTH END	SWAN AVE	Local	Asphalt	35	144	28	588	77	57	60	Mod	V Good	8	14	**69.6**
11160	15TH AVE	SWAN AVE	WILLOW ST	Local	Asphalt	34	476	90	1,888	79	59	80	Strng	V Good	0	21	**72**
9560	15TH AVE	WILLOW ST	GARRETT ST	Local	Asphalt	31	318	55	1150	64	61	80	Strng	Good	12	25	**61.7**
8700	15TH AVE	GARRETT ST	FRUITVALE BLVD	Local	Asphalt	32	345	61	1,288	68	50	80	Strng	Good	10	22	**61**
30050	15TH AVE	SOUTH END	BELMONT AVE	Local	Concrete	20	185	21	432	37	48	60	Mod	Marginal	0	0	**40**
28970	15TH AVE	BELMONT AVE	MT VERNON AVE	Local	Concrete	20	236	26	551	30	26	60	Mod	Poor	0	0	**28**
28040	15TH AVE	MT VERNON AVE	W A ST	Local	Concrete	20	139	15	324	43	21	60	Mod	Poor	0	0	**35**
27350	15TH AVE	W A ST	SUMMITVIEW AVE	Local	Asphalt	28	167	26	546	55	36	80	Strng	Marginal	15	29	**47.9**
31750	15TH AVE	W YAKIMA AVE	DS@175S W YAKIMA AVE	Local	Concrete	26	175	25	531	77	57	60	Mod	V Good	0	0	**70**
33220	15TH AVE	DS@175S W YAKIMA AVE	W CHESTNUT AVE	Local	Concrete	26	182	26	552	53	38	60	Mod	Marginal	0	0	**47**
36440	15TH AVE	W CHESTNUT AVE	BELL AVE	Local	Concrete	26	710	103	2,154	80	61	60	Mod	V Good	0	0	**73**
39230	15TH AVE	BELL AVE	TIETON DR	Local	Concrete	27	650	98	2,048	55	35	60	Mod	Marginal	0	0	**48**
41730	15TH AVE	TIETON DR	MACLAREN ST	Local	Asphalt	27	663	99	2088	73	56	60	Mod	Good	13	14	**66.2**
43040	15TH AVE	MACLAREN ST	SAINT HELENS ST	Local	Asphalt	27	336	50	1058	66	39	80	Strng	Fair	17	17	**55.8**
44920	15TH AVE	SAINT HELENS ST	W ARLINGTON ST	Local	Asphalt	27	350	53	1103	55	31	80	Strng	Marginal	27	18	**45.8**
50420	15TH AVE	NORTH END	W PRASCH AVE	Local	Asphalt	30	343	57	1,201	82	63	60	Mod	V Good	4	14	**75**
52430	15TH AVE	NORTH END	W VIOLA AVE	Local	Asphalt	22	501	61	1286	39	32	80	Strng	Poor	36	25	**35.4**
53670	15TH AVE	W VIOLA AVE	ROYER LN	Local	Asphalt	23	337	43	904	51	26	80	Strng	Marginal	24	25	**42**
54740	15TH AVE	ROYER LN	W LOGAN AVE	Local	Asphalt	23	333	43	894	47	38	80	Strng	Marginal	31	22	**42.6**
56230	15TH AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	22	655	80	1,681	52	29	80	Strng	Marginal	20	28	**43**
58660	15TH AVE	W KING ST	W PIERCE ST	Local	Asphalt	30	633	106	2,216	100	90	60	Mod	Excellent	0	0	**96**
59150	15TH AVE	W PIERCE ST	SOUTH END	Local	Asphalt	25	146	20	426	100	90	60	Mod	Excellent	0	0	**95.6**
60860	15TH AVE	SPOKANE ST	W WASHINGTON AVE	Local	Asphalt	31	663	114	2398	100	90	60	Mod	Excellent	0	0	**95.6**
20950	15TH ST	NORTH END	E CHESTNUT AVE	Local	Asphalt	20	604	67	1409	75	56	60	Mod	Good	8	17	**67.8**
33660	15TH ST	E BEECH ST	E RACE ST	Other	Asphalt	23	736	94	1975	82	63	60	Mod	V Good	8	10	**75.2**
39820	15TH ST	E ADAMS ST	PACIFIC AVE	Local	Asphalt	17	464	44	920	86	67	60	Mod	V Good	5	10	**79**
51050	15TH ST	E NOB HILL BLVD	DS@693S E NOB HILL BLVD	Local	Asphalt	25	693	96	2021	93	78	60	Mod	Excellent	5	3	**87.1**
51710	15TH ST	DS@693S E NOB HILL BLVD	BURWELL ST	Local	Asphalt	28	312	49	1019	57	55	80	Strng	Fair	7	22	**54.9**
52970	15TH ST	BURWELL ST	E VIOLA AVE	Local	Asphalt	28	330	51	1078	78	60	60	Mod	V Good	6	16	**71.3**
53800	15TH ST	E VIOLA AVE	SIMPSON LN	Local	Asphalt	24	343	46	960	71	48	80	Strng	Good	8	13	**62.2**
54970	15TH ST	SIMPSON LN	SOUTH END	Local	Asphalt	26	306	44	928	83	64	60	Mod	V Good	6	12	**75.7**
73990	16TH AVE	US 12 HWY RAMP	WEST END	Local	Asphalt	34	289	55	1146	68	44	80	Strng	Good	2	29	**59.1**
74000	16TH AVE	US 12 HWY RAMP	US 12 HWY RAMP	Truck Route	Asphalt	39	686	149	3121	90	89	60	Mod	Excellent	4	6	**89.1**
7620	16TH AVE	FRUITVALE BLVD	HATHAWAY ST	Truck Route	Asphalt	48	652	174	3651	62	75	60	Mod	Good	16	22	**65.7**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
6050	16TH AVE	HATHAWAY ST	W J ST	Truck Route	Asphalt	52	326	94	1978	79	84	60	Mod	V Good	0	21	**79.9**
5280	16TH AVE	W J ST	MADISON AVE	Truck Route	Asphalt	53	331	97	2047	72	64	80	Strng	Good	3	24	**68.7**
4780	16TH AVE	MADISON AVE	RIVER RD	Truck Route	Asphalt	53	671	198	4149	68	70	60	Mod	Good	10	22	**68**
4210	16TH AVE	RIVER RD	W O ST	Truck Route	Asphalt	68	329	124	2610	79	67	60	Mod	V Good	9	12	**73.9**
3560	16TH AVE	W O ST	HAMBELTON BLVD	Truck Route	Asphalt	68	101	38	801	85	80	60	Mod	V Good	0	15	**82.8**
3490	16TH AVE	HAMBELTON BLVD	PRIVATE RD	Truck Route	Asphalt	65	784	283	5945	79	84	60	Mod	V Good	5	16	**80.4**
3010	16TH AVE	PRIVATE RD	DS@277N PRIVATE RD	Truck Route	Asphalt	60	277	92	1939	77	85	60	Mod	V Good	4	19	**79.3**
2780	16TH AVE	DS@277N PRIVATE RD	US 12 HWY RAMP	Truck Route	Asphalt	52	369	107	2239	83	88	60	Mod	V Good	0	17	**84.1**
20700	16TH AVE	W LINCOLN AVE	DS@158N W LINCOLN AVE	Truck Route	Asphalt	58	158	51	1,069	78	59	60	Mod	V Good	15	6	**71**
19400	16TH AVE	DS@158N W LINCOLN AVE	GARFIELD AVE	Truck Route	Asphalt	57	166	53	1,104	75	78	60	Mod	V Good	15	10	**76**
18950	16TH AVE	GARFIELD AVE	DS@156N GARFIELD AVE	Truck Route	Asphalt	53	156	46	965	93	93	60	Mod	Excellent	0	7	**92.1**
17830	16TH AVE	DS@156N GARFIELD AVE	MCKINLEY AVE	Truck Route	Asphalt	53	183	54	1132	86	84	60	Mod	Excellent	0	14	**84.6**
17120	16TH AVE	MCKINLEY AVE	DS@157N MCKINLEY AVE	Truck Route	Asphalt	55	157	48	1007	95	84	60	Mod	Excellent	0	5	**90.6**
16460	16TH AVE	DS@157N MCKINLEY AVE	ROOSEVELT AVE	Truck Route	Asphalt	53	163	48	1008	93	90	60	Mod	Excellent	0	7	**90.8**
16030	16TH AVE	ROOSEVELT AVE	ENGLEWOOD AVE	Truck Route	Asphalt	55	342	105	2195	84	82	60	Mod	V Good	0	16	**82.8**
14350	16TH AVE	ENGLEWOOD AVE	DS@317N ENGLEWOOD AVE	Truck Route	Asphalt	51	317	90	1886	75	79	60	Mod	V Good	4	21	**75.7**
13060	16TH AVE	DS@317N ENGLEWOOD AVE	JEROME AVE	Truck Route	Asphalt	49	349	95	1995	83	82	60	Mod	V Good	3	13	**82.1**
11870	16TH AVE	JEROME AVE	SWAN AVE	Truck Route	Asphalt	50	203	56	1184	95	100	60	Mod	Excellent	0	5	**95.6**
11190	16TH AVE	SWAN AVE	WILLOW ST	Truck Route	Asphalt	52	461	133	2797	94	99	60	Mod	Excellent	0	6	**94.7**
9840	16TH AVE	WILLOW ST	GARRETT ST	Truck Route	Asphalt	54	317	95	1997	78	83	60	Mod	V Good	2	20	**78.6**
8740	16TH AVE	GARRETT ST	FRUITVALE BLVD	Truck Route	Asphalt	53	362	107	2238	76	84	60	Mod	V Good	7	17	**77.6**
26540	16TH AVE	SUMMITVIEW AVE	BROWNE AVE	Truck Route	Asphalt	51	345	98	2053	67	69	60	Mod	Good	15	18	**66.2**
24350	16TH AVE	BROWNE AVE	DS@170N BROWNE AVE	Truck Route	Asphalt	49	170	46	972	83	84	60	Mod	V Good	11	6	**82.8**
23690	16TH AVE	DS@170N BROWNE AVE	FOLSOM AVE	Truck Route	Asphalt	48	158	42	885	78	81	60	Mod	V Good	6	16	**78.5**
23170	16TH AVE	FOLSOM AVE	MONROE AVE	Truck Route	Asphalt	47	143	37	784	89	70	60	Mod	V Good	4	7	**82.1**
22490	16TH AVE	MONROE AVE	W LINCOLN AVE	Truck Route	Asphalt	57	521	165	3465	93	79	60	Mod	Excellent	0	7	**87.6**
30800	16TH AVE	W YAKIMA AVE	DS@197N W YAKIMA AVE	Truck Route	Asphalt	50	197	55	1149	80	78	60	Mod	V Good	11	10	**78.1**
30060	16TH AVE	DS@197N W YAKIMA AVE	PARK LN	Truck Route	Asphalt	47	55	14	302	92	76	60	Mod	Excellent	0	8	**85.9**
29900	16TH AVE	PARK LN	BELMONT AVE	Truck Route	Asphalt	47	131	34	718	95	84	60	Mod	Excellent	0	5	**90.5**
28990	16TH AVE	BELMONT AVE	MT VERNON AVE	Truck Route	Asphalt	48	238	63	1333	84	93	60	Mod	Excellent	3	13	**86.1**
28030	16TH AVE	MT VERNON AVE	W A ST	Truck Route	Asphalt	49	137	37	783	51	82	60	Mod	Good	18	31	**60.1**
27450	16TH AVE	W A ST	SUMMITVIEW AVE	Truck Route	Asphalt	53	170	50	1051	59	58	80	Strng	Fair	15	26	**57.7**
31740	16TH AVE	N 16TH AVE	DS@175S N 16TH AVE	Truck Route	Asphalt	51	175	50	1,041	77	68	60	Mod	V Good	4	19	**73**
33180	16TH AVE	DS@175S N 16TH AVE	W CHESTNUT AVE	Truck Route	Asphalt	51	181	51	1077	92	84	60	Mod	Excellent	0	8	**88.9**
36400	16TH AVE	W CHESTNUT AVE	BELL AVE	Truck Route	Asphalt	45	709	177	3722	89	85	60	Mod	Excellent	4	7	**87.1**
39120	16TH AVE	BELL AVE	TIETON DR	Truck Route	Asphalt	45	650	163	3,413	81	79	60	Mod	V Good	7	12	**79**
41690	16TH AVE	TIETON DR	MACLAREN ST	Truck Route	Asphalt	44	663	162	3403	76	85	60	Mod	V Good	9	14	**78.6**
43070	16TH AVE	MACLAREN ST	SAINT HELENS ST	Truck Route	Asphalt	46	337	86	1809	87	82	60	Mod	Excellent	3	9	**84.9**
44870	16TH AVE	SAINT HELENS ST	W ARLINGTON ST	Truck Route	Asphalt	46	330	84	1771	92	92	60	Mod	Excellent	0	8	**91.2**
46820	16TH AVE	W ARLINGTON ST	BONNIE DOONE AVE	Truck Route	Asphalt	48	658	175	3,685	89	94	60	Mod	Excellent	3	8	**90**
47590	16TH AVE	BONNIE DOONE AVE	DS@344S BONNIE DOONE AVE	Truck Route	Asphalt	47	344	90	1886	85	89	60	Mod	Excellent	3	11	**85.8**
49100	16TH AVE	DS@344S BONNIE DOONE AVE	W NOB HILL BLVD	Truck Route	Asphalt	47	320	84	1,755	78	79	30	Weak	V Good	17	5	**78**
50440	16TH AVE	W NOB HILL BLVD	W PRASCH AVE	Truck Route	Asphalt	48	662	177	3,707	78	73	60	Mod	V Good	8	14	**76**
75400	16TH AVE	W PRASCH AVE	W PRASCH AVE	Principal Arterial	Asphalt	48	39	10	218	95	84	60	Mod	Excellent	0	6	**90**
51580	16TH AVE	W PRASCH AVE	GRANT ST	Truck Route	Asphalt	50	321	89	1,873	75	82	60	Mod	V Good	7	17	**77**
52480	16TH AVE	GRANT ST	W VIOLA AVE	Truck Route	Asphalt	49	297	81	1,698	65	85	60	Mod	V Good	11	24	**70**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
54110	16TH AVE	W VIOLA AVE	W LOGAN AVE	Truck Route	Asphalt	50	530	147	3,092	76	79	60	Mod	V Good	9	15	**76**
54760	16TH AVE	W LOGAN AVE	W LOGAN AVE	Truck Route	Asphalt	50	140	39	817	83	80	60	Mod	V Good	5	12	**82**
55350	16TH AVE	W LOGAN AVE	PLATH AVE	Truck Route	Asphalt	44	304	74	1,561	82	85	60	Mod	V Good	4	14	**83**
56250	16TH AVE	PLATH AVE	W MEAD AVE	Truck Route	Asphalt	48	351	94	1,966	63	81	60	Mod	Good	14	22	**68**
57240	16TH AVE	W MEAD AVE	W KING ST	Truck Route	Asphalt	49	475	129	2,715	66	83	60	Mod	V Good	12	22	**71**
57990	16TH AVE	W KING ST	DRAKE CT	Truck Route	Asphalt	50	286	79	1668	69	92	60	Mod	V Good	12	19	**75.7**
58210	16TH AVE	DRAKE CT	TAHOMA AVE	Truck Route	Asphalt	51	210	60	1250	64	92	60	Mod	V Good	14	22	**72.1**
58650	16TH AVE	TAHOMA AVE	W PIERCE ST	Truck Route	Asphalt	50	302	84	1762	77	88	60	Mod	V Good	3	19	**80.4**
59490	16TH AVE	W PIERCE ST	PERRY LP	Truck Route	Asphalt	51	367	104	2184	68	78	60	Mod	V Good	14	18	**70.4**
59860	16TH AVE	PERRY LP	SPOKANE ST	Truck Route	Asphalt	50	287	80	1,674	64	77	60	Mod	Good	14	22	**67**
60830	16TH AVE	SPOKANE ST	W WASHINGTON AVE	Truck Route	Asphalt	59	671	220	4619	68	71	60	Mod	Good	14	19	**67.8**
61410	16TH AVE	W WASHINGTON AVE	DS@323S W WASHINGTON AVE	Truck Route	Asphalt	60	323	108	2261	79	67	60	Mod	V Good	0	21	**74.2**
61750	16TH AVE	DS@323S W WASHINGTON AVE	DS@675S W WASHINGTON AVE	Truck Route	Asphalt	50	352	98	2,053	61	88	60	Mod	V Good	8	30	**69**
71110	16TH AVE	DS@675S W WASHINGTON AVE	VALLEY MALL BLVD	Truck Route	Asphalt	51	1731	490	10299	54	88	60	Mod	Good	16	30	**64.2**
71050	16TH AVE	VALLEY MALL BLVD	WALLA WALLA ST	Truck Route	Asphalt	26	1112	161	3373	82	88	60	Mod	V Good	10	8	**83.4**
71070	16TH AVE	WALLA WALLA ST	DS@436S WALLA WALLA ST	Truck Route	Asphalt	27	436	65	1373	80	95	60	Mod	Excellent	3	16	**84.7**
71060	16TH AVE	DS@436S WALLA WALLA ST	DS@743S WALLA WALLA ST	Truck Route	Asphalt	25	306	43	893	88	99	60	Mod	Excellent	4	8	**91**
65320	16TH AVE	DS@743S WALLA WALLA ST	AHTANUM RD	Truck Route	Asphalt	54	1,319	396	8,310	60	78	60	Mod	Good	15	25	**65**
65830	16TH AVE	AHTANUM RD	DS@364S AHTANUM RD	Major Collector	Asphalt	34	364	69	1,444	71	65	60	Mod	Good	9	20	**68**
51060	16TH ST	E NOB HILL BLVD	DS@693S E NOB HILL BLVD	Local	Asphalt	30	693	116	2,426	74	60	80	Strng	Good	3	22	**69**
52990	16TH ST	DS@693S E NOB HILL BLVD	E VIOLA AVE	Local	Asphalt	24	644	86	1,803	74	78	60	Mod	V Good	3	22	**75**
53780	16TH ST	E VIOLA AVE	SIMPSON LN	Local	Asphalt	33	341	63	1,313	57	55	80	Strng	Fair	0	43	**55**
55110	16TH ST	SIMPSON LN	SOUTH END	Local	Asphalt	28	359	56	1,173	86	67	60	Mod	V Good	5	10	**79**
36360	17TH AVE	W CHESTNUT AVE	BELL AVE	Local	Concrete	29	703	113	2,378	39	33	60	Mod	Poor	0	0	**36**
38980	17TH AVE	BELL AVE	TIETON DR	Local	Concrete	27	647	97	2,038	25	37	60	Mod	Poor	0	0	**28**
41660	17TH AVE	TIETON DR	MACLAREN ST	Local	Concrete	29	663	107	2243	39	40	60	Mod	Poor	0	0	**38.4**
43100	17TH AVE	MACLAREN ST	DS@345S MACLAREN ST	Local	Concrete	29	345	56	1,167	39	41	60	Mod	Poor	0	0	**39**
44810	17TH AVE	DS@345S MACLAREN ST	W ARLINGTON ST	Local	Concrete	30	325	54	1,138	42	43	60	Mod	Marginal	0	0	**42**
46610	17TH AVE	W ARLINGTON ST	BONNIE DOONE AVE	Local	Concrete	24	656	87	1,837	50	51	60	Mod	Fair	0	0	**49**
47560	17TH AVE	BONNIE DOONE AVE	STEWART ST	Local	Asphalt	19	344	36	763	19	26	80	Strng	V Poor	43	38	**20**
48700	17TH AVE	STEWART ST	W NOB HILL BLVD	Local	Asphalt	23	321	41	861	39	39	80	Strng	Poor	32	29	**38**
50860	17TH AVE	NORTH END	W PRASCH AVE	Local	Asphalt	21	301	35	737	71	48	60	Mod	Good	12	17	**63**
20990	17TH ST	E YAKIMA AVE	E CHESTNUT AVE	Local	Asphalt	40	719	160	3355	55	57	60	Mod	Fair	30	15	**54.3**
51070	17TH ST	E NOB HILL BLVD	DS@694S E NOB HILL BLVD	Local	Asphalt	31	694	120	2,510	67	72	60	Mod	Good	9	25	**68**
53080	17TH ST	DS@694S E NOB HILL BLVD	E VIOLA AVE	Local	Asphalt	23	648	83	1739	74	78	60	Mod	V Good	0	26	**74.6**
53830	17TH ST	E VIOLA AVE	SIMPSON LN	Local	Asphalt	24	340	45	952	81	62	80	Strng	V Good	0	20	**73.5**
55100	17TH ST	SIMPSON LN	SOUTH END	Local	Asphalt	25	356	49	1,038	83	64	60	Mod	V Good	7	10	**76**
14340	18TH AVE	ENGLEWOOD AVE	DS@321N ENGLEWOOD AVE	Local	Asphalt	29	321	52	1,086	100	90	60	Mod	Excellent	0	0	**96**
13030	18TH AVE	DS@321N ENGLEWOOD AVE	JEROME AVE	Local	Asphalt	43	345	82	1,731	64	40	80	Strng	Fair	13	23	**55**
11830	18TH AVE	JEROME AVE	SWAN AVE	Local	Asphalt	39	332	72	1,511	86	67	60	Mod	V Good	4	10	**79**
10690	18TH AVE	SWAN AVE	WILLOW ST	Local	Asphalt	36	337	67	1,415	77	57	80	Strng	V Good	0	23	**69**
9710	18TH AVE	WILLOW ST	GARRETT ST	Local	Asphalt	32	331	59	1236	60	33	60	Mod	Fair	24	16	**50**
8680	18TH AVE	GARRETT ST	FRUITVALE BLVD	Local	Asphalt	44	343	84	1,761	80	61	80	Strng	V Good	0	20	**73**
16890	18TH AVE	MCKINLEY AVE	ROOSEVELT AVE	Local	Asphalt	31	282	49	1,020	76	58	60	Mod	Good	19	5	**69**
16070	18TH AVE	ROOSEVELT AVE	ENGLEWOOD AVE	Local	Asphalt	36	352	70	1,478	86	67	60	Mod	V Good	4	10	**79**
20600	18TH AVE	W LINCOLN AVE	NORTH END	Local	Asphalt	26	528	76	1,602	49	51	80	Strng	Marginal	7	44	**49**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
26460	18TH AVE	SUMMITVIEW AVE	BROWNE AVE	Local	Concrete	25	337	47	983	42	37	60	Mod	Marginal	0	0	**39.9**
24290	18TH AVE	BROWNE AVE	NORTH END	Local	Concrete	24	617	82	1,728	52	44	60	Mod	Marginal	0	0	**49**
29650	18TH AVE	PARK AVE	ELEANOR ST	Local	Concrete	26	321	46	974	69	44	60	Mod	Good	0	0	**60**
28100	18TH AVE	ELEANOR ST	SUMMITVIEW AVE	Local	Concrete	41	327	74	1564	47	30	60	Mod	Marginal	0	0	**40.5**
33460	18TH AVE	W YAKIMA AVE	W CHESTNUT AVE	Local	Concrete	20	356	40	831	47	25	60	Mod	Poor	0	0	**39**
34000	18TH AVE	W CHESTNUT AVE	GRAHAM ST	Local	Concrete	24	189	25	529	39	33	60	Mod	Poor	0	0	**36.6**
36290	18TH AVE	GRAHAM ST	BELL AVE	Local	Concrete	24	480	64	1344	37	34	60	Mod	Poor	0	0	**35.7**
38910	18TH AVE	BELL AVE	TIETON DR	Local	Concrete	25	640	89	1,867	39	30	60	Mod	Poor	0	0	**35**
41620	18TH AVE	TIETON DR	MACLAREN ST	Local	Concrete	23	665	85	1784	74	54	60	Mod	Good	0	0	**66.9**
42850	18TH AVE	MACLAREN ST	DS@338S MACLAREN ST	Local	Asphalt	24	338	45	946	41	45	80	Strng	Marginal	26	33	**41**
44690	18TH AVE	DS@338S MACLAREN ST	W ARLINGTON ST	Local	Asphalt	24	332	44	930	44	38	80	Strng	Marginal	26	30	**41**
46470	18TH AVE	W ARLINGTON ST	BONNIE DOONE AVE	Local	Asphalt	22	655	80	1,681	37	49	80	Strng	Marginal	31	32	**40**
47540	18TH AVE	BONNIE DOONE AVE	STEWART ST	Local	Asphalt	22	345	42	886	38	39	80	Strng	Poor	31	30	**38**
48680	18TH AVE	STEWART ST	W NOB HILL BLVD	Local	Asphalt	22	318	39	816	35	25	80	Strng	Poor	29	36	**31**
50050	18TH AVE	W NOB HILL BLVD	SOUTH END	Local	Asphalt	28	489	75	1,572	59	25	80	Strng	Marginal	17	24	**46**
51320	18TH AVE	W PRASCH AVE	DS@157S W PRASCH AVE	Local	Asphalt	23	157	20	421	82	63	60	Mod	V Good	0	18	**75**
51550	18TH AVE	DS@157S W PRASCH AVE	GRANT ST	Local	Asphalt	23	157	20	421	70	50	80	Strng	Good	10	20	**63**
52020	18TH AVE	GRANT ST	DS@197S GRANT ST	Local	Asphalt	23	197	25	529	81	62	60	Mod	V Good	4	15	**74**
53540	18TH AVE	DS@197S GRANT ST	GREENWAY ST	Local	Asphalt	18	322	32	676	80	61	60	Mod	V Good	4	15	**73**
54700	18TH AVE	GREENWAY ST	DS@458S GREENWAY ST	Local	Asphalt	22	458	56	1,176	66	56	80	Strng	Good	8	26	**62**
55280	18TH AVE	DS@458S GREENWAY ST	PLATH AVE	Local	Asphalt	21	298	35	730	70	50	80	Strng	Good	7	23	**63**
56160	18TH AVE	PLATH AVE	W MEAD AVE	Local	Asphalt	19	358	38	794	35	55	80	Strng	Marginal	29	35	**40.8**
56990	18TH AVE	W MEAD AVE	LOREN AVE	Local	Asphalt	19	295	31	654	33	41	80	Strng	Poor	30	37	**35.1**
57180	18TH AVE	LOREN AVE	W KING ST	Local	Asphalt	22	169	21	434	51	41	80	Strng	Marginal	22	27	**46.4**
57940	18TH AVE	W KING ST	CEDAR HILLS CT	Local	Asphalt	25	259	36	755	79	63	60	Mod	V Good	5	16	**72.7**
58180	18TH AVE	CEDAR HILLS CT	TAHOMA AVE	Local	Asphalt	30	238	40	833	62	50	80	Strng	Fair	14	24	**56.9**
17540	18TH ST	E YAKIMA AVE	E YAKIMA AVE	Local	Asphalt	39	517	112	2,352	52	65	60	Mod	Fair	23	25	**55**
18760	18TH ST	E YAKIMA AVE	DS@233S E YAKIMA AVE	Local	Asphalt	32	233	41	870	55	74	60	Mod	Good	16	30	**60**
21350	18TH ST	DS@233S E YAKIMA AVE	DS@834S E YAKIMA AVE	Local	Asphalt	20	601	67	1,402	52	45	60	Mod	Marginal	29	19	**48**
23520	18TH ST	DS@834S E YAKIMA AVE	RIVERSIDE ST	Local	Asphalt	23	505	65	1355	81	74	60	Mod	V Good	5	14	**78.1**
18770	18TH ST	E YAKIMA AVE	S 18TH ST	Local	Asphalt	34	449	85	1781	61	50	80	Strng	Fair	12	27	**56.3**
42670	18TH ST	PACIFIC AVE	LA SALLE ST	Major Collector	Asphalt	40	948	211	4424	46	77	60	Mod	Fair	29	26	**54.9**
45250	18TH ST	LA SALLE ST	E ARLINGTON ST	Major Collector	Asphalt	40	429	95	2002	65	75	60	Mod	Good	16	20	**66.9**
47040	18TH ST	E ARLINGTON ST	CENTRAL AVE	Major Collector	Asphalt	38	644	136	2855	55	65	60	Mod	Fair	21	24	**57.7**
47230	18TH ST	CENTRAL AVE	SLIGER RD	Major Collector	Asphalt	38	185	39	820	79	79	60	Mod	V Good	6	16	**78**
47600	18TH ST	SLIGER RD	DALTON LN	Major Collector	Asphalt	43	147	35	737	66	69	60	Mod	Good	19	15	**66**
72090	18TH ST	DALTON LN	E NOB HILL BLVD	Major Collector	Asphalt	53	349	103	2,158	71	50	80	Strng	Good	11	18	**63**
72080	18TH ST	E NOB HILL BLVD	BOGGESS LN	Major Collector	Asphalt	43	331	79	1,661	73	60	60	Mod	Good	11	16	**67**
51080	18TH ST	BOGGESS LN	DS@360S BOGGESS LN	Major Collector	Asphalt	46	360	92	1,932	66	69	60	Mod	Good	16	18	**65**
51690	18TH ST	DS@360S BOGGESS LN	BIRCH ST	Major Collector	Asphalt	46	293	75	1,572	43	64	60	Mod	Marginal	34	19	**49**
53190	18TH ST	BIRCH ST	E VIOLA AVE	Major Collector	Asphalt	45	359	90	1,885	56	83	60	Mod	Good	28	16	**64**
53870	18TH ST	E VIOLA AVE	SIMPSON LN	Major Collector	Asphalt	45	339	85	1,780	56	69	60	Mod	Good	24	20	**60**
55160	18TH ST	SIMPSON LN	DS@428S SIMPSON LN	Major Collector	Asphalt	44	428	105	2197	40	54	60	Mod	Marginal	30	30	**43.8**
55410	18TH ST	DS@428S SIMPSON LN	DS@651S SIMPSON LN	Major Collector	Asphalt	44	223	55	1145	57	56	60	Mod	Fair	23	20	**55.5**
56730	18TH ST	DS@651S SIMPSON LN	E MEAD AVE	Major Collector	Asphalt	44	360	88	1848	68	56	80	Strng	Good	11	22	**62.7**
11850	19TH AVE	JEROME AVE	SWAN AVE	Local	Asphalt	34	339	64	1,345	68	44	80	Strng	Good	7	25	**59**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
10640	19TH AVE	SWAN AVE	WILLOW ST	Local	Asphalt	32	332	59	1239	74	52	80	Strng	Good	4	22	**65.7**
32000	19TH AVE	W YAKIMA AVE	DS@176S W YAKIMA AVE	Local	Asphalt	20	176	20	411	30	17	80	Strng	Poor	39	32	**24.6**
33430	19TH AVE	DS@176S W YAKIMA AVE	W CHESTNUT AVE	Local	Asphalt	18	181	18	380	30	13	80	Strng	V Poor	33	38	**23.3**
34030	19TH AVE	W CHESTNUT AVE	GRAHAM ST	Local	Concrete	24	182	24	510	70	46	60	Mod	Good	0	0	**61**
36270	19TH AVE	GRAHAM ST	BELL AVE	Local	Asphalt	22	478	58	1,227	89	75	60	Mod	V Good	0	11	**84**
38880	19TH AVE	BELL AVE	TIETON DR	Local	Composite	29	661	106	2,236	91	75	60	Mod	Excellent	0	9	**85**
41580	19TH AVE	TIETON DR	MACLAREN ST	Local	Asphalt	31	663	114	2,398	79	59	60	Mod	V Good	5	17	**72**
43550	19TH AVE	MACLAREN ST	DS@412S MACLAREN ST	Local	Asphalt	23	412	53	1,106	81	64	60	Mod	V Good	3	16	**75**
44640	19TH AVE	DS@412S MACLAREN ST	W ARLINGTON ST	Local	Asphalt	23	259	33	695	80	61	80	Strng	V Good	1	19	**73**
46430	19TH AVE	W ARLINGTON ST	BONNIE DOONE AVE	Local	Asphalt	22	656	80	1,684	71	50	80	Strng	Good	7	22	**64**
48650	19TH AVE	BONNIE DOONE AVE	W NOB HILL BLVD	Local	Asphalt	22	664	81	1,704	69	45	60	Mod	Good	17	14	**60**
50820	19TH AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	23	709	91	1,902	68	47	80	Strng	Good	9	23	**60**
53850	19TH ST	E VIOLA AVE	SIMPSON LN	Local	Asphalt	28	337	52	1,101	93	78	60	Mod	Excellent	4	3	**87**
54990	19TH ST	SIMPSON LN	SOUTH END	Local	Asphalt	25	355	49	1,035	99	90	60	Mod	Excellent	0	1	**95**
17270	1ST AVE	W LINCOLN AVE	W D ST	Local	Concrete	46	488	125	2,619	77	58	60	Mod	V Good	0	0	**70**
15220	1ST AVE	W D ST	DS@224N W D ST	Local	Concrete	55	224	68	1,437	94	81	60	Mod	Excellent	0	0	**89**
14620	1ST AVE	DS@224N W D ST	DS@738N W D ST	Local	Concrete	49	514	140	2,938	97	88	60	Mod	Excellent	0	0	**94**
12470	1ST AVE	DS@738N W D ST	DS@911N W D ST	Local	Concrete	47	173	45	949	100	90	60	Mod	Excellent	0	0	**96**
12040	1ST AVE	DS@911N W D ST	DS@1299N W D ST	Local	Concrete	47	388	101	2,128	91	71	60	Mod	V Good	0	0	**84**
10570	1ST AVE	DS@1299N W D ST	QUINCE ST	Local	Concrete	49	827	225	4,728	93	81	60	Mod	Excellent	0	0	**89**
8350	1ST AVE	QUINCE ST	W I ST	Local	Concrete	47	900	235	4,935	90	70	60	Mod	V Good	0	0	**83**
19230	1ST AVE	W MARTIN LUTHER KING JR BLVD	W LINCOLN AVE	Local	Concrete	45	477	119	2,504	94	82	60	Mod	Excellent	0	0	**90**
23480	1ST AVE	W YAKIMA AVE	DS@481N W YAKIMA AVE	Local	Concrete	25	481	67	1,403	85	67	60	Mod	V Good	0	0	**79**
21520	1ST AVE	DS@481N W YAKIMA AVE	W MARTIN LUTHER KING JR BLVD	Local	Concrete	44	491	120	2,520	90	70	60	Mod	V Good	0	0	**83**
25290	1ST AVE	W YAKIMA AVE	DS@469S W YAKIMA AVE	Local	Asphalt	44	469	115	2,408	39	18	80	Strng	Poor	15	35	**31**
28130	1ST AVE	DS@469S W YAKIMA AVE	W WALNUT ST	Local	Asphalt	46	501	128	2,689	46	36	80	Strng	Marginal	15	35	**41**
34880	1ST AVE	W PINE ST	DS@473S W PINE ST	Local	Asphalt	21	473	55	1,159	27	52	80	Strng	Poor	38	35	**34**
38870	1ST AVE	DS@473S W PINE ST	SE END	Local	Asphalt	21	1,115	130	2,732	39	51	80	Strng	Marginal	30	31	**42**
43370	1ST AVE	PEACH ST	DS@438S PEACH ST	Local	Asphalt	23	438	56	1,175	69	53	60	Mod	Good	16	14	**63**
44770	1ST AVE	DS@438S PEACH ST	W ARLINGTON ST	Local	Asphalt	21	305	36	747	63	43	80	Strng	Fair	13	25	**55**
46710	1ST AVE	W ARLINGTON ST	STEWART ST	Local	Asphalt	29	662	107	2240	37	39	80	Strng	Poor	31	32	**36.6**
49130	1ST AVE	STEWART ST	W NOB HILL BLVD	Local	Asphalt	28	671	104	2192	33	40	80	Strng	Poor	34	33	**34.2**
50500	1ST AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	30	661	110	2314	73	56	60	Mod	Good	8	19	**66.2**
52680	1ST AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	30	663	111	2321	82	65	60	Mod	V Good	0	18	**75.7**
54680	1ST AVE	W VIOLA AVE	W LOGAN AVE	Local	Asphalt	29	657	106	2223	75	57	60	Mod	Good	10	14	**68.2**
56350	1ST AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	28	670	104	2189	72	56	80	Strng	Good	5	24	**65.7**
56860	1ST AVE	W MEAD AVE	DS@188S W MEAD AVE	Local	Asphalt	28	188	29	614	100	90	60	Mod	Excellent	0	0	**95.6**
57770	1ST AVE	DS@188S W MEAD AVE	W KING ST	Local	Asphalt	24	474	63	1327	81	68	60	Mod	V Good	10	9	**75.7**
59010	1ST AVE	W KING ST	W PIERCE ST	Local	Asphalt	22	667	82	1,712	87	68	60	Mod	V Good	4	9	**80**
5480	1ST ST	E J ST	DS@397N E J ST	Truck Route	Asphalt	35	397	77	1,621	68	49	60	Mod	Good	25	7	**99**
4960	1ST ST	DS@397N E J ST	BARTLETT PL	Truck Route	Asphalt	32	378	67	1,411	68	51	60	Mod	Good	21	11	**99**
4470	1ST ST	BARTLETT PL	E N ST	Truck Route	Asphalt	63	667	233	4,902	66	56	60	Mod	Good	22	13	**99**
3580	1ST ST	E N ST	OAK ST	Truck Route	Asphalt	63	346	121	2,543	98	89	60	Mod	Excellent	0	2	**94**
3370	1ST ST	OAK ST	SYCAMORE ST	Truck Route	Asphalt	63	188	66	1382	93	82	60	Mod	Excellent	4	3	**88.7**
3230	1ST ST	SYCAMORE ST	SYCAMORE ST	Truck Route	Asphalt	62	130	45	940	97	88	60	Mod	Excellent	0	3	**93**
3100	1ST ST	SYCAMORE ST	DS@144N SYCAMORE ST	Truck Route	Asphalt	62	144	50	1,042	98	92	60	Mod	Excellent	0	2	**95**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
3040	1ST ST	DS@144N SYCAMORE ST	TAMARACK AVE	Truck Route	Asphalt	64	202	72	1,508	96	87	60	Mod	Excellent	0	4	**93**
2910	1ST ST	TAMARACK AVE	E R ST	Truck Route	Asphalt	60	469	156	3,283	91	81	60	Mod	Excellent	3	6	**87**
2660	1ST ST	E R ST	DS@402N E R ST	Truck Route	Asphalt	62	402	138	2,908	86	89	60	Mod	Excellent	9	6	**86**
72210	1ST ST	DS@402N E R ST	I 82 RAMP EB	Truck Route	Asphalt	74	118	49	1,019	91	92	60	Mod	Excellent	6	3	**91**
72220	1ST ST	I 82 RAMP EB	I 82 RAMP WB	Truck Route	Asphalt	67	243	90	1,899	74	80	60	Mod	V Good	10	16	**75**
17820	1ST ST	E MARTIN LUTHER KING JR BLVD	E LINCOLN AVE	Truck Route	Asphalt	64	479	170	3577	56	57	60	Mod	Fair	23	21	**54.9**
16140	1ST ST	E LINCOLN AVE	E D ST	Truck Route	Asphalt	62	484	167	3,501	44	68	60	Mod	Fair	34	22	**51**
13730	1ST ST	E D ST	E E ST	Truck Route	Asphalt	64	477	170	3562	24	69	60	Mod	Poor	45	31	**37.8**
12390	1ST ST	E E ST	E F ST	Truck Route	Asphalt	62	478	165	3,458	38	76	60	Mod	Fair	32	29	**50**
10790	1ST ST	E F ST	E G ST	Truck Route	Asphalt	65	481	174	3,648	45	69	60	Mod	Fair	29	26	**52**
9270	1ST ST	E G ST	E H ST	Truck Route	Asphalt	63	501	175	3,682	42	62	60	Mod	Marginal	31	27	**47**
8160	1ST ST	E H ST	DS@270 S E I ST	Truck Route	Asphalt	63	518	181	3,807	40	70	60	Mod	Fair	35	25	**49**
6840	1ST ST	DS@270 S E I ST	E I ST	Truck Route	Asphalt	60	270	90	1,890	50	69	60	Mod	Fair	27	23	**56**
6190	1ST ST	E I ST	E J ST	Truck Route	Asphalt	33	211	39	812	59	51	60	Mod	Fair	20	22	**55**
22240	1ST ST	E YAKIMA AVE	DS@190N E YAKIMA AVE	Truck Route	Asphalt	68	190	72	1,507	58	47	60	Mod	Fair	26	16	**53**
21420	1ST ST	DS@190N E YAKIMA AVE	STAFF SGT PENDLETON WAY	Truck Route	Asphalt	68	297	112	2,356	60	72	60	Mod	Good	21	14	**63**
20390	1ST ST	STAFF SGT PENDLETON WAY	E MARTIN LUTHER KING JR BLVD	Truck Route	Asphalt	68	483	182	3,832	62	64	60	Mod	Good	27	11	**62**
22760	1ST ST	E YAKIMA AVE	DS@186S E YAKIMA AVE	Truck Route	Asphalt	65	186	67	1411	71	49	60	Mod	Good	20	9	**62.5**
23950	1ST ST	DS@186S E YAKIMA AVE	E CHESTNUT AVE	Truck Route	Asphalt	67	299	111	2,337	59	75	60	Mod	Good	30	11	**63**
26640	1ST ST	E CHESTNUT AVE	E WALNUT ST	Truck Route	Asphalt	67	484	180	3,783	52	63	60	Mod	Fair	34	14	**54**
28790	1ST ST	E WALNUT ST	E SPRUCE ST	Truck Route	Asphalt	65	477	172	3,617	59	58	60	Mod	Fair	25	16	**57**
30890	1ST ST	E SPRUCE ST	E PINE ST	Truck Route	Asphalt	58	484	156	3,275	52	66	60	Mod	Fair	31	17	**55**
33750	1ST ST	E PINE ST	E MAPLE ST	Truck Route	Asphalt	58	477	154	3,228	50	71	60	Mod	Fair	34	16	**56**
35310	1ST ST	E MAPLE ST	E BEECH ST	Truck Route	Asphalt	57	484	153	3,219	55	71	60	Mod	Good	28	17	**59**
37330	1ST ST	E BEECH ST	E RACE ST	Truck Route	Asphalt	60	479	160	3,353	50	66	60	Mod	Fair	30	21	**54**
39360	1ST ST	E RACE ST	PACIFIC AVE	Truck Route	Asphalt	63	394	138	2,896	59	75	60	Mod	Good	26	16	**63**
41490	1ST ST	PACIFIC AVE	DS@657S PACIFIC AVE	Truck Route	Asphalt	70	657	256	5,366	42	75	60	Mod	Fair	30	28	**52**
43130	1ST ST	DS@657S PACIFIC AVE	DS@1075S PACIFIC AVE	Truck Route	Asphalt	58	418	135	2828	55	66	60	Mod	Fair	29	16	**57.1**
45110	1ST ST	DS@1075S PACIFIC AVE	E ARLINGTON ST	Truck Route	Asphalt	59	401	131	2760	56	82	60	Mod	Good	28	17	**63.2**
47150	1ST ST	E ARLINGTON ST	DS@807S E ARLINGTON ST	Truck Route	Asphalt	63	807	282	5931	36	76	60	Mod	Marginal	33	31	**48.2**
47630	1ST ST	DS@807S E ARLINGTON ST	E NOB HILL BLVD	Truck Route	Asphalt	64	322	114	2,404	42	62	60	Mod	Marginal	30	28	**47**
49230	1ST ST	E NOB HILL BLVD	RANCH RITE RD	Truck Route	Asphalt	55	308	94	1,976	60	68	80	Strng	Good	9	31	**62**
49850	1ST ST	RANCH RITE RD	DS@352S RANCH RITE RD	Truck Route	Asphalt	59	352	115	2,423	65	88	60	Mod	V Good	8	27	**72**
50250	1ST ST	DS@352S RANCH RITE RD	DS@653S RANCH RITE RD	Truck Route	Asphalt	59	301	99	2,072	65	93	60	Mod	V Good	5	30	**73**
51530	1ST ST	DS@653S RANCH RITE RD	S 6TH ST	Truck Route	Asphalt	59	388	127	2,671	60	91	60	Mod	V Good	10	30	**70**
52980	1ST ST	S 6TH ST	E VIOLA AVE	Truck Route	Asphalt	59	465	152	3,201	63	87	60	Mod	V Good	5	33	**70**
54140	1ST ST	E VIOLA AVE	TENNANT LN	Truck Route	Asphalt	61	490	166	3487	64	91	60	Mod	V Good	7	30	**71.9**
54980	1ST ST	TENNANT LN	DS@219S TENNANT LN	Truck Route	Asphalt	59	219	72	1,507	69	86	60	Mod	V Good	5	26	**74**
55260	1ST ST	DS@219S TENNANT LN	LINDY LN	Truck Route	Asphalt	60	242	81	1,694	65	91	60	Mod	V Good	8	27	**73**
56570	1ST ST	LINDY LN	E MEAD AVE	Truck Route	Asphalt	58	477	154	3,228	64	86	60	Mod	V Good	10	26	**70**
58070	1ST ST	E MEAD AVE	E KING ST	Truck Route	Asphalt	75	777	324	6,799	41	59	60	Mod	Marginal	34	25	**46**
58590	1ST ST	E KING ST	DS@413S E KING ST	Truck Route	Asphalt	61	413	140	2,939	50	80	60	Mod	Fair	24	26	**59**
59380	1ST ST	DS@413S E KING ST	DS@873S E KING ST	Truck Route	Asphalt	63	459	161	3374	47	74	60	Mod	Fair	25	28	**54.9**
60070	1ST ST	DS@873S E KING ST	RUSSELL LN	Truck Route	Asphalt	62	524	180	3,790	48	74	60	Mod	Fair	25	26	**56**
60430	1ST ST	RUSSELL LN	DS@359S RUSSELL LN	Truck Route	Asphalt	66	359	132	2764	53	78	60	Mod	Good	22	25	**60.4**
61210	1ST ST	DS@359S RUSSELL LN	E WASHINGTON AVE	Truck Route	Asphalt	75	344	143	3,010	67	74	60	Mod	Good	12	22	**68**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
61550	1ST ST	E WASHINGTON AVE	DS@396S E WASHINGTON AVE	Truck Route	Asphalt	61	396	134	2,818	66	66	60	Mod	Good	19	16	**65**
62440	1ST ST	DS@396S E WASHINGTON AVE	DS@1401S E WASHINGTON AVE	Truck Route	Asphalt	61	1,005	341	7,152	56	69	60	Mod	Good	22	19	**59**
62870	1ST ST	DS@1401S E WASHINGTON AVE	DS@2009S E WASHINGTON AVE	Truck Route	Asphalt	62	608	209	4,398	57	68	60	Mod	Good	25	18	**60**
7560	20TH AVE	FRUITVALE BLVD	W J ST	Local	Asphalt	40	979	218	4,569	49	45	80	Strng	Marginal	27	24	**47**
5250	20TH AVE	W J ST	DS@299N W J ST	Local	Asphalt	28	299	47	977	59	49	80	Strng	Fair	19	23	**54**
4940	20TH AVE	DS@299N W J ST	DS@701N W J ST	Local	Asphalt	30	402	67	1,407	12	47	80	Strng	V Poor	49	33	**23**
4430	20TH AVE	DS@701N W J ST	RIVER RD	Local	Asphalt	37	288	59	1,243	22	44	80	Strng	Poor	45	33	**28**
14470	20TH AVE	ENGLEWOOD AVE	JEROME AVE	Local	Asphalt	41	670	153	3205	72	70	60	Mod	V Good	9	19	**70.4**
11810	20TH AVE	JEROME AVE	SWAN AVE	Local	Asphalt	24	335	45	938	69	61	60	Mod	Good	13	18	**65**
10670	20TH AVE	SWAN AVE	WILLOW ST	Local	Asphalt	23	331	42	888	67	74	60	Mod	Good	18	15	**69**
9740	20TH AVE	WILLOW ST	FRUITVALE BLVD	Local	Asphalt	23	676	86	1,814	62	43	60	Mod	Fair	21	17	**54**
20480	20TH AVE	W LINCOLN AVE	DS@199N W LINCOLN AVE	Local	Asphalt	29	199	32	673	66	63	60	Mod	Good	21	13	**64**
19160	20TH AVE	DS@199N W LINCOLN AVE	MCKINLEY AVE	Local	Asphalt	26	467	67	1,417	54	72	60	Mod	Good	22	24	**59**
17000	20TH AVE	MCKINLEY AVE	ROOSEVELT AVE	Local	Asphalt	36	298	60	1252	59	66	60	Mod	Good	17	24	**60.1**
16050	20TH AVE	ROOSEVELT AVE	DS@153N ROOSEVELT AVE	Local	Asphalt	28	153	24	500	59	78	60	Mod	Good	19	22	**64**
15140	20TH AVE	DS@153N ROOSEVELT AVE	ENGLEWOOD AVE	Local	Asphalt	27	197	30	621	63	63	80	Strng	Good	11	26	**62**
41560	20TH AVE	TIETON DR	MACLAREN ST	Local	Asphalt	30	665	111	2328	52	63	60	Mod	Fair	23	25	**54.3**
43510	20TH AVE	MACLAREN ST	SAINT HELENS ST	Local	Asphalt	18	389	39	817	44	42	80	Strng	Marginal	28	28	**42**
44500	20TH AVE	SAINT HELENS ST	LOMBARD LN	Local	Asphalt	18	277	28	582	50	39	80	Strng	Marginal	24	26	**45.3**
46390	20TH AVE	NORTH END	BONNIE DOONE AVE	Local	Asphalt	23	420	54	1127	75	55	60	Mod	Good	7	17	**67.3**
48620	20TH AVE	BONNIE DOONE AVE	W NOB HILL BLVD	Local	Asphalt	21	664	77	1,627	68	43	80	Strng	Fair	13	19	**59**
50260	20TH AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	24	647	86	1812	73	52	60	Mod	Good	9	18	**65**
50800	20TH AVE	W PRASCH AVE	W PRASCH AVE	Local	Asphalt	23	59	8	158	64	36	80	Strng	Fair	9	27	**54**
51510	20TH AVE	W PRASCH AVE	GRANT ST	Local	Asphalt	23	317	41	851	67	41	80	Strng	Fair	4	29	**57**
52400	20TH AVE	GRANT ST	W VIOLA AVE	Local	Asphalt	22	297	36	762	72	50	80	Strng	Good	8	20	**64**
53510	20TH AVE	W VIOLA AVE	GREENWAY ST	Local	Asphalt	28	217	34	709	70	47	80	Strng	Good	8	22	**62**
54450	20TH AVE	GREENWAY ST	W LOGAN AVE	Local	Asphalt	20	442	49	1031	65	38	80	Strng	Fair	12	23	**55.2**
55240	20TH AVE	W LOGAN AVE	PLATH AVE	Local	Asphalt	25	320	44	933	60	27	80	Strng	Marginal	15	25	**47.9**
55920	20TH AVE	PLATH AVE	W MEAD AVE	Local	Asphalt	20	330	37	770	45	7	80	Strng	Poor	16	32	**31.4**
55190	20TH ST	SIMPSON LN	DS@478S SIMPSON LN	Local	Asphalt	32	478	85	1785	92	77	60	Mod	Excellent	5	3	**86.4**
55450	20TH ST	DS@478S SIMPSON LN	DS@684S SIMPSON LN	Local	Asphalt	23	207	26	555	97	89	60	Mod	Excellent	0	3	**93**
56780	20TH ST	DS@684S SIMPSON LN	E MEAD AVE	Local	Asphalt	26	331	48	1004	91	71	60	Mod	V Good	6	4	**83.5**
7540	21ST AVE	FRUITVALE BLVD	W J ST	Local	Asphalt	37	978	201	4222	75	66	60	Mod	V Good	3	22	**71.3**
16970	21ST AVE	SOUTH END	ENGLEWOOD AVE	Local	Asphalt	35	646	126	2,638	83	64	60	Mod	V Good	6	11	**76**
26390	21ST AVE	SUMMITVIEW AVE	BROWNE AVE	Local	Asphalt	25	348	48	1,015	73	51	80	Strng	Good	3	24	**65**
24120	21ST AVE	BROWNE AVE	DS@192N BROWNE AVE	Local	Asphalt	23	192	25	515	60	37	80	Strng	Fair	15	25	**51**
23600	21ST AVE	DS@192N BROWNE AVE	NORTH END	Local	Asphalt	24	413	55	1,156	60	35	80	Strng	Fair	16	24	**51**
41520	21ST AVE	TIETON DR	MACLAREN ST	Local	Asphalt	23	663	85	1,779	33	30	80	Strng	Poor	39	28	**31**
46360	21ST AVE	NORTH END	BONNIE DOONE AVE	Local	Asphalt	22	471	58	1,209	40	12	80	Strng	Poor	23	37	**29**
48580	21ST AVE	BONNIE DOONE AVE	W NOB HILL BLVD	Local	Asphalt	22	654	80	1,679	32	12	80	Strng	Poor	32	35	**25**
50290	21ST AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	31	662	114	2394	78	58	60	Mod	V Good	4	18	**70.2**
52380	21ST AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	30	669	112	2,342	70	46	80	Strng	Good	10	20	**61**
54430	21ST AVE	W VIOLA AVE	W LOGAN AVE	Local	Asphalt	31	658	113	2380	49	22	80	Strng	Marginal	17	34	**39.3**
55230	21ST AVE	W LOGAN AVE	SOUTH END	Local	Asphalt	31	304	52	1099	64	36	80	Strng	Fair	17	19	**54.1**
65470	21ST AVE	OAK AVE	AHTANUM RD	Local	Asphalt	35	521	101	2,127	65	57	80	Strng	Good	12	23	**62**
4720	22ND AVE	SOUTH END	RIVER RD	Local	Asphalt	30	638	106	2233	32	53	60	Mod	Poor	37	18	**37.5**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
17100	22ND AVE	MCKINLEY AVE	ENGLEWOOD AVE	Local	Asphalt	25	667	93	1945	75	64	60	Mod	V Good	14	12	**70.2**
26360	22ND AVE	SUMMITVIEW AVE	DS@645N SUMMITVIEW AVE	Local	Asphalt	21	645	75	1580	72	50	80	Strng	Good	7	20	**64.2**
23210	22ND AVE	DS@645N SUMMITVIEW AVE	NORTH END	Local	Asphalt	21	375	44	919	80	61	60	Mod	V Good	3	16	**73**
31260	22ND AVE	W YAKIMA AVE	DS@165N W YAKIMA AVE	Local	Asphalt	25	165	23	481	68	43	60	Mod	Fair	19	13	**58**
30300	22ND AVE	DS@165N W YAKIMA AVE	BARGE ST	Local	Asphalt	24	162	22	454	63	58	80	Strng	Good	9	28	**60**
29630	22ND AVE	BARGE ST	ELEANOR ST	Local	Asphalt	24	325	43	910	64	48	80	Strng	Fair	6	31	**57**
28060	22ND AVE	ELEANOR ST	DS@165N ELEANOR ST	Local	Asphalt	24	165	22	462	65	50	80	Strng	Fair	1	35	**59**
27140	22ND AVE	DS@165N ELEANOR ST	SUMMITVIEW AVE	Local	Asphalt	23	179	23	480	57	36	80	Strng	Marginal	13	31	**49**
33320	22ND AVE	N 22ND AVE	W CHESTNUT AVE	Local	Asphalt	21	332	39	813	51	34	80	Strng	Marginal	10	29	**44**
41500	22ND AVE	TIETON DR	MACLAREN ST	Local	Asphalt	23	665	85	1,784	66	39	80	Strng	Fair	17	17	**56**
42240	22ND AVE	MACLAREN ST	TAH-KIN RD	Local	Asphalt	23	153	20	411	72	50	60	Mod	Good	15	13	**63**
42650	22ND AVE	TAH-KIN RD	SAINT HELENS ST	Local	Asphalt	22	178	22	457	78	59	60	Mod	V Good	9	13	**71**
43480	22ND AVE	SAINT HELENS ST	SAINT HELENS ST	Local	Asphalt	22	64	8	164	41	11	80	Strng	Poor	27	33	**30**
44520	22ND AVE	SAINT HELENS ST	DS@284S SAINT HELENS ST	Local	Asphalt	23	284	36	762	36	9	80	Strng	Poor	33	31	**26**
46330	22ND AVE	DS@284S SAINT HELENS ST	BONNIE DOONE AVE	Local	Asphalt	29	650	105	2,199	50	11	80	Strng	Poor	29	21	**36**
48560	22ND AVE	BONNIE DOONE AVE	W NOB HILL BLVD	Local	Asphalt	21	652	76	1,597	70	46	80	Strng	Good	10	20	**61**
50270	22ND AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	30	667	111	2,335	57	21	80	Strng	Marginal	17	25	**44**
52330	22ND AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	31	661	114	2,391	79	59	60	Mod	V Good	4	17	**71**
53440	22ND AVE	W VIOLA AVE	LILA AVE	Local	Asphalt	32	214	38	799	42	27	80	Strng	Poor	25	33	**36**
54370	22ND AVE	LILA AVE	W LOGAN AVE	Local	Asphalt	32	446	79	1665	48	21	80	Strng	Poor	17	35	**38.1**
55220	22ND AVE	W LOGAN AVE	SOUTH END	Local	Asphalt	25	317	44	925	84	65	60	Mod	V Good	12	5	**76.8**
53260	22ND ST	S 24TH ST	E VIOLA AVE	Local	Asphalt	27	466	70	1468	33	49	60	Mod	Poor	38	29	**37.2**
4740	23RD AVE	SOUTH END	RIVER RD	Local	Asphalt	42	647	151	3,170	76	56	60	Mod	Good	7	17	**68**
5210	23RD AVE	W J ST	NORTH END	Local	Asphalt	34	261	49	1,035	75	56	80	Strng	Good	4	21	**68**
20420	23RD AVE	W LINCOLN AVE	MCKINLEY AVE	Local	Asphalt	32	649	115	2,423	74	53	60	Mod	Good	15	12	**66**
17090	23RD AVE	MCKINLEY AVE	ENGLEWOOD AVE	Local	Asphalt	32	665	118	2,483	77	58	60	Mod	V Good	9	14	**70**
26330	23RD AVE	SUMMITVIEW AVE	DS@191N SUMMITVIEW AVE	Local	Concrete	23	191	24	513	27	36	60	Mod	Poor	0	0	**29**
24720	23RD AVE	DS@191N SUMMITVIEW AVE	DS@692N SUMMITVIEW AVE	Local	Concrete	24	501	67	1403	32	40	60	Mod	Poor	0	0	**33.7**
22750	23RD AVE	DS@692N SUMMITVIEW AVE	NORTH END	Local	Concrete	25	511	71	1490	39	39	60	Mod	Poor	0	0	**38.7**
31230	23RD AVE	W YAKIMA AVE	DS@167N W YAKIMA AVE	Local	Asphalt	24	167	22	468	56	49	80	Strng	Fair	20	23	**53**
30280	23RD AVE	DS@167N W YAKIMA AVE	BARGE ST	Local	Asphalt	27	161	24	507	85	66	60	Mod	V Good	3	13	**78**
29580	23RD AVE	BARGE ST	DS@165N BARGE ST	Local	Asphalt	24	165	22	462	74	59	60	Mod	Good	9	17	**68**
28760	23RD AVE	DS@165N BARGE ST	ELEANOR ST	Local	Asphalt	24	162	22	454	86	67	60	Mod	V Good	0	14	**79**
27980	23RD AVE	ELEANOR ST	DS@163N ELEANOR ST	Local	Asphalt	23	163	21	437	86	73	60	Mod	V Good	0	14	**81**
27090	23RD AVE	DS@163N ELEANOR ST	SUMMITVIEW AVE	Local	Asphalt	23	171	22	459	70	46	80	Strng	Good	10	20	**61**
31980	23RD AVE	N 23RD AVE	DS@164S N 23RD AVE	Local	Asphalt	23	164	21	440	79	60	80	Strng	V Good	0	21	**72**
33290	23RD AVE	DS@164S N 23RD AVE	W CHESTNUT AVE	Local	Asphalt	23	168	21	451	77	57	80	Strng	V Good	1	22	**70**
35970	23RD AVE	UNKNOWN - 34720	UNKNOWN - 36100	Local	Asphalt	18	213	21	447	45	12	80	Strng	Poor	29	26	**33**
36730	23RD AVE	UNKNOWN - 36100	STANLEY BLVD	Local	Asphalt	19	233	25	516	25	16	80	Strng	V Poor	45	30	**20.9**
38760	23RD AVE	STANLEY BLVD	TIETON DR	Local	Asphalt	30	443	74	1,551	72	50	80	Strng	Good	7	22	**64**
41460	23RD AVE	TIETON DR	MACLAREN ST	Local	Asphalt	30	674	112	2,359	34	35	80	Strng	Poor	35	31	**33**
46310	23RD AVE	NORTH END	BONNIE DOONE AVE	Local	Asphalt	23	645	82	1,731	47	51	80	Strng	Marginal	22	31	**47**
48540	23RD AVE	BONNIE DOONE AVE	W NOB HILL BLVD	Local	Asphalt	21	652	76	1,597	58	54	60	Mod	Fair	25	17	**56**
54300	23RD AVE	NORTH END	W LOGAN AVE	Local	Asphalt	37	290	59	1,243	52	22	80	Strng	Marginal	17	31	**41**
75660	23RD AVE	OAK AVE	AHTANUM RD	Local	Asphalt	35	525	102	2,144	89	69	60	Mod	V Good	0	11	**82**
7940	24TH AVE	CASTLEVALE RD	FRUITVALE BLVD	Minor Arterial	Asphalt	34	182	34	722	66	40	80	Strng	Fair	10	24	**56**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
11770	24TH AVE	JEROME AVE	DS@207N JEROME AVE	Local	Asphalt	27	207	31	652	87	68	60	Mod	V Good	5	8	**80.1**
11140	24TH AVE	DS@207N JEROME AVE	WILLOW ST	Local	Asphalt	32	456	81	1702	85	66	60	Mod	V Good	6	10	**77.5**
9780	24TH AVE	WILLOW ST	CASTLEVALE RD	Local	Asphalt	37	663	136	2862	100	90	60	Mod	Excellent	0	0	**95.6**
19130	24TH AVE	POWERHOUSE RD	DS@377N POWERHOUSE RD	Local	Asphalt	30	377	63	1320	73	52	60	Mod	Good	14	12	**65**
17400	24TH AVE	DS@377N POWERHOUSE RD	ENGLEWOOD AVE	Local	Asphalt	32	725	129	2707	80	61	60	Mod	V Good	4	16	**72.7**
20400	24TH AVE	W LINCOLN AVE	POWERHOUSE RD	Major Collector	Asphalt	32	216	38	806	75	55	60	Mod	Good	12	13	**67.6**
26260	24TH AVE	SUMMITVIEW AVE	DS@714N SUMMITVIEW AVE	Local	Asphalt	21	714	83	1749	75	54	60	Mod	Good	9	17	**66.9**
22720	24TH AVE	DS@714N SUMMITVIEW AVE	W LINCOLN AVE	Local	Asphalt	21	610	71	1495	48	42	80	Strng	Marginal	15	16	**44.7**
31190	24TH AVE	W YAKIMA AVE	DS@165N W YAKIMA AVE	Local	Asphalt	24	165	22	462	46	30	80	Strng	Marginal	23	31	**39.6**
30260	24TH AVE	DS@165N W YAKIMA AVE	BARGE ST	Local	Asphalt	26	166	24	504	63	65	80	Strng	Good	11	26	**62.7**
29550	24TH AVE	BARGE ST	DS@158N BARGE ST	Local	Asphalt	25	158	22	461	59	34	80	Strng	Fair	7	34	**50**
28770	24TH AVE	DS@158N BARGE ST	ELEANOR ST	Local	Asphalt	23	166	21	445	64	60	80	Strng	Good	11	25	**62**
27960	24TH AVE	ELEANOR ST	DS@166N ELEANOR ST	Local	Asphalt	23	166	21	445	42	46	80	Strng	Marginal	23	35	**42**
27080	24TH AVE	DS@166N ELEANOR ST	SUMMITVIEW AVE	Local	Asphalt	25	166	23	484	36	32	80	Strng	Poor	28	36	**34**
31990	24TH AVE	N 24TH AVE	DS@169S N 24TH AVE	Local	Asphalt	23	169	22	453	47	60	60	Mod	Fair	25	28	**50**
33160	24TH AVE	DS@169S N 24TH AVE	W CHESTNUT AVE	Local	Asphalt	23	161	21	432	47	35	80	Strng	Marginal	18	35	**42**
36130	24TH AVE	W CHESTNUT AVE	DS@666S W CHESTNUT AVE	Local	Asphalt	24	666	89	1,865	57	59	80	Strng	Fair	9	34	**57**
38740	24TH AVE	DS@666S W CHESTNUT AVE	TIETON DR	Local	Asphalt	22	665	81	1707	55	49	80	Strng	Fair	10	35	**51.8**
41430	24TH AVE	TIETON DR	MACLAREN ST	Local	Concrete	29	652	105	2206	73	52	60	Mod	Good	0	0	**65.2**
43080	24TH AVE	MACLAREN ST	SAINT HELENS ST	Local	Asphalt	27	397	60	1,251	55	38	80	Strng	Marginal	25	20	**48**
44470	24TH AVE	SAINT HELENS ST	DS@286S SAINT HELENS ST	Local	Asphalt	26	286	41	868	31	34	80	Strng	Poor	37	32	**31**
46280	24TH AVE	DS@286S SAINT HELENS ST	BONNIE DOONE AVE	Local	Asphalt	28	657	102	2,146	31	33	80	Strng	Poor	38	31	**31**
48520	24TH AVE	BONNIE DOONE AVE	W NOB HILL BLVD	Local	Asphalt	27	658	99	2073	37	33	80	Strng	Poor	37	22	**34.2**
51260	24TH AVE	W NOB HILL BLVD	CLINTON WY	Major Collector	Asphalt	44	847	207	4348	85	72	60	Mod	V Good	7	8	**80.1**
52170	24TH AVE	CLINTON WY	W VIOLA AVE	Major Collector	Asphalt	46	462	118	2479	92	87	60	Mod	Excellent	0	8	**89.6**
53490	24TH AVE	W VIOLA AVE	LILA AVE	Major Collector	Asphalt	45	250	63	1313	89	84	60	Mod	Excellent	0	11	**86.8**
54280	24TH AVE	LILA AVE	W LOGAN AVE	Major Collector	Asphalt	48	428	114	2397	88	69	60	Mod	V Good	3	8	**81.2**
55900	24TH AVE	W LOGAN AVE	W MEAD AVE	Major Collector	Asphalt	47	663	173	3635	91	88	60	Mod	Excellent	0	9	**89.2**
57840	24TH AVE	W MEAD AVE	DS@719S W MEAD AVE	Major Collector	Asphalt	48	719	192	4,026	87	89	60	Mod	Excellent	5	8	**87**
58640	24TH AVE	DS@719S W MEAD AVE	RACQUET LN	Major Collector	Asphalt	47	593	155	3252	89	95	60	Mod	Excellent	3	7	**90.3**
59610	24TH AVE	RACQUET LN	DS@506S RACQUET LN	Major Collector	Asphalt	45	506	127	2657	93	83	60	Mod	Excellent	0	7	**88.6**
60490	24TH AVE	DS@506S RACQUET LN	W WASHINGTON AVE	Major Collector	Asphalt	47	665	174	3646	85	66	60	Mod	V Good	3	12	**77.6**
72050	24TH ST	W BIRCHFIELD RD	S 22ND ST	Local	Asphalt	29	1,722	277	5,826	69	73	60	Mod	V Good	7	25	**69**
4570	25TH AVE	SOUTH END	RIVER RD	Local	Asphalt	33	450	83	1733	52	10	80	Strng	Poor	24	24	**37.2**
14230	25TH AVE	ENGLEWOOD AVE	FAIRBANKS AVE	Major Collector	Asphalt	29	354	57	1,198	64	36	80	Strng	Fair	17	19	**53**
12820	25TH AVE	FAIRBANKS AVE	JEROME AVE	Major Collector	Asphalt	30	310	52	1085	72	50	60	Mod	Good	12	15	**64**
11750	25TH AVE	JEROME AVE	WILLOW ST	Major Collector	Asphalt	35	663	129	2,707	67	41	60	Mod	Fair	17	16	**57**
9760	25TH AVE	WILLOW ST	CASTLEVALE RD	Major Collector	Asphalt	25	662	92	1,931	53	32	80	Strng	Marginal	26	21	**44**
18490	25TH AVE	POWERHOUSE RD	DS@225N POWERHOUSE RD	Local	Asphalt	33	225	41	866	100	90	60	Mod	Excellent	0	0	**96**
17390	25TH AVE	DS@225N POWERHOUSE RD	DS@295N POWERHOUSE RD	Local	Asphalt	32	70	12	261	81	62	80	Strng	V Good	0	19	**74.1**
16990	25TH AVE	DS@295N POWERHOUSE RD	ENGLEWOOD AVE	Local	Asphalt	32	654	116	2,442	85	66	60	Mod	V Good	4	12	**78**
26190	25TH AVE	SUMMITVIEW AVE	DS@673N SUMMITVIEW AVE	Local	Concrete	25	673	93	1,963	36	43	60	Mod	Poor	0	0	**38**
22790	25TH AVE	DS@673N SUMMITVIEW AVE	W LINCOLN AVE	Local	Concrete	22	648	79	1663	51	39	60	Mod	Marginal	0	0	**46.4**
29520	25TH AVE	BARGE ST	SUMMITVIEW AVE	Local	Concrete	25	659	92	1922	40	41	60	Mod	Marginal	0	0	**39.6**
34500	25TH AVE	W CHESTNUT AVE	DS@351S W CHESTNUT AVE	Local	Asphalt	22	351	43	901	39	48	60	Mod	Marginal	37	23	**41**
36200	25TH AVE	DS@351S W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	23	313	40	840	34	48	60	Mod	Poor	39	26	**38**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
38710	25TH AVE	W WALNUT ST	TIETON DR	Local	Asphalt	23	648	83	1,739	62	48	80	Strng	Fair	14	24	**56**
41440	25TH AVE	TIETON DR	DS@661S TIETON DR	Local	Concrete	24	661	88	1,851	35	37	60	Mod	Poor	0	0	**35**
42530	25TH AVE	DS@661S TIETON DR	SAINT HELENS ST	Local	Composite	22	335	41	860	64	52	60	Mod	Good	15	21	**59**
44440	25TH AVE	SAINT HELENS ST	DS@337S SAINT HELENS ST	Local	Asphalt	22	337	41	865	66	53	80	Strng	Good	8	26	**61**
46230	25TH AVE	DS@337S SAINT HELENS ST	BONNIE DOONE AVE	Local	Asphalt	23	661	84	1774	75	55	60	Mod	Good	11	14	**67.1**
48390	25TH AVE	BONNIE DOONE AVE	W NOB HILL BLVD	Local	Asphalt	23	657	84	1763	72	51	60	Mod	Good	13	15	**63.5**
53420	25TH AVE	W VIOLA AVE	LILA AVE	Local	Asphalt	29	418	67	1,414	66	53	80	Strng	Good	7	27	**61**
54390	25TH AVE	NORTH END	W LOGAN AVE	Local	Asphalt	37	189	39	823	70	47	80	Strng	Good	3	27	**61.4**
55860	25TH AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	29	642	103	2172	41	48	80	Strng	Marginal	24	35	**42.6**
56920	25TH AVE	W MEAD AVE	SOUTH END	Local	Asphalt	28	221	34	722	51	43	80	Strng	Marginal	22	27	**46.7**
4690	26TH AVE	SOUTH END	RIVER RD	Local	Asphalt	29	626	101	2118	26	43	80	Strng	Poor	35	25	**31.1**
72480	26TH AVE	FRUITVALE BLVD	W J ST	Local	Asphalt	32	410	73	1531	52	38	80	Strng	Marginal	23	26	**46.1**
9820	26TH AVE	WILLOW ST	NORTH END	Local	Asphalt	24	444	59	1,243	80	60	60	Mod	V Good	5	16	**72**
14210	26TH AVE	ENGLEWOOD AVE	FAIRBANKS AVE	Local	Asphalt	26	354	51	1,074	76	56	80	Strng	Good	5	19	**69**
12800	26TH AVE	FAIRBANKS AVE	JEROME AVE	Local	Asphalt	36	273	55	1147	77	58	80	Strng	V Good	0	23	**70**
17780	26TH AVE	POWERHOUSE RD	DS@212N POWERHOUSE RD	Local	Asphalt	30	212	35	742	82	63	60	Mod	V Good	4	14	**75**
16880	26TH AVE	DS@212N POWERHOUSE RD	WALLY LN	Local	Asphalt	31	230	40	832	84	65	60	Mod	V Good	0	16	**77**
16150	26TH AVE	WALLY LN	ENGLEWOOD AVE	Local	Asphalt	32	402	71	1,501	81	62	60	Mod	V Good	4	15	**74**
26160	26TH AVE	SUMMITVIEW AVE	DS@658N SUMMITVIEW AVE	Local	Asphalt	24	658	88	1,842	77	66	60	Mod	V Good	10	13	**72**
22840	26TH AVE	DS@658N SUMMITVIEW AVE	W LINCOLN AVE	Local	Asphalt	25	661	92	1,928	70	64	60	Mod	Good	13	17	**67**
31000	26TH AVE	W YAKIMA AVE	DS@128N W YAKIMA AVE	Local	Asphalt	23	128	16	343	80	83	60	Mod	V Good	6	14	**80**
30450	26TH AVE	DS@128N W YAKIMA AVE	BARGE ST	Local	Asphalt	25	200	28	583	78	59	60	Mod	V Good	5	17	**71.1**
29470	26TH AVE	BARGE ST	SUMMITVIEW AVE	Local	Asphalt	24	660	88	1,848	61	41	80	Strng	Fair	17	22	**53**
33110	26TH AVE	N 26TH AVE	W CHESTNUT AVE	Local	Asphalt	24	329	44	921	36	48	80	Strng	Poor	35	29	**39**
34470	26TH AVE	W CHESTNUT AVE	DS@355S W CHESTNUT AVE	Local	Asphalt	22	355	43	911	65	37	80	Strng	Fair	17	19	**54**
36030	26TH AVE	DS@355S W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	21	298	35	730	56	48	60	Mod	Fair	25	19	**52**
38680	26TH AVE	W WALNUT ST	TIETON DR	Local	Asphalt	22	660	81	1,694	58	47	80	Strng	Fair	18	24	**54**
41480	26TH AVE	TIETON DR	DS@674S TIETON DR	Local	Asphalt	31	674	116	2,438	68	46	80	Strng	Good	11	21	**60**
42600	26TH AVE	DS@674S TIETON DR	DS@1017S TIETON DR	Local	Asphalt	29	343	55	1,160	67	60	60	Mod	Good	15	17	**64**
44390	26TH AVE	DS@1017S TIETON DR	W ARLINGTON ST	Local	Asphalt	30	312	52	1092	77	70	60	Mod	V Good	1	22	**74.1**
46210	26TH AVE	W ARLINGTON ST	BONNIE DOONE AVE	Local	Asphalt	31	664	114	2401	72	77	60	Mod	V Good	7	21	**73.1**
48330	26TH AVE	BONNIE DOONE AVE	W NOB HILL BLVD	Local	Asphalt	29	657	106	2223	67	51	60	Mod	Good	20	13	**60.4**
53360	26TH AVE	W VIOLA AVE	LILA AVE	Local	Asphalt	29	425	68	1,438	69	51	80	Strng	Good	5	26	**62**
54360	26TH AVE	NORTH END	W LOGAN AVE	Local	Asphalt	36	191	38	808	56	45	80	Strng	Fair	13	31	**51.2**
55810	26TH AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	30	639	107	2237	70	66	80	Strng	Good	5	25	**68**
56930	26TH AVE	W MEAD AVE	LOREN CT	Local	Asphalt	29	305	49	1032	82	65	60	Mod	V Good	4	15	**75.4**
57150	26TH AVE	LOREN CT	W KING CT	Local	Asphalt	27	190	29	599	84	65	60	Mod	V Good	4	12	**77**
57370	26TH AVE	W KING CT	SOUTH END	Local	Asphalt	27	84	13	265	76	56	60	Mod	Good	8	16	**69**
64330	26TH AVE	AIRPORT LN	DS@294S AIRPORT LN	Local	Asphalt	34	294	56	1,166	75	76	60	Mod	V Good	6	19	**74**
65580	26TH AVE	DS@294S AIRPORT LN	AHTANUM RD	Local	Asphalt	35	797	155	3,254	70	74	60	Mod	V Good	9	21	**70**
4730	27TH AVE	SOUTH END	RIVER RD	Local	Asphalt	27	345	52	1,087	66	39	80	Strng	Fair	13	21	**56**
12190	27TH AVE	JEROME AVE	SWAN AVE	Local	Asphalt	38	398	84	1,764	82	76	60	Mod	V Good	0	18	**79**
10580	27TH AVE	SWAN AVE	DS@180N SWAN AVE	Local	Asphalt	26	180	26	546	83	75	60	Mod	V Good	0	17	**80**
10190	27TH AVE	DS@180N SWAN AVE	WILLOW ST	Local	Asphalt	26	150	22	455	83	65	60	Mod	V Good	0	17	**76.4**
9680	27TH AVE	WILLOW ST	GARRETT ST	Local	Asphalt	31	305	53	1,103	73	51	80	Strng	Good	4	23	**65**
16120	27TH AVE	WALLY LN	ENGLEWOOD AVE	Local	Asphalt	24	403	54	1128	83	64	60	Mod	V Good	3	14	**75.7**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
26080	27TH AVE	SUMMITVIEW AVE	DS@754N SUMMITVIEW AVE	Local	Asphalt	31	754	130	2,727	70	49	80	Strng	Good	7	23	**63**
22570	27TH AVE	DS@754N SUMMITVIEW AVE	W LINCOLN AVE	Local	Asphalt	32	564	100	2,106	77	61	80	Strng	V Good	0	23	**71**
29410	27TH AVE	BARGE ST	DS@254N BARGE ST	Local	Asphalt	31	254	44	919	65	46	80	Strng	Fair	12	22	**58**
28220	27TH AVE	DS@254N BARGE ST	NORTH END	Local	Asphalt	31	218	38	788	48	45	80	Strng	Marginal	27	25	**46**
38540	27TH AVE	W WALNUT ST	TIETON DR	Local	Asphalt	22	657	80	1,686	57	46	80	Strng	Fair	21	22	**52**
40240	27TH AVE	TIETON DR	SHELTON AVE	Local	Asphalt	30	367	61	1,285	76	56	80	Strng	Good	5	19	**69**
41210	27TH AVE	SHELTON AVE	BRACKETT AVE	Local	Asphalt	29	260	42	880	42	69	60	Mod	Fair	26	32	**50**
42370	27TH AVE	BRACKETT AVE	FRASER WY	Local	Asphalt	31	280	48	1,013	73	52	60	Mod	Good	13	15	**65**
44360	27TH AVE	FRASER WY	W ARLINGTON ST	Local	Asphalt	31	422	73	1,526	77	57	60	Mod	V Good	10	13	**69**
46180	27TH AVE	W ARLINGTON ST	BONNIE DOONE AVE	Local	Asphalt	30	663	111	2,321	72	59	60	Mod	Good	17	11	**66**
47250	27TH AVE	BONNIE DOONE AVE	SOUTH END	Local	Asphalt	29	305	49	1,032	70	46	80	Strng	Good	5	26	**61**
54470	27TH AVE	W LOGAN AVE	SOUTH END	Local	Asphalt	39	143	31	649	57	40	80	Strng	Fair	16	27	**50**
55760	27TH AVE	PLATH AVE	W MEAD AVE	Local	Asphalt	29	371	60	1,255	66	39	80	Strng	Fair	13	22	**56**
56880	27TH AVE	W MEAD AVE	LOREN CT	Local	Asphalt	29	272	44	920	58	64	80	Strng	Good	14	28	**59.3**
57220	27TH AVE	LOREN CT	W KING CT	Local	Asphalt	29	258	42	873	51	63	80	Strng	Fair	4	44	**54.3**
57420	27TH AVE	W KING CT	DS@132S W KING CT	Local	Asphalt	29	132	21	447	54	46	80	Strng	Fair	6	40	**50.3**
58010	27TH AVE	DS@132S W KING CT	TAHOMA AVE	Local	Asphalt	31	163	28	590	84	65	60	Mod	V Good	11	6	**76.6**
58340	27TH AVE	TAHOMA AVE	HOLLOW CREEK PL	Local	Asphalt	27	320	48	1,008	75	61	60	Mod	V Good	10	15	**69**
3810	28TH AVE	RIVER RD	NORTH END	Local	Asphalt	33	750	138	2,888	22	26	80	Strng	V Poor	41	37	**23**
7900	28TH AVE	CASTLEVALE RD	FRUITVALE BLVD	Local	Asphalt	24	970	129	2716	82	64	60	Mod	V Good	10	7	**75.4**
12290	28TH AVE	JEROME AVE	SWAN AVE	Local	Asphalt	34	427	81	1,694	81	78	60	Mod	V Good	0	19	**79**
10620	28TH AVE	SWAN AVE	WILLOW ST	Local	Asphalt	25	333	46	971	71	66	80	Strng	Good	3	25	**69**
26050	28TH AVE	SUMMITVIEW AVE	DS@677N SUMMITVIEW AVE	Local	Asphalt	30	677	113	2370	77	58	60	Mod	V Good	11	12	**69.8**
22740	28TH AVE	DS@677N SUMMITVIEW AVE	W LINCOLN AVE	Local	Asphalt	32	643	114	2,401	76	56	60	Mod	Good	6	18	**69**
30950	28TH AVE	W YAKIMA AVE	BARGE ST	Local	Asphalt	25	328	46	957	52	50	80	Strng	Fair	22	26	**50.6**
29350	28TH AVE	BARGE ST	CANTERBURY LN	Local	Asphalt	23	327	42	877	67	53	80	Strng	Good	10	23	**61.4**
27850	28TH AVE	CANTERBURY LN	DS@164N CANTERBURY LN	Local	Asphalt	24	164	22	459	70	77	60	Mod	V Good	9	22	**71.3**
27040	28TH AVE	DS@164N CANTERBURY LN	SUMMITVIEW AVE	Local	Asphalt	24	165	22	462	30	37	80	Strng	Poor	40	30	**31.1**
31560	28TH AVE	N 28TH AVE	DS@149S N 28TH AVE	Local	Concrete	23	149	19	400	42	41	60	Mod	Marginal	0	0	**41**
33000	28TH AVE	DS@149S N 28TH AVE	W CHESTNUT AVE	Local	Concrete	22	179	22	459	39	34	60	Mod	Poor	0	0	**36**
34410	28TH AVE	W CHESTNUT AVE	PALATINE AVE	Local	Concrete	20	362	40	845	40	45	60	Mod	Marginal	0	0	**41**
35980	28TH AVE	PALATINE AVE	W WALNUT ST	Local	Concrete	21	284	33	696	62	30	60	Mod	Fair	0	0	**50**
38460	28TH AVE	W WALNUT ST	TIETON DR	Local	Composite	37	644	132	2,780	59	50	80	Strng	Fair	16	25	**54**
44340	28TH AVE	FRASER WY	W ARLINGTON ST	Local	Asphalt	30	393	66	1,376	77	57	60	Mod	V Good	6	17	**69**
46160	28TH AVE	W ARLINGTON ST	BONNIE DOONE AVE	Local	Asphalt	29	664	107	2,247	49	64	80	Strng	Fair	14	37	**53**
48190	28TH AVE	BONNIE DOONE AVE	W NOB HILL BLVD	Local	Asphalt	21	666	78	1,632	33	43	80	Strng	Poor	34	28	**35**
49940	28TH AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	38	514	109	2,279	29	50	80	Strng	Poor	36	35	**35**
51210	28TH AVE	W PRASCH AVE	CLINTON WY	Local	Asphalt	38	349	74	1,547	26	44	80	Strng	Poor	42	32	**31**
52140	28TH AVE	CLINTON WY	W VIOLA AVE	Local	Asphalt	29	467	75	1,580	38	49	80	Strng	Marginal	26	36	**41**
54290	28TH AVE	W LOGAN AVE	SOUTH END	Local	Asphalt	39	129	28	594	65	42	80	Strng	Fair	12	23	**56**
55740	28TH AVE	PLATH AVE	W MEAD AVE	Local	Asphalt	29	369	59	1,248	60	49	80	Strng	Fair	13	27	**55**
56820	28TH AVE	W MEAD AVE	LOREN CT	Local	Asphalt	29	277	45	937	78	59	80	Strng	V Good	0	22	**71**
57190	28TH AVE	LOREN CT	W KING CT	Local	Asphalt	29	326	53	1,103	81	67	60	Mod	V Good	0	19	**75**
58100	28TH AVE	W KING CT	TAHOMA AVE	Local	Asphalt	29	332	53	1,123	78	67	60	Mod	V Good	9	13	**74**
60320	28TH AVE	W WASHINGTON AVE	SOUTH END	Local	Asphalt	37	680	140	2,935	41	47	80	Strng	Marginal	27	32	**42**
7860	29TH AVE	CASTLEVALE RD	HATHAWAY ST	Local	Asphalt	21	804	94	1970	85	66	60	Mod	V Good	5	10	**77.8**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
5620	29TH AVE	HATHAWAY ST	FRUITVALE BLVD	Local	Asphalt	20	345	38	805	81	62	60	Mod	V Good	10	9	**73.7**
25970	29TH AVE	SUMMITVIEW AVE	DS@673N SUMMITVIEW AVE	Local	Asphalt	31	673	116	2434	78	59	60	Mod	V Good	8	14	**70.6**
22730	29TH AVE	DS@673N SUMMITVIEW AVE	W LINCOLN AVE	Local	Asphalt	31	642	111	2,322	77	58	60	Mod	V Good	11	12	**70**
35130	29TH AVE	W CHESTNUT AVE	SOUTH END	Local	Asphalt	23	555	71	1489	36	39	80	Strng	Poor	32	33	**35.7**
46100	29TH AVE	W ARLINGTON ST	BONNIE DOONE AVE	Local	Asphalt	30	665	111	2,328	62	45	80	Strng	Fair	16	22	**56**
48160	29TH AVE	BONNIE DOONE AVE	W NOB HILL BLVD	Local	Asphalt	30	659	110	2307	71	57	60	Mod	Good	11	19	**64.7**
51190	29TH AVE	S 30TH AVE	CLINTON WY	Local	Asphalt	30	585	98	2,048	50	54	80	Strng	Fair	12	38	**51**
51470	29TH AVE	CLINTON WY	CLINTON WY	Local	Asphalt	30	205	34	718	51	51	80	Strng	Fair	11	38	**50**
52110	29TH AVE	CLINTON WY	W VIOLA AVE	Local	Asphalt	29	265	43	897	53	34	80	Strng	Marginal	4	43	**46**
54060	29TH AVE	LILA AVE	W LOGAN AVE	Local	Asphalt	30	289	48	1,012	72	57	80	Strng	Good	0	28	**66**
54230	29TH AVE	W LOGAN AVE	W LOGAN AVE	Local	Asphalt	29	118	19	399	58	41	80	Strng	Fair	11	31	**52**
55720	29TH AVE	PLATH AVE	W MEAD AVE	Local	Asphalt	30	371	62	1,299	78	58	80	Strng	V Good	1	22	**71**
17370	29TH PL	SOUTH END	MCKINLEY AVE	Local	Asphalt	35	209	40	850	64	41	80	Strng	Fair	8	29	**55**
16610	29TH PL	MCKINLEY AVE	NORTH END	Local	Asphalt	31	224	39	816	70	46	80	Strng	Good	5	25	**61**
19930	2ND AVE	W MARTIN LUTHER KING JR BLVD	W LINCOLN AVE	Local	Concrete	25	478	66	1,394	56	41	60	Mod	Fair	0	0	**50**
23860	2ND AVE	W YAKIMA AVE	DS@194N W YAKIMA AVE	Local	Concrete	31	194	33	702	69	45	60	Mod	Good	0	0	**61**
23240	2ND AVE	DS@194N W YAKIMA AVE	W A ST	Local	Concrete	44	297	73	1,525	38	64	60	Mod	Marginal	0	0	**46**
22130	2ND AVE	W A ST	W MARTIN LUTHER KING JR BLVD	Local	Concrete	40	480	107	2,240	42	55	60	Mod	Marginal	0	0	**45**
24540	2ND AVE	W YAKIMA AVE	DS@186S W YAKIMA AVE	Local	Concrete	64	186	66	1,389	56	29	60	Mod	Marginal	0	0	**46**
26440	2ND AVE	DS@186S W YAKIMA AVE	W CHESTNUT AVE	Local	Concrete	60	303	101	2,121	71	48	60	Mod	Good	0	0	**63**
28520	2ND AVE	W CHESTNUT AVE	W WALNUT ST	Local	Concrete	59	477	156	3,283	63	47	60	Mod	Fair	0	0	**57**
30630	2ND AVE	W WALNUT ST	W SPRUCE ST	Local	Asphalt	56	478	149	3,123	61	37	80	Strng	Fair	17	22	**52**
33560	2ND AVE	W SPRUCE ST	W PINE ST	Local	Asphalt	55	488	149	3,131	44	49	60	Mod	Marginal	31	25	**44**
35100	2ND AVE	W PINE ST	DS@478S W PINE ST	Local	Asphalt	42	478	112	2,342	49	37	80	Strng	Marginal	15	29	**44**
38940	2ND AVE	DS@478S W PINE ST	DIVISION ST	Local	Asphalt	42	824	192	4038	48	52	80	Strng	Marginal	17	35	**48.2**
43540	2ND AVE	PEACH ST	DS@468S PEACH ST	Local	Asphalt	29	468	75	1,583	81	68	60	Mod	V Good	4	15	**76**
44720	2ND AVE	DS@468S PEACH ST	W ARLINGTON ST	Local	Asphalt	30	275	46	963	85	66	60	Mod	V Good	4	11	**78**
46670	2ND AVE	W ARLINGTON ST	STEWART ST	Local	Asphalt	28	661	103	2,159	89	70	60	Mod	V Good	1	11	**82**
49070	2ND AVE	STEWART ST	W NOB HILL BLVD	Local	Asphalt	31	668	115	2,416	85	66	60	Mod	V Good	5	11	**78**
50400	2ND AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	32	662	118	2,471	66	46	80	Strng	Fair	15	19	**58**
52620	2ND AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	31	662	114	2,394	53	39	80	Strng	Marginal	24	23	**47**
54510	2ND AVE	W VIOLA AVE	W LOGAN AVE	Local	Asphalt	30	652	109	2282	80	61	80	Strng	V Good	0	19	**73.5**
56330	2ND AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	31	674	116	2,438	54	38	80	Strng	Marginal	17	29	**48**
57790	2ND AVE	W MEAD AVE	W KING ST	Local	Asphalt	29	668	108	2,260	66	45	60	Mod	Fair	21	13	**58**
58990	2ND AVE	W KING ST	W PIERCE ST	Local	Asphalt	24	660	88	1,848	74	53	60	Mod	Good	17	8	**66**
2600	2ND ST	E R ST	NORTH END	Local	Asphalt	41	439	100	2,100	62	51	80	Strng	Fair	6	32	**57**
6210	2ND ST	E I ST	DS@204N E I ST	Local	Asphalt	28	204	32	666	88	69	60	Mod	V Good	0	12	**81**
5500	2ND ST	DS@204N E I ST	DS@668N E I ST	Local	Asphalt	34	464	88	1,841	83	65	60	Mod	V Good	2	15	**76**
4750	2ND ST	DS@668N E I ST	BARTLETT PL	Local	Asphalt	33	319	58	1,228	80	61	60	Mod	V Good	10	10	**73**
4500	2ND ST	BARTLETT PL	E N ST	Local	Asphalt	32	667	119	2490	82	63	60	Mod	V Good	5	13	**74.6**
3590	2ND ST	E N ST	SYCAMORE ST	Local	Asphalt	32	534	95	1994	70	46	80	Strng	Good	8	23	**60.9**
8920	2ND ST	E G ST	E H ST	Local	Asphalt	46	500	128	2683	66	47	80	Strng	Fair	14	20	**58.8**
7430	2ND ST	E H ST	E I ST	Local	Asphalt	49	649	177	3,710	49	53	60	Mod	Fair	33	17	**49**
15550	2ND ST	E LINCOLN AVE	DS@192N E LINCOLN AVE	Local	Asphalt	39	192	42	874	46	57	80	Strng	Marginal	19	35	**48.5**
14790	2ND ST	DS@192N E LINCOLN AVE	E D ST	Local	Asphalt	39	287	62	1,306	54	53	80	Strng	Fair	0	46	**53**
13270	2ND ST	E D ST	E E ST	Local	Asphalt	32	480	85	1,792	55	53	80	Strng	Fair	0	44	**54**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
12030	2ND ST	E E ST	E F ST	Local	Asphalt	36	481	96	2,020	53	46	80	Strng	Fair	6	41	**49**
10370	2ND ST	E F ST	E G ST	Local	Asphalt	48	479	128	2,682	72	50	80	Strng	Good	6	22	**64**
17420	2ND ST	E MARTIN LUTHER KING JR BLVD	E LINCOLN AVE	Local	Asphalt	31	482	83	1,743	49	49	80	Strng	Marginal	10	41	**48**
21750	2ND ST	E YAKIMA AVE	DS@196N E YAKIMA AVE	Local	Asphalt	25	196	27	572	56	35	80	Strng	Marginal	20	24	**48**
21040	2ND ST	DS@196N E YAKIMA AVE	STAFF SGT PENDLETON WAY	Local	Asphalt	27	291	44	917	40	37	80	Strng	Poor	34	27	**38**
19450	2ND ST	STAFF SGT PENDLETON WAY	E MARTIN LUTHER KING JR BLVD	Local	Asphalt	43	482	115	2,418	38	44	80	Strng	Poor	31	31	**39**
22450	2ND ST	E YAKIMA AVE	DS@203S E YAKIMA AVE	Local	Asphalt	23	203	26	545	61	38	80	Strng	Fair	17	22	**52.3**
23560	2ND ST	DS@203S E YAKIMA AVE	E CHESTNUT AVE	Local	Asphalt	50	292	81	1,703	41	41	80	Strng	Marginal	28	31	**40**
25490	2ND ST	E CHESTNUT AVE	E WALNUT ST	Local	Asphalt	65	482	174	3,655	50	47	80	Strng	Marginal	16	34	**48**
28180	2ND ST	E WALNUT ST	E SPRUCE ST	Local	Asphalt	65	481	174	3,648	68	64	80	Strng	Good	7	26	**65**
30370	2ND ST	E SPRUCE ST	E PINE ST	Local	Asphalt	49	482	131	2,755	67	61	60	Mod	Good	17	16	**64**
32880	2ND ST	E PINE ST	E MAPLE ST	Local	Asphalt	49	479	130	2738	63	79	60	Mod	Good	7	30	**67.1**
34810	2ND ST	E MAPLE ST	E BEECH ST	Local	Asphalt	50	484	134	2,823	73	76	60	Mod	V Good	11	17	**73**
36780	2ND ST	E BEECH ST	E RACE ST	Local	Asphalt	49	480	131	2,744	78	70	60	Mod	V Good	6	16	**75**
39410	2ND ST	E RACE ST	PACIFIC AVE	Local	Asphalt	47	523	137	2,868	50	59	80	Strng	Fair	5	44	**52**
41140	2ND ST	PACIFIC AVE	S 3RD ST	Local	Asphalt	36	564	113	2,369	85	67	60	Mod	V Good	0	14	**79**
6690	30TH AVE	SOUTH END	HATHAWAY ST	Local	Asphalt	28	443	69	1,447	70	46	60	Mod	Good	20	10	**61**
5590	30TH AVE	HATHAWAY ST	W J ST	Local	Asphalt	20	347	39	810	78	58	60	Mod	V Good	13	9	**71**
5010	30TH AVE	W J ST	FRUITVALE BLVD	Local	Asphalt	21	196	23	480	100	90	60	Mod	Excellent	0	0	**96**
20280	30TH AVE	W LINCOLN AVE	RICHEY RD	Local	Asphalt	32	270	48	1,008	62	32	80	Strng	Fair	19	18	**52**
18960	30TH AVE	RICHEY RD	MCKINLEY AVE	Local	Asphalt	34	492	93	1,952	64	57	80	Strng	Good	10	27	**60**
22360	30TH AVE	SOUTH END	W LINCOLN AVE	Local	Asphalt	23	505	65	1,355	50	37	80	Strng	Marginal	17	32	**45**
25910	30TH AVE	SUMMITVIEW AVE	CLEMAN AVE	Local	Asphalt	24	838	112	2,346	58	45	60	Mod	Fair	25	17	**52**
30850	30TH AVE	W YAKIMA AVE	BARGE ST	Local	Asphalt	23	328	42	880	61	52	80	Strng	Fair	17	22	**57**
29280	30TH AVE	BARGE ST	SUMMITVIEW AVE	Local	Asphalt	23	658	84	1,766	62	55	60	Mod	Fair	17	21	**59**
32700	30TH AVE	N 30TH AVE	W CHESTNUT AVE	Local	Asphalt	23	326	42	875	74	53	60	Mod	Good	8	18	**66**
35760	30TH AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	23	659	84	1768	41	46	80	Strng	Marginal	30	30	**41.4**
38320	30TH AVE	W WALNUT ST	TIETON DR	Local	Asphalt	28	651	101	2,127	25	34	80	Strng	Poor	44	32	**27**
40350	30TH AVE	TIETON DR	SHELTON AVE	Local	Asphalt	31	397	68	1,436	69	46	80	Strng	Good	9	22	**61**
42430	30TH AVE	SHELTON AVE	BRACKETT AVE	Local	Asphalt	29	556	90	1,881	64	64	60	Mod	Good	19	17	**63**
44130	30TH AVE	BRACKETT AVE	W ARLINGTON ST	Local	Asphalt	30	377	63	1,320	73	51	60	Mod	Good	12	15	**65**
46140	30TH AVE	W ARLINGTON ST	BONNIE DOONE AVE	Local	Asphalt	29	668	108	2,260	64	44	60	Mod	Fair	22	14	**56**
47140	30TH AVE	BONNIE DOONE AVE	SOUTH END	Local	Asphalt	30	175	29	613	28	29	80	Strng	Poor	38	34	**28**
51140	30TH AVE	S 29TH AVE	CLINTON WY	Local	Asphalt	30	608	101	2128	50	50	80	Strng	Marginal	11	39	**48.8**
51450	30TH AVE	CLINTON WY	CLINTON WY	Local	Asphalt	30	170	28	595	53	50	80	Strng	Fair	6	41	**52**
54260	30TH AVE	NORTH END	W LOGAN AVE	Local	Asphalt	39	180	39	823	69	45	80	Strng	Good	8	23	**60**
55700	30TH AVE	PLATH AVE	W MEAD AVE	Local	Asphalt	30	373	62	1,306	68	51	80	Strng	Good	5	28	**61**
20240	31ST AVE	W LINCOLN AVE	NORTH END	Local	Asphalt	31	692	119	2,503	78	61	60	Mod	V Good	10	12	**71**
25870	31ST AVE	SUMMITVIEW AVE	DS@751N SUMMITVIEW AVE	Local	Asphalt	31	751	129	2716	72	50	60	Mod	Good	11	17	**63.7**
22530	31ST AVE	DS@751N SUMMITVIEW AVE	W LINCOLN AVE	Local	Asphalt	31	560	96	2,025	71	49	80	Strng	Good	8	20	**63**
29240	31ST AVE	BARGE ST	SUMMITVIEW AVE	Local	Asphalt	23	657	84	1,763	57	43	80	Strng	Fair	19	24	**51**
35630	31ST AVE	W CHESTNUT AVE	DS@656S W CHESTNUT AVE	Local	Asphalt	22	656	80	1,684	59	44	80	Strng	Fair	14	27	**53**
38230	31ST AVE	DS@656S W CHESTNUT AVE	TIETON DR	Local	Asphalt	29	652	105	2,206	39	39	80	Strng	Poor	30	31	**38**
40300	31ST AVE	TIETON DR	DS@400S TIETON DR	Local	Asphalt	29	400	64	1353	65	59	60	Mod	Good	14	21	**62.2**
42480	31ST AVE	DS@400S TIETON DR	DS@993S TIETON DR	Local	Asphalt	31	593	102	2145	74	71	60	Mod	V Good	12	14	**72.1**
44090	31ST AVE	DS@993S TIETON DR	W ARLINGTON ST	Local	Asphalt	29	337	54	1,140	68	45	80	Strng	Good	13	20	**59**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name

GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
46080	31ST AVE	W ARLINGTON ST	BONNIE DOONE AVE	Local	Asphalt	29	670	108	2,267	65	57	60	Mod	Good	18	17	**61**
48040	31ST AVE	BONNIE DOONE AVE	W NOB HILL BLVD	Local	Asphalt	29	660	106	2,233	59	45	60	Mod	Fair	22	19	**54**
51130	31ST AVE	W NOB HILL BLVD	CLINTON WY	Local	Asphalt	30	851	142	2,979	56	45	80	Strng	Fair	18	27	**51**
52060	31ST AVE	CLINTON WY	W VIOLA AVE	Local	Asphalt	29	472	76	1597	66	48	80	Strng	Good	9	24	**59.6**
54220	31ST AVE	LILA AVE	W LOGAN AVE	Local	Asphalt	30	415	69	1,453	61	53	80	Strng	Fair	8	31	**57**
55680	31ST AVE	NORTH END	W MEAD AVE	Local	Asphalt	34	386	73	1,527	66	43	80	Strng	Fair	11	23	**57**
3850	32ND AVE	RIVER RD	NORTH END	Local	Asphalt	33	596	109	2295	85	67	60	Mod	V Good	3	12	**78.5**
9420	32ND AVE	SOUTH END	CASTLEVALE RD	Local	Asphalt	35	640	124	2613	89	70	60	Mod	V Good	5	6	**81.6**
20140	32ND AVE	W LINCOLN AVE	DS@162N W LINCOLN AVE	Minor Arterial	Asphalt	26	162	23	491	81	62	80	Strng	V Good	0	19	**74**
19200	32ND AVE	DS@162N W LINCOLN AVE	DS@399N W LINCOLN AVE	Minor Arterial	Asphalt	23	238	30	639	65	49	80	Strng	Good	14	21	**59**
18070	32ND AVE	DS@399N W LINCOLN AVE	PONDEROSA PL	Minor Arterial	Asphalt	21	380	44	931	82	63	60	Mod	V Good	3	15	**75**
16510	32ND AVE	PONDEROSA PL	REDWOOD WY	Minor Arterial	Asphalt	21	208	24	510	92	77	60	Mod	Excellent	0	8	**86**
15790	32ND AVE	REDWOOD WY	DITTER DR	Minor Arterial	Asphalt	20	146	16	341	100	90	60	Mod	Excellent	0	0	**95**
14950	32ND AVE	DITTER DR	ENGLEWOOD AVE	Minor Arterial	Asphalt	21	178	21	436	61	48	80	Strng	Fair	14	24	**55**
25710	32ND AVE	SUMMITVIEW AVE	FOLSOM AVE	Other	Asphalt	30	527	88	1,845	40	36	80	Strng	Poor	36	24	**38**
23500	32ND AVE	FOLSOM AVE	JEFFERSON AVE	Other	Asphalt	23	463	59	1,242	59	54	80	Strng	Fair	17	24	**57**
21530	32ND AVE	JEFFERSON AVE	W LINCOLN AVE	Other	Asphalt	26	315	46	956	44	41	80	Strng	Marginal	23	23	**42**
30720	32ND AVE	W YAKIMA AVE	BARGE ST	Other	Asphalt	31	330	57	1,194	45	58	80	Strng	Marginal	23	32	**48**
29190	32ND AVE	BARGE ST	SUMMITVIEW AVE	Other	Asphalt	32	658	117	2,457	49	48	80	Strng	Marginal	24	20	**48**
31800	32ND AVE	N 32ND AVE	DS@187S N 32ND AVE	Other	Asphalt	30	187	31	655	71	48	80	Strng	Good	11	18	**63**
32550	32ND AVE	DS@187S N 32ND AVE	W CHESTNUT AVE	Other	Asphalt	31	139	24	503	60	48	80	Strng	Fair	15	25	**55**
34910	32ND AVE	W CHESTNUT AVE	HOME DR	Other	Asphalt	29	502	81	1,698	69	75	60	Mod	V Good	17	15	**70**
35900	32ND AVE	HOME DR	DS@171S HOME DR	Other	Asphalt	31	171	29	618	48	36	80	Strng	Marginal	26	26	**43**
38190	32ND AVE	DS@171S HOME DR	TIETON DR	Other	Asphalt	30	634	106	2219	31	34	60	Mod	Poor	44	25	**30.5**
40630	32ND AVE	TIETON DR	VOLTAIRE AVE	Other	Asphalt	29	513	83	1,736	64	50	60	Mod	Fair	27	9	**58**
42200	32ND AVE	VOLTAIRE AVE	WEBSTER AVE	Other	Asphalt	24	351	47	983	71	57	60	Mod	Good	16	13	**65**
44070	32ND AVE	WEBSTER AVE	W ARLINGTON ST	Other	Asphalt	31	466	80	1,685	82	63	60	Mod	V Good	3	15	**75**
46050	32ND AVE	W ARLINGTON ST	BONNIE DOONE AVE	Other	Asphalt	25	668	93	1,948	68	58	60	Mod	Good	22	10	**63**
47960	32ND AVE	BONNIE DOONE AVE	W NOB HILL BLVD	Other	Asphalt	25	659	92	1,922	64	48	60	Mod	Fair	23	13	**57**
49680	32ND AVE	W NOB HILL BLVD	VINCENTA WY	Other	Asphalt	67	350	130	2736	60	44	80	Strng	Fair	19	21	**53.8**
50900	32ND AVE	VINCENTA WY	CLINTON WY	Other	Asphalt	39	437	95	1,988	67	51	80	Strng	Good	10	23	**61**
51790	32ND AVE	CLINTON WY	CAROL AVE	Other	Asphalt	38	386	81	1,711	58	51	60	Mod	Fair	21	21	**54**
52050	32ND AVE	CAROL AVE	W VIOLA AVE	Other	Asphalt	37	152	31	656	44	47	80	Strng	Marginal	24	32	**44**
52920	32ND AVE	W VIOLA AVE	W VIOLA AVE	Other	Asphalt	38	142	30	630	45	52	80	Strng	Marginal	27	28	**46**
53400	32ND AVE	W VIOLA AVE	LILA AVE	Other	Asphalt	41	114	26	545	64	49	60	Mod	Fair	19	17	**58**
53970	32ND AVE	LILA AVE	GREGORY AVE	Other	Asphalt	36	285	57	1,197	68	62	80	Strng	Good	5	26	**65**
54200	32ND AVE	GREGORY AVE	DS@113S GREGORY AVE	Other	Asphalt	39	113	24	514	73	54	80	Strng	Good	0	27	**66**
54940	32ND AVE	DS@113S GREGORY AVE	W LOGAN AVE	Other	Asphalt	38	135	29	599	70	52	80	Strng	Good	0	30	**63**
55490	32ND AVE	W LOGAN AVE	PLATH AVE	Other	Asphalt	38	409	86	1813	61	58	80	Strng	Fair	10	29	**58.8**
55670	32ND AVE	PLATH AVE	W MEAD AVE	Other	Asphalt	37	126	26	544	53	41	80	Strng	Marginal	18	29	**48.2**
57090	32ND AVE	W KING ST	S 32ND PL	Local	Asphalt	28	356	55	1,163	66	68	80	Strng	Good	0	34	**66**
57600	32ND PL	S 32ND AVE	SOUTH END	Local	Asphalt	30	240	40	831	75	55	80	Strng	Good	3	22	**68**
25690	33RD AVE	SUMMITVIEW AVE	FOLSOM AVE	Local	Asphalt	31	527	91	1,906	63	55	80	Strng	Good	12	24	**60**
23490	33RD AVE	FOLSOM AVE	NE END	Local	Asphalt	33	275	50	1,059	49	59	80	Strng	Fair	13	38	**52**
34240	33RD AVE	W CHESTNUT AVE	SOUTH END	Local	Asphalt	31	321	55	1,161	62	40	80	Strng	Fair	17	21	**54**
46020	33RD AVE	NORTH END	DS@641S NORTH END	Local	Asphalt	22	641	78	1,645	57	54	60	Mod	Fair	22	21	**55**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name

GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
47980	33RD AVE	DS@641S NORTH END	W NOB HILL BLVD	Local	Asphalt	21	672	78	1646	70	58	60	Mod	Good	15	15	**65.4**
50890	33RD AVE	VINCENTA WY	CLINTON WY	Local	Asphalt	30	438	73	1533	66	46	80	Strng	Fair	12	22	**58.8**
51780	33RD AVE	CLINTON WY	CAROL AVE	Local	Asphalt	29	387	62	1,309	72	64	80	Strng	Good	0	28	**69**
52040	33RD AVE	CAROL AVE	DS@142S CAROL AVE	Local	Asphalt	29	142	23	480	71	52	80	Strng	Good	0	29	**64**
52950	33RD AVE	DS@142S CAROL AVE	W VIOLA AVE	Local	Asphalt	31	154	27	557	58	39	80	Strng	Fair	17	25	**51**
55460	33RD AVE	PLATH AVE	W LOGAN AVE	Local	Asphalt	30	387	65	1,355	54	47	80	Strng	Fair	14	32	**50**
7730	34TH AVE	CASTLEVALE RD	CASCADE LP	Local	Asphalt	30	550	92	1,925	68	54	80	Strng	Good	8	25	**62**
6340	34TH AVE	CASCADE LP	DS@117N CASCADE LP	Local	Asphalt	31	117	20	423	75	60	80	Strng	Good	0	25	**68.9**
5920	34TH AVE	DS@117N CASCADE LP	UNNAMED - 5740	Local	Asphalt	31	89	15	322	65	60	80	Strng	Good	8	27	**62.5**
5730	34TH AVE	UNNAMED - 5740	DS@604N UNNAMED - 5740	Local	Asphalt	30	604	101	2,114	55	59	80	Strng	Fair	17	28	**55**
4680	34TH AVE	DS@604N UNNAMED - 5740	RIVER RD	Local	Asphalt	27	616	92	1940	66	50	60	Mod	Good	20	14	**59.6**
3920	34TH AVE	RIVER RD	FRUITVALE BLVD	Local	Asphalt	39	122	26	555	52	20	80	Strng	Marginal	13	35	**39.9**
10240	34TH AVE	POWERHOUSE RD	DS@289N POWERHOUSE RD	Local	Asphalt	32	289	51	1079	76	55	60	Mod	Good	13	12	**67.8**
9240	34TH AVE	DS@289N POWERHOUSE RD	CASTLEVALE RD	Local	Asphalt	24	571	76	1599	72	59	60	Mod	Good	9	19	**66.6**
14130	34TH AVE	ENGLEWOOD AVE	FAIRBANKS AVE	Local	Asphalt	31	278	48	1005	68	45	80	Strng	Good	13	19	**59.6**
13120	34TH AVE	FAIRBANKS AVE	DS@674N FAIRBANKS AVE	Local	Asphalt	29	674	109	2280	53	58	60	Mod	Fair	23	24	**52.9**
10840	34TH AVE	DS@674N FAIRBANKS AVE	POWERHOUSE RD	Local	Asphalt	31	175	30	633	55	27	80	Strng	Marginal	19	26	**44**
15600	34TH AVE	SOUTH END	ENGLEWOOD AVE	Local	Asphalt	21	292	34	715	38	28	80	Strng	Poor	33	29	**34**
20180	34TH AVE	W LINCOLN AVE	BURNING TREE DR	Local	Asphalt	31	258	44	933	80	61	80	Strng	V Good	0	20	**74**
25750	34TH AVE	SUMMITVIEW AVE	JEFFERSON AVE	Local	Asphalt	32	1,006	179	3,756	73	54	60	Mod	Good	9	17	**66**
21480	34TH AVE	JEFFERSON AVE	W LINCOLN AVE	Local	Asphalt	32	312	55	1,165	67	41	80	Strng	Fair	4	29	**57**
30770	34TH AVE	W YAKIMA AVE	BARGE ST	Local	Asphalt	23	325	42	872	89	69	60	Mod	V Good	0	12	**82**
29270	34TH AVE	BARGE ST	TAYLOR WY	Local	Asphalt	25	170	24	496	78	58	60	Mod	V Good	6	17	**70**
28470	34TH AVE	TAYLOR WY	SHARON WY	Local	Asphalt	23	147	19	394	68	45	80	Strng	Good	6	26	**60**
32580	34TH AVE	W YAKIMA AVE	W CHESTNUT AVE	Local	Asphalt	11	324	20	416	51	42	80	Strng	Marginal	15	35	**46**
34940	34TH AVE	W CHESTNUT AVE	HOME DR	Local	Asphalt	30	505	84	1,768	41	39	80	Strng	Marginal	29	31	**39**
35600	34TH AVE	HOME DR	W WALNUT ST	Local	Asphalt	21	149	17	365	70	47	80	Strng	Good	1	29	**62**
38220	34TH AVE	W WALNUT ST	TIETON DR	Local	Asphalt	30	655	109	2,293	38	40	80	Strng	Poor	31	32	**38**
39970	34TH AVE	TIETON DR	DS@244S TIETON DR	Local	Asphalt	30	244	41	854	63	39	80	Strng	Fair	14	23	**54**
41240	34TH AVE	DS@244S TIETON DR	WEBSTER AVE	Local	Asphalt	30	421	70	1,474	57	60	80	Strng	Fair	17	26	**57**
42180	34TH AVE	WEBSTER AVE	WEBSTER AVE	Local	Asphalt	30	196	33	686	72	50	80	Strng	Good	8	20	**64**
42410	34TH AVE	WEBSTER AVE	DS@98S WEBSTER AVE	Local	Asphalt	29	98	16	332	72	50	80	Strng	Good	6	21	**64.2**
45130	34TH AVE	DS@98S WEBSTER AVE	ROSE PL	Local	Asphalt	30	500	83	1750	58	53	80	Strng	Fair	16	26	**55.2**
46010	34TH AVE	ROSE PL	DS@526S ROSE PL	Local	Asphalt	30	526	88	1841	53	68	60	Mod	Fair	24	23	**56.6**
48000	34TH AVE	DS@526S ROSE PL	W NOB HILL BLVD	Local	Asphalt	29	672	108	2274	40	63	60	Mod	Marginal	28	33	**46.1**
49630	34TH AVE	W NOB HILL BLVD	VINCENTA WY	Local	Asphalt	30	337	56	1,180	57	36	80	Strng	Marginal	14	29	**49**
50030	34TH AVE	VINCENTA WY	W PRASCH AVE	Local	Asphalt	29	219	35	741	57	42	80	Strng	Fair	18	25	**51**
50200	34TH AVE	W PRASCH AVE	DS@113S W PRASCH AVE	Local	Asphalt	30	113	19	396	68	43	80	Strng	Fair	1	31	**59**
51170	34TH AVE	DS@113S W PRASCH AVE	CLINTON WY	Local	Asphalt	23	195	25	523	78	68	60	Mod	V Good	10	12	**74**
51660	34TH AVE	CLINTON WY	CAROL AVE	Local	Asphalt	27	259	39	816	65	62	60	Mod	Good	13	22	**63**
52030	34TH AVE	CAROL AVE	DS@186S CAROL AVE	Local	Asphalt	25	186	26	543	67	55	80	Strng	Good	12	21	**62**
52930	34TH AVE	DS@186S CAROL AVE	W VIOLA AVE	Local	Asphalt	34	157	30	623	71	57	60	Mod	Good	12	17	**65**
53590	34TH AVE	W VIOLA AVE	SUSAN AVE	Local	Asphalt	30	156	26	546	38	45	60	Mod	Marginal	38	24	**39**
54010	34TH AVE	SUSAN AVE	GREGORY AVE	Local	Asphalt	29	245	39	829	41	45	80	Strng	Marginal	32	27	**41**
55380	34TH AVE	GREGORY AVE	W LOGAN AVE	Local	Asphalt	24	577	77	1,616	70	63	60	Mod	Good	14	16	**67**
55660	34TH AVE	W LOGAN AVE	DS@199S W LOGAN AVE	Local	Asphalt	24	199	27	557	48	50	60	Mod	Marginal	29	23	**47**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
56490	34TH AVE	DS@199S W LOGAN AVE	W KING ST	Local	Asphalt	30	138	23	483	52	30	80	Strng	Marginal	14	35	**44**
4650	35TH AVE	RIVER RD	SOUTH END	Local	Asphalt	32	535	95	1,997	56	53	80	Strng	Fair	10	33	**54**
20100	35TH AVE	W LINCOLN AVE	BURNING TREE DR	Local	Asphalt	22	256	31	657	56	38	80	Strng	Fair	18	26	**49**
19000	35TH AVE	BURNING TREE DR	DS@229N BURNING TREE DR	Local	Asphalt	20	229	25	534	59	54	80	Strng	Fair	3	38	**56**
17700	35TH AVE	DS@229N BURNING TREE DR	ROOSEVELT AVE	Local	Asphalt	43	477	114	2,393	59	52	80	Strng	Fair	8	33	**56**
15860	35TH AVE	ROOSEVELT AVE	HIGHVIEW DR	Local	Asphalt	34	184	35	730	52	36	80	Strng	Marginal	13	35	**45**
14910	35TH AVE	HIGHVIEW DR	ENGLEWOOD AVE	Local	Asphalt	29	163	26	551	45	36	80	Strng	Marginal	13	42	**41**
25730	35TH AVE	SUMMITVIEW AVE	JEFFERSON AVE	Local	Asphalt	32	996	177	3,718	80	61	60	Mod	V Good	6	14	**73**
21470	35TH AVE	JEFFERSON AVE	W LINCOLN AVE	Local	Asphalt	31	311	54	1125	74	53	60	Mod	Good	9	17	**66.2**
35620	35TH AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	30	654	109	2,289	66	52	60	Mod	Good	14	20	**60**
38260	35TH AVE	W WALNUT ST	TIETON DR	Local	Asphalt	29	655	106	2,216	66	45	60	Mod	Fair	17	17	**58**
41260	35TH AVE	TIETON DR	WEBSTER AVE	Local	Asphalt	29	663	107	2,243	72	54	60	Mod	Good	11	17	**65**
43910	35TH AVE	WEBSTER AVE	SOUTH END	Local	Asphalt	33	605	112	2,355	70	50	80	Strng	Good	11	19	**63**
55330	35TH PL	NORTH END	W LOGAN AVE	Local	Asphalt	38	248	52	1,087	51	41	80	Strng	Marginal	20	28	**47**
20040	36TH AVE	W LINCOLN AVE	RICHEY RD	Local	Asphalt	39	337	73	1,533	61	37	80	Strng	Fair	11	28	**52**
25800	36TH AVE	SUMMITVIEW AVE	DS@724N SUMMITVIEW AVE	Local	Asphalt	33	724	133	2,787	81	62	60	Mod	V Good	4	15	**74**
22590	36TH AVE	DS@724N SUMMITVIEW AVE	W LINCOLN AVE	Local	Asphalt	32	585	104	2,184	84	66	60	Mod	V Good	5	11	**77**
30740	36TH AVE	W YAKIMA AVE	BARGE ST	Local	Concrete	20	316	35	737	39	34	60	Mod	Poor	0	0	**36.9**
29330	36TH AVE	BARGE ST	TAYLOR WY	Local	Concrete	20	173	19	404	35	44	60	Mod	Poor	0	0	**38**
28500	36TH AVE	TAYLOR WY	SUMMITVIEW AVE	Local	Concrete	20	500	56	1,167	41	29	60	Mod	Poor	0	0	**36**
31330	36TH AVE	N 36TH AVE	HILLCREST CT	Local	Concrete	18	80	8	168	40	32	60	Mod	Poor	0	0	**36**
32680	36TH AVE	HILLCREST CT	W CHESTNUT AVE	Local	Concrete	20	250	28	583	46	33	60	Mod	Marginal	0	0	**41**
34150	36TH AVE	W CHESTNUT AVE	DS@285S W CHESTNUT AVE	Local	Asphalt	29	285	46	964	83	64	60	Mod	V Good	4	12	**76.1**
35650	36TH AVE	DS@285S W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	30	369	62	1,292	81	70	60	Mod	V Good	4	16	**76**
38310	36TH AVE	W WALNUT ST	TIETON DR	Local	Asphalt	30	655	109	2,293	69	47	80	Strng	Good	13	18	**61**
73100	36TH AVE	TIETON DR	WEBSTER AVE	Local	Asphalt	30	665	111	2328	74	53	60	Mod	Good	10	16	**66.2**
42380	36TH AVE	WEBSTER AVE	DS@269S WEBSTER AVE	Local	Asphalt	29	269	43	910	80	72	60	Mod	V Good	3	17	**77**
43600	36TH AVE	DS@269S WEBSTER AVE	W ARLINGTON ST	Local	Asphalt	28	229	36	748	77	61	60	Mod	V Good	4	19	**71**
44110	36TH AVE	W ARLINGTON ST	DS@166S W ARLINGTON ST	Local	Asphalt	30	166	28	581	81	62	60	Mod	V Good	4	15	**74.2**
45980	36TH AVE	DS@166S W ARLINGTON ST	DS@803S W ARLINGTON ST	Local	Asphalt	29	638	103	2159	71	64	60	Mod	Good	10	20	**67.6**
47120	36TH AVE	DS@803S W ARLINGTON ST	S 37TH AVE	Local	Asphalt	29	215	35	727	69	65	60	Mod	Good	8	23	**66.6**
47370	36TH AVE	S 37TH AVE	ROSE PL	Local	Asphalt	28	237	37	774	64	46	80	Strng	Fair	12	24	**57**
48010	36TH AVE	ROSE PL	W NOB HILL BLVD	Local	Asphalt	30	276	46	966	56	42	80	Strng	Fair	20	24	**50.3**
52080	36TH AVE	CAROL AVE	DS@202S CAROL AVE	Local	Asphalt	32	202	36	754	51	45	80	Strng	Marginal	24	25	**47.9**
52350	36TH AVE	DS@202S CAROL AVE	VIOLA CT	Local	Asphalt	32	44	8	164	63	37	80	Strng	Fair	5	32	**54**
53340	36TH AVE	VIOLA CT	SUSAN AVE	Local	Asphalt	33	200	37	770	68	56	80	Strng	Good	0	32	**63**
53570	36TH AVE	SUSAN AVE	SUSAN AVE	Local	Asphalt	32	48	9	179	63	62	80	Strng	Good	9	28	**62**
53980	36TH AVE	SUSAN AVE	GREGORY CT	Local	Asphalt	33	247	45	951	68	61	80	Strng	Good	0	32	**65**
55200	36TH AVE	GREGORY CT	W LOGAN LN	Local	Asphalt	34	450	85	1,785	57	55	80	Strng	Fair	3	40	**55**
57440	36TH AVE	NORTH END	DS@230S NORTH END	Local	Asphalt	30	230	38	805	32	58	80	Strng	Marginal	29	40	**39**
58780	36TH AVE	DS@230S NORTH END	W WASHINGTON AVE	Local	Asphalt	31	709	122	2564	53	61	80	Strng	Fair	15	31	**54.9**
63220	36TH AVE	DS@787S SPRING CREEK RD	DS@1596S SPRING CREEK RD	Local	Asphalt	39	809	175	3,681	100	90	60	Mod	Excellent	0	0	**96**
63660	36TH AVE	DS@1596S SPRING CREEK RD	SORENSON RD	Local	Asphalt	41	502	114	2401	100	90	60	Mod	Excellent	0	0	**95.6**
14100	37TH AVE	ENGLEWOOD AVE	FAIRBANKS AVE	Local	Asphalt	30	279	47	977	52	36	80	Strng	Marginal	20	28	**45.8**
20020	37TH AVE	W LINCOLN AVE	RICHEY RD	Local	Asphalt	30	374	62	1,309	35	34	80	Strng	Poor	29	37	**33**
25840	37TH AVE	SUMMITVIEW AVE	DS@725N SUMMITVIEW AVE	Local	Asphalt	23	725	93	1,945	70	57	60	Mod	Good	12	18	**65**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
22600	37TH AVE	DS@725N SUMMITVIEW AVE	EASTVIEW DR	Local	Asphalt	24	374	50	1,047	67	49	80	Strng	Good	12	21	**60**
21190	37TH AVE	EASTVIEW DR	W LINCOLN AVE	Local	Asphalt	25	214	30	624	70	46	80	Strng	Good	11	19	**60.7**
32730	37TH AVE	W CHESTNUT AVE	DS@863N W CHESTNUT AVE	Local	Asphalt	31	863	149	3,121	77	69	60	Mod	V Good	9	13	**74**
28330	37TH AVE	DS@863N W CHESTNUT AVE	SUMMITVIEW AVE	Local	Asphalt	30	458	76	1,603	79	59	60	Mod	V Good	4	18	**71**
35710	37TH AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	30	666	111	2331	74	54	80	Strng	Good	7	19	**66.6**
38360	37TH AVE	W WALNUT ST	TIETON DR	Local	Asphalt	21	654	76	1,602	74	57	60	Mod	Good	9	17	**67**
45830	37TH AVE	NORTH END	BONNIE DOONE AVE	Local	Asphalt	31	454	79	1,660	62	41	80	Strng	Fair	7	31	**54**
48090	37TH AVE	S 36TH AVE	W NOB HILL BLVD	Local	Asphalt	29	760	122	2571	61	44	80	Strng	Fair	9	30	**54.6**
51920	37TH AVE	CLINTON WY	CAROL AVE	Local	Asphalt	28	418	65	1,365	58	34	80	Strng	Fair	7	34	**49**
25810	38TH AVE	SUMMITVIEW AVE	MAVIS AVE	Local	Asphalt	31	748	129	2705	40	42	80	Strng	Marginal	27	33	**39.9**
22610	38TH AVE	MAVIS AVE	NORTH END	Local	Asphalt	39	169	37	774	43	25	80	Strng	Poor	27	30	**36.3**
37240	38TH AVE	W WALNUT ST	SOUTH END	Local	Asphalt	29	364	59	1,232	44	52	80	Strng	Marginal	21	35	**46**
40120	38TH AVE	TIETON DR	MEADOW LN	Local	Asphalt	34	335	63	1329	44	47	60	Mod	Marginal	30	26	**43.8**
41320	38TH AVE	MEADOW LN	WEBSTER AVE	Local	Asphalt	29	325	52	1,100	46	36	80	Strng	Marginal	28	26	**42**
42390	38TH AVE	WEBSTER AVE	DS@276S WEBSTER AVE	Local	Asphalt	29	276	44	934	48	36	80	Strng	Marginal	25	27	**43**
43630	38TH AVE	DS@276S WEBSTER AVE	W ARLINGTON ST	Local	Asphalt	29	224	36	758	59	41	80	Strng	Fair	14	27	**51.8**
44210	38TH AVE	W ARLINGTON ST	DS@171S W ARLINGTON ST	Local	Asphalt	30	171	29	599	67	53	80	Strng	Good	10	23	**61.4**
45810	38TH AVE	DS@171S W ARLINGTON ST	BONNIE DOONE AVE	Local	Asphalt	30	502	84	1757	48	51	80	Strng	Marginal	25	26	**48.2**
46120	38TH AVE	BONNIE DOONE AVE	DS@162S BONNIE DOONE AVE	Local	Asphalt	29	162	26	548	64	60	60	Mod	Good	15	21	**62**
46990	38TH AVE	DS@162S BONNIE DOONE AVE	PARKWAY PL	Local	Asphalt	30	117	20	410	65	60	80	Strng	Good	11	24	**62.7**
48100	38TH AVE	PARKWAY PL	W NOB HILL BLVD	Local	Asphalt	29	541	87	1830	49	58	80	Strng	Fair	23	28	**50.9**
49870	38TH AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	32	444	79	1658	50	37	80	Strng	Marginal	19	31	**44.1**
51420	38TH AVE	W PRASCH AVE	CLINTON WY	Local	Asphalt	31	569	98	2,058	58	66	60	Mod	Good	15	26	**60**
51940	38TH AVE	CLINTON WY	CAROL AVE	Local	Asphalt	31	190	33	687	53	58	80	Strng	Fair	20	27	**53.2**
52100	38TH AVE	CAROL AVE	VIOLA CT	Local	Asphalt	29	123	20	416	53	57	60	Mod	Fair	22	25	**53**
53300	38TH AVE	VIOLA CT	MCLEAN DR	Local	Asphalt	16	235	21	439	68	70	60	Mod	Good	11	20	**67.8**
54240	38TH AVE	MCLEAN DR	W LOGAN AVE	Local	Asphalt	18	442	44	928	66	63	60	Mod	Good	11	23	**64**
13050	39TH AVE	FAIRBANKS AVE	KERN RD	Local	Asphalt	33	1,143	210	4,401	33	62	60	Mod	Marginal	38	29	**41**
9520	39TH AVE	KERN RD	CASTLEVALE RD	Local	Asphalt	30	700	117	2,450	44	46	80	Strng	Marginal	28	28	**44**
14060	39TH AVE	ENGLEWOOD AVE	FAIRBANKS AVE	Local	Asphalt	31	278	48	1,005	33	42	80	Strng	Poor	33	34	**35**
73070	39TH AVE	W LINCOLN AVE	NORTH END	Local	Asphalt	40	188	41	870	60	33	80	Strng	Fair	8	32	**50.3**
32690	39TH AVE	W CHESTNUT AVE	BELGOLD DR	Local	Asphalt	31	274	47	991	67	41	80	Strng	Fair	8	25	**57**
31300	39TH AVE	BELGOLD DR	BELGOLD DR	Local	Asphalt	32	259	46	967	62	46	80	Strng	Fair	16	21	**56**
30040	39TH AVE	BELGOLD DR	KENNY DR	Local	Asphalt	32	323	57	1,206	65	37	80	Strng	Fair	10	25	**55**
28340	39TH AVE	KENNY DR	KENNY DR	Local	Asphalt	32	233	41	870	69	67	80	Strng	Good	5	26	**67**
27320	39TH AVE	KENNY DR	SUMMITVIEW AVE	Local	Asphalt	30	229	38	802	66	47	60	Mod	Fair	16	18	**59**
34640	39TH AVE	N 39TH AVE	CASA CT	Local	Asphalt	30	433	72	1,516	63	45	80	Strng	Fair	10	26	**56**
35720	39TH AVE	CASA CT	W WALNUT ST	Local	Asphalt	30	224	37	784	70	46	80	Strng	Good	7	24	**61**
51360	39TH AVE	W PRASCH AVE	CLINTON WY	Local	Asphalt	28	525	82	1,715	59	60	80	Strng	Fair	10	31	**58**
14580	3RD AVE	CHERRY AVE	DS@179N CHERRY AVE	Local	Asphalt	24	179	24	501	75	54	80	Strng	Good	5	21	**67**
13380	3RD AVE	DS@179N CHERRY AVE	POPLAR ST	Local	Asphalt	23	474	61	1,272	62	52	60	Mod	Fair	17	21	**57**
12060	3RD AVE	POPLAR ST	WILLOW ST	Local	Asphalt	24	678	90	1,898	50	43	80	Strng	Marginal	25	25	**47**
18470	3RD AVE	W LINCOLN AVE	W D ST	Local	Asphalt	59	489	160	3,366	75	55	80	Strng	Good	6	19	**68**
16360	3RD AVE	W D ST	NORTH END	Local	Asphalt	38	129	27	572	68	46	60	Mod	Good	19	13	**59.9**
20920	3RD AVE	W MARTIN LUTHER KING JR BLVD	W LINCOLN AVE	Minor Arterial	Asphalt	59	479	157	3297	69	59	60	Mod	Good	12	19	**64.2**
24280	3RD AVE	W YAKIMA AVE	DS@192N W YAKIMA AVE	Minor Arterial	Asphalt	58	192	62	1299	77	57	80	Strng	V Good	4	19	**69.1**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
23660	3RD AVE	DS@192N W YAKIMA AVE	W A ST	Minor Arterial	Asphalt	67	299	111	2337	72	79	60	Mod	V Good	10	18	**73.1**
22480	3RD AVE	W A ST	W MARTIN LUTHER KING JR BLVD	Minor Arterial	Asphalt	59	479	157	3297	73	72	60	Mod	V Good	9	18	**71.7**
25250	3RD AVE	W YAKIMA AVE	DS@187S W YAKIMA AVE	Minor Arterial	Asphalt	66	187	69	1440	69	55	60	Mod	Good	15	16	**63**
27020	3RD AVE	DS@187S W YAKIMA AVE	W CHESTNUT AVE	Minor Arterial	Asphalt	37	303	62	1308	71	81	60	Mod	V Good	9	20	**73.5**
29130	3RD AVE	W CHESTNUT AVE	W WALNUT ST	Minor Arterial	Asphalt	58	480	155	3248	68	66	60	Mod	Good	8	24	**66.2**
31390	3RD AVE	W WALNUT ST	W SPRUCE ST	Minor Arterial	Asphalt	60	481	160	3367	53	71	60	Mod	Fair	23	24	**57.1**
33990	3RD AVE	W SPRUCE ST	W PINE ST	Minor Arterial	Asphalt	58	481	155	3255	49	81	60	Mod	Fair	22	29	**58**
36110	3RD AVE	W PINE ST	DS@474S W PINE ST	Minor Arterial	Asphalt	57	474	150	3152	39	76	60	Mod	Fair	29	32	**49.7**
38970	3RD AVE	DS@474S W PINE ST	DIVISION ST	Minor Arterial	Asphalt	43	707	169	3547	56	82	60	Mod	Good	13	31	**63.2**
40990	3RD AVE	DIVISION ST	PEACH ST	Minor Arterial	Asphalt	43	518	124	2599	62	74	60	Mod	Good	11	27	**65**
41280	3RD AVE	PEACH ST	PEACH ST	Minor Arterial	Asphalt	44	70	17	359	56	70	80	Strng	Good	11	32	**59.6**
43330	3RD AVE	PEACH ST	SAINT HELENS ST	Minor Arterial	Asphalt	44	438	107	2,248	62	80	60	Mod	Good	10	28	**67**
44750	3RD AVE	SAINT HELENS ST	W ARLINGTON ST	Minor Arterial	Asphalt	44	305	75	1566	58	75	60	Mod	Good	16	26	**62.2**
45400	3RD AVE	W ARLINGTON ST	BAKER ST	Minor Arterial	Asphalt	47	156	41	855	67	90	60	Mod	V Good	8	25	**73.5**
46630	3RD AVE	BAKER ST	STEWART ST	Minor Arterial	Asphalt	43	504	120	2528	63	82	60	Mod	Good	9	28	**68**
48790	3RD AVE	STEWART ST	W NOB HILL BLVD	Minor Arterial	Asphalt	48	667	178	3735	57	69	60	Mod	Good	18	25	**59.6**
50620	3RD AVE	W NOB HILL BLVD	W PRASCH AVE	Minor Arterial	Asphalt	43	671	160	3366	48	71	60	Mod	Fair	22	28	**53.8**
52610	3RD AVE	W PRASCH AVE	W VIOLA AVE	Minor Arterial	Asphalt	51	653	185	3885	58	85	60	Mod	Good	14	28	**65.7**
54500	3RD AVE	W VIOLA AVE	W LOGAN AVE	Minor Arterial	Asphalt	52	649	187	3937	60	82	60	Mod	Good	15	24	**66.4**
56010	3RD AVE	W LOGAN AVE	W MEAD AVE	Minor Arterial	Asphalt	46	668	171	3585	56	77	60	Mod	Good	23	21	**61.7**
57730	3RD AVE	W MEAD AVE	W KING ST	Minor Arterial	Asphalt	46	674	172	3617	63	75	60	Mod	Good	14	23	**65.7**
58970	3RD AVE	W KING ST	W PIERCE ST	Minor Arterial	Asphalt	45	658	165	3455	61	83	60	Mod	Good	10	29	**67.3**
59440	3RD AVE	W PIERCE ST	PERRY ST	Minor Arterial	Asphalt	48	306	82	1714	60	77	60	Mod	Good	12	28	**64.2**
60510	3RD AVE	PERRY ST	DS@812S PERRY ST	Minor Arterial	Asphalt	47	812	212	4452	53	83	60	Mod	Good	16	31	**61.7**
61060	3RD AVE	DS@812S PERRY ST	W WASHINGTON AVE	Minor Arterial	Asphalt	52	199	57	1,207	79	59	60	Mod	V Good	4	17	**71**
3280	3RD ST	E O ST	DS@159N E O ST	Local	Asphalt	23	159	20	427	63	41	80	Strng	Fair	8	6	**55**
3140	3RD ST	DS@159N E O ST	E P ST	Local	Asphalt	22	172	21	441	89	74	60	Mod	V Good	3	8	**83**
3080	3RD ST	E P ST	DS@157N E P ST	Local	Asphalt	24	157	21	440	89	70	60	Mod	V Good	1	10	**82**
2950	3RD ST	DS@157N E P ST	E Q ST	Local	Asphalt	23	172	22	462	97	88	60	Mod	Excellent	0	3	**93**
2790	3RD ST	E Q ST	DS@156N E Q ST	Local	Asphalt	25	156	22	455	66	60	80	Strng	Good	8	5	**63**
2760	3RD ST	DS@156N E Q ST	E R ST	Local	Asphalt	24	173	23	484	89	70	60	Mod	V Good	2	9	**82**
2630	3RD ST	E R ST	DS@159N E R ST	Local	Asphalt	29	159	26	538	23	40	60	Mod	Poor	49	29	**27**
2560	3RD ST	DS@159N E R ST	E S ST	Local	Asphalt	24	173	23	484	39	71	60	Mod	Marginal	28	32	**49**
2450	3RD ST	E S ST	NORTH END	Local	Asphalt	25	450	63	1,313	82	63	60	Mod	V Good	4	14	**75**
6290	3RD ST	E I ST	E J ST	Local	Asphalt	32	322	57	1,202	76	62	60	Mod	V Good	7	17	**71**
5310	3RD ST	E J ST	E K ST	Local	Asphalt	31	339	58	1,226	75	66	60	Mod	V Good	4	21	**71**
8570	3RD ST	E G ST	E H ST	Local	Asphalt	49	503	137	2,875	36	37	80	Strng	Poor	32	32	**35**
7280	3RD ST	E H ST	E I ST	Local	Asphalt	49	518	141	2,961	76	56	60	Mod	Good	6	19	**68**
14850	3RD ST	E LINCOLN AVE	DS@189N E LINCOLN AVE	Local	Asphalt	30	189	32	662	86	67	60	Mod	V Good	2	12	**79**
13870	3RD ST	DS@189N E LINCOLN AVE	E D ST	Local	Asphalt	30	293	49	1,026	82	64	60	Mod	V Good	1	17	**75**
13020	3RD ST	E D ST	E E ST	Local	Asphalt	30	478	80	1,673	70	49	60	Mod	Good	17	13	**62**
11450	3RD ST	E E ST	E F ST	Local	Asphalt	49	480	131	2,744	78	66	60	Mod	V Good	9	13	**74**
10130	3RD ST	E F ST	E G ST	Local	Asphalt	48	478	127	2,677	41	45	60	Mod	Marginal	39	21	**41**
16810	3RD ST	E MARTIN LUTHER KING JR BLVD	E LINCOLN AVE	Local	Asphalt	49	485	132	2773	71	65	80	Strng	Good	0	29	**68.5**
21210	3RD ST	E YAKIMA AVE	DS@190N E YAKIMA AVE	Local	Asphalt	44	190	46	975	63	40	80	Strng	Fair	11	26	**54.6**
20720	3RD ST	DS@190N E YAKIMA AVE	STAFF SGT PENDLETON WAY	Local	Asphalt	43	294	70	1,475	63	50	60	Mod	Fair	19	18	**58**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
19050	3RD ST	STAFF SGT PENDLETON WAY	E MARTIN LUTHER KING JR BLVD	Local	Asphalt	44	479	117	2459	65	61	80	Strng	Good	8	27	**63**
21980	3RD ST	E YAKIMA AVE	DS@192S E YAKIMA AVE	Local	Asphalt	67	192	71	1501	61	54	80	Strng	Fair	5	34	**57.7**
23120	3RD ST	DS@192S E YAKIMA AVE	E CHESTNUT AVE	Local	Asphalt	65	298	108	2260	68	77	80	Strng	V Good	0	32	**70**
24650	3RD ST	E CHESTNUT AVE	E WALNUT ST	Local	Asphalt	66	479	176	3,688	59	57	80	Strng	Fair	7	33	**57**
27570	3RD ST	E WALNUT ST	E SPRUCE ST	Major Collector	Asphalt	59	482	158	3318	37	52	80	Strng	Marginal	27	36	**40.5**
29930	3RD ST	E SPRUCE ST	E PINE ST	Major Collector	Asphalt	48	483	129	2,705	40	65	60	Mod	Marginal	31	29	**47**
32090	3RD ST	E PINE ST	E MAPLE ST	Major Collector	Asphalt	48	479	128	2,682	52	79	60	Mod	Good	25	23	**60**
34290	3RD ST	E MAPLE ST	E BEECH ST	Major Collector	Asphalt	49	480	131	2,744	64	73	60	Mod	Good	16	21	**65**
36510	3RD ST	E BEECH ST	E RACE ST	Major Collector	Asphalt	51	479	136	2,850	66	69	60	Mod	Good	17	17	**66**
36850	3RD ST	E RACE ST	E ADAMS ST	Major Collector	Asphalt	48	168	45	941	49	53	80	Strng	Fair	17	34	**49**
39480	3RD ST	E ADAMS ST	PACIFIC AVE	Major Collector	Asphalt	38	464	98	2057	54	59	80	Strng	Fair	6	40	**54.3**
41130	3RD ST	PACIFIC AVE	S 2ND ST	Major Collector	Asphalt	36	509	102	2138	50	56	80	Strng	Fair	6	44	**50.9**
43920	3RD ST	S 2ND ST	DS@645S S 2ND ST	Major Collector	Asphalt	36	645	129	2709	70	57	80	Strng	Good	9	16	**64.2**
45100	3RD ST	DS@645S S 2ND ST	E ARLINGTON ST	Major Collector	Asphalt	42	192	45	941	57	40	80	Strng	Fair	12	31	**50**
74010	40TH AVE	FRUITVALE BLVD	US 12 HWY	Ramp	Asphalt	55	1809	553	11608	86	95	60	Mod	Excellent	3	11	**87.9**
20010	40TH AVE	W LINCOLN AVE	RICHEY RD	Truck Route	Asphalt	48	322	86	1,803	64	72	60	Mod	Good	22	14	**66**
18640	40TH AVE	RICHEY RD	RICHEY RD	Truck Route	Asphalt	44	102	25	524	74	68	60	Mod	V Good	14	12	**71**
17890	40TH AVE	RICHEY RD	MCKINLEY AVE	Truck Route	Asphalt	47	165	43	905	65	79	60	Mod	Good	21	14	**68.7**
17300	40TH AVE	MCKINLEY AVE	ENGLEWOOD AVE	Truck Route	Asphalt	48	720	192	4032	80	78	60	Mod	V Good	10	10	**78.3**
14040	40TH AVE	ENGLEWOOD AVE	DS@203N ENGLEWOOD AVE	Truck Route	Asphalt	63	203	71	1,492	81	77	60	Mod	V Good	14	5	**79**
13170	40TH AVE	DS@203N ENGLEWOOD AVE	KERN RD	Truck Route	Asphalt	54	1124	337	7081	81	84	60	Mod	V Good	11	8	**81.3**
9540	40TH AVE	KERN RD	DS@496N KERN RD	Truck Route	Asphalt	50	496	138	2,893	84	87	60	Mod	V Good	8	8	**84**
72970	40TH AVE	DS@496N KERN RD	CASTLEVALE RD	Truck Route	Asphalt	61	198	67	1,409	75	89	60	Mod	V Good	3	22	**79**
72960	40TH AVE	CASTLEVALE RD	POWERHOUSE RD	Truck Route	Asphalt	58	641	207	4,337	84	83	60	Mod	V Good	7	9	**83**
6110	40TH AVE	POWERHOUSE RD	RIVER RD	Truck Route	Asphalt	61	1,368	464	9,736	79	88	60	Mod	V Good	15	6	**82**
4100	40TH AVE	RIVER RD	DS@696N RIVER RD	Truck Route	Asphalt	62	696	240	5034	72	77	60	Mod	V Good	9	19	**72.9**
72470	40TH AVE	DS@696N RIVER RD	US 12 HWY RAMP	Truck Route	Asphalt	75	495	206	4,331	77	72	60	Mod	V Good	6	17	**74**
70550	40TH AVE	SUMMITVIEW AVE	WESTPARK ST	Truck Route	Asphalt	66	148	54	1,140	87	75	60	Mod	V Good	4	9	**82**
70560	40TH AVE	WESTPARK ST	KNOBEL AVE	Truck Route	Asphalt	51	177	50	1,053	80	68	60	Mod	V Good	6	14	**75**
24080	40TH AVE	KNOBEL AVE	AVALANCHE AVE	Truck Route	Asphalt	44	312	76	1,602	76	75	60	Mod	V Good	15	9	**75**
22910	40TH AVE	AVALANCHE AVE	COOK ST	Truck Route	Asphalt	46	176	45	945	64	63	60	Mod	Good	19	16	**62.5**
22320	40TH AVE	COOK ST	W LINCOLN AVE	Truck Route	Asphalt	47	507	132	2,780	74	71	60	Mod	V Good	12	13	**73**
32810	40TH AVE	W CHESTNUT AVE	DS@618N W CHESTNUT AVE	Truck Route	Asphalt	45	618	155	3,245	76	88	60	Mod	V Good	8	16	**79**
29670	40TH AVE	DS@618N W CHESTNUT AVE	SUMMITVIEW AVE	Truck Route	Asphalt	45	699	175	3670	76	76	60	Mod	V Good	8	16	**75.2**
35800	40TH AVE	W CHESTNUT AVE	W WALNUT ST	Truck Route	Asphalt	40	658	146	3,071	80	83	60	Mod	V Good	7	13	**80**
36910	40TH AVE	W WALNUT ST	BELL AVE	Truck Route	Asphalt	40	301	67	1405	71	84	60	Mod	V Good	15	14	**74.4**
38490	40TH AVE	BELL AVE	TIETON DR	Truck Route	Asphalt	56	363	113	2372	79	73	60	Mod	V Good	9	12	**76.3**
40150	40TH AVE	TIETON DR	MEADOW LN	Truck Route	Asphalt	51	329	93	1958	79	77	60	Mod	V Good	4	17	**77.5**
41390	40TH AVE	MEADOW LN	WEBSTER AVE	Truck Route	Asphalt	42	328	77	1607	63	81	60	Mod	Good	20	17	**68**
42520	40TH AVE	WEBSTER AVE	DS@349S WEBSTER AVE	Truck Route	Asphalt	41	349	79	1669	76	83	60	Mod	V Good	9	15	**77.5**
44220	40TH AVE	DS@349S WEBSTER AVE	W ARLINGTON ST	Truck Route	Asphalt	41	314	72	1,502	83	89	60	Mod	V Good	4	13	**84**
47130	40TH AVE	W ARLINGTON ST	DS@805S W ARLINGTON ST	Truck Route	Asphalt	40	805	179	3,757	78	86	60	Mod	V Good	7	15	**80**
48260	40TH AVE	DS@805S W ARLINGTON ST	W NOB HILL BLVD	Truck Route	Asphalt	54	524	157	3,301	73	57	60	Mod	Good	12	15	**66**
49620	40TH AVE	W NOB HILL BLVD	DS@318S W NOB HILL BLVD	Truck Route	Asphalt	54	318	95	2003	65	45	80	Strng	Fair	16	19	**57.1**
50190	40TH AVE	DS@318S W NOB HILL BLVD	DS@651S W NOB HILL BLVD	Truck Route	Asphalt	47	333	87	1,826	38	62	60	Mod	Marginal	33	29	**45**
51340	40TH AVE	DS@651S W NOB HILL BLVD	DS@981S W NOB HILL BLVD	Truck Route	Asphalt	49	330	90	1,887	42	61	60	Mod	Marginal	30	28	**47**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
52220	40TH AVE	DS@981S W NOB HILL BLVD	W VIOLA AVE	Truck Route	Asphalt	43	351	84	1,761	53	64	60	Mod	Fair	21	27	**55**
53330	40TH AVE	W VIOLA AVE	MCLEAN DR	Truck Route	Asphalt	45	226	57	1,187	43	61	60	Mod	Marginal	30	27	**47**
54330	40TH AVE	MCLEAN DR	LAURA LN	Truck Route	Asphalt	45	453	113	2,378	40	60	60	Mod	Marginal	34	26	**45**
56470	40TH AVE	LAURA LN	CREEKSIDE LP	Truck Route	Asphalt	49	747	203	4,270	40	59	60	Mod	Marginal	34	26	**45**
56900	40TH AVE	CREEKSIDE LP	LOREN PL	Truck Route	Asphalt	48	185	49	1,036	44	69	60	Mod	Fair	32	24	**51**
57630	40TH AVE	LOREN PL	CREEKSIDE LP	Truck Route	Asphalt	46	433	111	2,324	45	68	60	Mod	Fair	32	24	**51**
58300	40TH AVE	CREEKSIDE LP	W WASHINGTON AVE	Truck Route	Asphalt	46	383	98	2,055	49	67	60	Mod	Fair	27	23	**54**
24090	41ST AVE	SNOWMOUNTAIN RD	AVALANCHE AVE	Local	Asphalt	32	323	57	1206	61	30	80	Strng	Fair	12	27	**50**
22890	41ST AVE	AVALANCHE AVE	W LINCOLN AVE	Local	Asphalt	31	677	117	2448	66	55	80	Strng	Good	11	23	**61.4**
32830	41ST AVE	W CHESTNUT AVE	DS@647N W CHESTNUT AVE	Local	Asphalt	32	647	115	2415	57	44	80	Strng	Fair	12	31	**51.5**
29340	41ST AVE	DS@647N W CHESTNUT AVE	NORTH END	Local	Asphalt	38	185	39	811	56	25	80	Strng	Marginal	12	31	**45**
46300	41ST AVE	W ARLINGTON ST	DS@694S W ARLINGTON ST	Local	Asphalt	32	694	123	2,591	55	48	80	Strng	Fair	14	30	**52**
48240	41ST AVE	DS@694S W ARLINGTON ST	W NOB HILL BLVD	Local	Asphalt	35	640	124	2613	57	42	80	Strng	Fair	18	25	**50.9**
50210	41ST AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	30	663	111	2321	69	52	80	Strng	Good	9	23	**62**
51400	41ST AVE	W PRASCH AVE	STORM AVE	Local	Asphalt	29	337	54	1,140	57	56	80	Strng	Fair	11	33	**56**
52240	41ST AVE	STORM AVE	W VIOLA AVE	Local	Asphalt	31	332	57	1,201	65	41	80	Strng	Fair	4	31	**56**
14000	42ND AVE	ENGLEWOOD AVE	ESTEE CT	Local	Asphalt	32	350	62	1307	100	90	60	Mod	Excellent	0	0	**95.6**
12720	42ND AVE	ESTEE CT	ESTEE CT	Local	Asphalt	31	206	35	745	83	74	60	Mod	V Good	3	14	**79**
12250	42ND AVE	ESTEE CT	GARDEN PARK WY	Local	Asphalt	30	257	43	900	100	90	60	Mod	Excellent	0	0	**96**
20060	42ND AVE	W LINCOLN AVE	RICHEY RD	Local	Asphalt	31	327	56	1,183	76	56	80	Strng	Good	5	19	**69**
18610	42ND AVE	RICHEY RD	DOUGLAS DR	Local	Asphalt	32	320	57	1,195	65	46	80	Strng	Fair	11	24	**58**
24210	42ND AVE	SNOWMOUNTAIN RD	AVALANCHE AVE	Local	Asphalt	31	336	58	1,215	85	66	60	Mod	V Good	0	15	**78**
22940	42ND AVE	AVALANCHE AVE	UPLANDS WY	Local	Asphalt	33	338	62	1,301	86	78	60	Mod	V Good	0	14	**83**
21660	42ND AVE	UPLANDS WY	W LINCOLN AVE	Local	Asphalt	32	341	61	1,273	78	62	60	Mod	V Good	3	19	**72**
32910	42ND AVE	W CHESTNUT AVE	WEST WY	Local	Asphalt	28	203	32	663	68	48	80	Strng	Good	12	20	**60**
31450	42ND AVE	WEST WY	BARGE ST	Local	Asphalt	26	305	44	925	66	70	60	Mod	Good	10	24	**66**
30140	42ND AVE	BARGE ST	MARYLIN DR	Local	Asphalt	25	442	61	1,289	59	55	60	Mod	Fair	19	21	**57**
28290	42ND AVE	MARYLIN DR	SUMMITVIEW AVE	Local	Asphalt	30	435	73	1,523	69	44	80	Strng	Good	10	21	**60**
46070	42ND AVE	W ARLINGTON ST	DS@656S W ARLINGTON ST	Local	Asphalt	26	656	95	1,990	47	49	80	Strng	Marginal	27	27	**46**
48310	42ND AVE	DS@656S W ARLINGTON ST	W NOB HILL BLVD	Local	Asphalt	20	678	75	1,582	56	42	80	Strng	Fair	18	26	**50**
49840	42ND AVE	W NOB HILL BLVD	SOUTH END	Local	Asphalt	34	416	79	1,654	50	50	80	Strng	Fair	13	15	**49**
53950	42ND AVE	W VIOLA AVE	ALLER ST	Local	Asphalt	30	517	86	1,810	71	61	80	Strng	Good	0	29	**67**
11560	43RD AVE	DS@113N MADERA WY	GARDEN PARK WY	Local	Asphalt	30	102	17	357	78	59	60	Mod	V Good	4	18	**71**
12130	43RD AVE	MADERA WY	DS@113N MADERA WY	Local	Asphalt	30	113	19	396	72	73	80	Strng	V Good	0	28	**71.5**
49530	43RD AVE	W NOB HILL BLVD	DS@188S W NOB HILL BLVD	Local	Asphalt	30	188	31	658	72	55	80	Strng	Good	3	24	**66**
50180	43RD AVE	DS@188S W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	29	445	72	1,506	77	65	60	Mod	V Good	5	18	**72**
51390	43RD AVE	NORTH END	STORM AVE	Local	Asphalt	37	278	57	1,204	66	44	80	Strng	Fair	8	25	**58**
52260	43RD AVE	STORM AVE	W VIOLA AVE	Local	Asphalt	30	327	55	1145	51	49	80	Strng	Fair	8	41	**49.1**
53930	43RD AVE	W VIOLA AVE	ALLER ST	Local	Asphalt	29	517	83	1,749	70	68	60	Mod	Good	9	21	**69**
54180	43RD AVE	ALLER ST	SOUTH END	Local	Asphalt	31	85	15	307	82	63	60	Mod	V Good	3	15	**75**
13960	44TH AVE	ENGLEWOOD AVE	MADERA WY	Local	Asphalt	39	586	127	2,666	72	56	60	Mod	Good	17	12	**65**
12170	44TH AVE	MADERA WY	GARDEN PARK WY	Local	Asphalt	26	308	44	934	80	61	60	Mod	V Good	6	13	**73**
10970	44TH AVE	GARDEN PARK WY	NORTH END	Local	Asphalt	20	182	20	425	100	90	60	Mod	Excellent	0	0	**95.6**
20160	44TH AVE	W LINCOLN AVE	RICHEY RD	Local	Asphalt	31	330	57	1,194	35	49	80	Strng	Poor	33	32	**38**
18590	44TH AVE	RICHEY RD	DOUGLAS DR	Local	Asphalt	32	330	59	1232	28	63	60	Mod	Poor	39	33	**38.1**
16920	44TH AVE	DOUGLAS DR	BENJAMIN DR	Local	Asphalt	31	330	57	1194	32	61	60	Mod	Marginal	37	31	**40.2**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
15760	44TH AVE	BENJAMIN DR	ENGLEWOOD AVE	Local	Asphalt	31	330	57	1194	30	41	80	Strng	Poor	40	29	**33.1**
26040	44TH AVE	SUMMITVIEW AVE	SNOWMOUNTAIN RD	Local	Asphalt	39	307	67	1397	80	61	80	Strng	V Good	0	20	**73.1**
24250	44TH AVE	SNOWMOUNTAIN RD	AVALANCHE AVE	Local	Asphalt	41	340	77	1626	53	44	80	Strng	Marginal	21	27	**48.5**
22900	44TH AVE	AVALANCHE AVE	UPLANDS WY	Local	Asphalt	38	337	71	1494	58	48	80	Strng	Fair	18	24	**53.8**
32960	44TH AVE	S 44TH AVE	W BARGE ST	Local	Asphalt	24	283	38	792	68	44	80	Strng	Good	11	21	**59.3**
75530	44TH AVE	W BARGE ST	NORTH END	Local	Asphalt	34	206	39	829	64	51	80	Strng	Good	5	30	**59**
75520	44TH AVE	N 44TH AVE	W CHESTNUT AVE	Local	Asphalt	22	362	44	929	76	69	60	Mod	V Good	5	20	**73**
37050	44TH AVE	W WALNUT ST	BELL AVE	Local	Asphalt	29	307	49	1,039	68	57	80	Strng	Good	1	31	**64**
38530	44TH AVE	BELL AVE	TIETON DR	Local	Asphalt	29	351	57	1,188	68	44	80	Strng	Good	7	25	**59**
41350	44TH AVE	TIETON DR	WEBSTER AVE	Local	Asphalt	38	652	138	2,891	97	88	60	Mod	Excellent	0	3	**93**
42040	44TH AVE	WEBSTER AVE	DS@109S WEBSTER AVE	Local	Asphalt	39	109	24	496	99	90	60	Mod	Excellent	0	1	**95**
42940	44TH AVE	DS@109S WEBSTER AVE	DS@410S WEBSTER AVE	Local	Asphalt	37	301	62	1,299	98	89	60	Mod	Excellent	0	2	**94**
44270	44TH AVE	DS@410S WEBSTER AVE	W ARLINGTON ST	Local	Asphalt	38	260	55	1,153	97	88	60	Mod	Excellent	0	3	**93**
48470	44TH AVE	W ARLINGTON ST	W NOB HILL BLVD	Local	Asphalt	42	1,344	314	6,586	91	71	60	Mod	V Good	0	9	**84**
50240	44TH AVE	W NOB HILL BLVD	DS@657S W NOB HILL BLVD	Local	Asphalt	22	657	80	1,686	71	48	80	Strng	Good	6	23	**62**
51310	44TH AVE	DS@657S W NOB HILL BLVD	DS@895S W NOB HILL BLVD	Local	Asphalt	22	238	29	611	74	54	60	Mod	Good	8	18	**66**
51350	44TH AVE	DS@895S W NOB HILL BLVD	DS@970S W NOB HILL BLVD	Local	Asphalt	22	75	9	193	76	56	80	Strng	Good	0	24	**69**
52300	44TH AVE	DS@970S W NOB HILL BLVD	W VIOLA AVE	Local	Asphalt	23	346	44	928	77	58	80	Strng	V Good	1	22	**70**
54210	44TH AVE	W VIOLA AVE	DS@636S W VIOLA AVE	Local	Asphalt	30	636	106	2,226	73	57	80	Strng	Good	6	21	**67**
55370	44TH AVE	DS@636S W VIOLA AVE	SOUTH END	Local	Asphalt	28	510	79	1,666	81	62	60	Mod	V Good	11	9	**74**
16930	45TH AVE	DOUGLAS DR	ENGLEWOOD AVE	Local	Asphalt	30	662	110	2,317	66	39	80	Strng	Fair	14	20	**56**
30920	45TH AVE	S 45TH AVE	DS@134N S 45TH AVE	Local	Asphalt	20	134	15	313	100	90	60	Mod	Excellent	0	0	**96**
30340	45TH AVE	DS@134N S 45TH AVE	W BARGE ST	Local	Asphalt	24	183	24	512	66	44	60	Mod	Fair	21	13	**57.4**
29810	45TH AVE	W BARGE ST	ALPINE WY	Local	Asphalt	37	478	98	2063	66	40	60	Mod	Fair	18	16	**56.3**
27100	45TH AVE	ALPINE WY	SUMMITVIEW AVE	Local	Asphalt	27	186	28	586	82	64	60	Mod	V Good	6	12	**75**
32750	45TH AVE	N 45TH AVE	W CHESTNUT AVE	Local	Asphalt	19	326	34	723	44	31	80	Strng	Poor	34	22	**38.4**
34360	45TH AVE	W CHESTNUT AVE	DRAKE DR	Local	Asphalt	30	352	59	1232	46	43	80	Strng	Marginal	21	33	**43.8**
35930	45TH AVE	DRAKE DR	W WALNUT ST	Local	Asphalt	29	309	50	1,045	34	36	80	Strng	Poor	29	37	**33**
38570	45TH AVE	W WALNUT ST	TIETON DR	Local	Asphalt	30	660	110	2310	54	36	80	Strng	Marginal	16	30	**47**
41370	45TH AVE	TIETON DR	WEBSTER AVE	Local	Asphalt	34	652	123	2586	35	53	80	Strng	Marginal	29	36	**39.9**
42500	45TH AVE	WEBSTER AVE	DS@332S WEBSTER AVE	Local	Asphalt	34	332	63	1317	25	47	80	Strng	Poor	32	43	**31.1**
44260	45TH AVE	DS@332S WEBSTER AVE	W ARLINGTON ST	Local	Asphalt	33	335	61	1,290	32	46	80	Strng	Poor	36	32	**36**
50600	45TH AVE	S 46TH AVE	FAIRBROOK DR	Local	Asphalt	31	629	108	2,275	64	49	80	Strng	Fair	7	29	**58**
51860	45TH AVE	FAIRBROOK DR	S 46TH AVE	Local	Asphalt	31	501	86	1,812	64	36	80	Strng	Fair	9	27	**54**
10960	46TH AVE	MODESTO WY	CONESTOGA BLVD	Local	Asphalt	30	320	53	1120	94	83	60	Mod	Excellent	6	0	**89.4**
12200	46TH AVE	MATTHEWS PL	NORTH END	Local	Asphalt	30	112	19	392	78	58	60	Mod	V Good	4	18	**70.2**
12740	46TH AVE	MATTHEWS PL	KIMBERLY PL	Local	Asphalt	31	232	40	839	81	63	60	Mod	V Good	6	13	**74.2**
13930	46TH AVE	KIMBERLY PL	ENGLEWOOD AVE	Local	Asphalt	29	343	55	1160	78	59	60	Mod	V Good	12	10	**70.9**
20130	46TH AVE	W LINCOLN AVE	RICHEY RD	Local	Asphalt	31	310	53	1121	33	46	80	Strng	Poor	37	30	**36.3**
18780	46TH AVE	RICHEY RD	DOUGLAS DR	Local	Asphalt	31	350	60	1,266	36	43	80	Strng	Poor	31	33	**37**
23530	46TH AVE	SNOWMOUNTAIN RD	AVALANCHE AVE	Local	Asphalt	31	341	59	1,233	72	64	60	Mod	Good	16	12	**68**
22400	46TH AVE	AVALANCHE AVE	UPLANDS WY	Local	Asphalt	31	192	33	694	83	64	60	Mod	V Good	0	17	**76**
21620	46TH AVE	UPLANDS WY	W LINCOLN AVE	Local	Asphalt	32	339	60	1,266	49	52	60	Mod	Marginal	27	24	**49**
28400	46TH AVE	SOUTH END	SUMMITVIEW AVE	Local	Asphalt	32	493	88	1,841	56	51	80	Strng	Fair	11	33	**54**
30700	46TH AVE	S 46TH AVE	DS@99N S 46TH AVE	Local	Asphalt	31	99	17	358	73	62	80	Strng	Good	5	22	**68.7**
30400	46TH AVE	DS@99N S 46TH AVE	NORTH END	Local	Asphalt	30	182	30	637	60	41	80	Strng	Fair	8	32	**53**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
33050	46TH AVE	N 46TH AVE	W CHESTNUT AVE	Local	Asphalt	31	354	61	1280	64	49	80	Strng	Fair	11	25	**58.2**
35950	46TH AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	28	655	102	2,140	65	59	80	Strng	Good	6	28	**62**
38640	46TH AVE	W WALNUT ST	TIETON DR	Local	Asphalt	30	663	111	2,321	65	57	80	Strng	Good	9	26	**62**
42310	46TH AVE	WEBSTER AVE	BRISTOL WY	Local	Asphalt	31	194	33	702	67	65	80	Strng	Good	3	29	**66**
43820	46TH AVE	BRISTOL WY	GLENMOOR CIR	Local	Asphalt	22	315	39	809	66	58	80	Strng	Good	9	25	**63**
49550	46TH AVE	W NOB HILL BLVD	S 45TH AVE	Local	Asphalt	36	240	48	1,008	69	44	80	Strng	Good	10	21	**60**
49710	46TH AVE	S 45TH AVE	S 46TH PL	Local	Asphalt	35	101	20	412	71	50	80	Strng	Good	6	23	**63**
50150	46TH AVE	S 46TH PL	S 46TH PL	Local	Asphalt	30	325	54	1,138	66	40	80	Strng	Fair	9	25	**56**
50310	46TH AVE	S 46TH PL	DS@118S S 46TH PL	Local	Asphalt	29	118	19	399	65	49	80	Strng	Fair	10	25	**59**
51280	46TH AVE	DS@118S S 46TH PL	S 46TH PL	Local	Asphalt	29	170	27	575	35	41	80	Strng	Poor	31	34	**36**
51380	46TH AVE	S 46TH PL	FAIRBROOK DR	Local	Asphalt	30	156	26	546	62	35	80	Strng	Fair	11	27	**52**
51620	46TH AVE	FAIRBROOK DR	S 46TH PL	Local	Asphalt	31	140	24	506	65	53	80	Strng	Good	0	35	**60.1**
51870	46TH AVE	S 46TH PL	VIOLA PL	Local	Asphalt	30	121	20	424	64	36	80	Strng	Fair	4	32	**54**
50160	46TH PL	S 46TH AVE	S 46TH AVE	Local	Asphalt	30	444	74	1,554	68	43	80	Strng	Fair	4	28	**59**
51630	46TH PL	S 46TH AVE	S 46TH AVE	Local	Asphalt	30	406	68	1421	60	43	80	Strng	Fair	16	24	**53.2**
13910	47TH AVE	ENGLEWOOD AVE	DS@569N ENGLEWOOD AVE	Local	Asphalt	34	569	107	2,257	95	85	60	Mod	Excellent	5	0	**91**
72620	47TH AVE	DS@569N ENGLEWOOD AVE	MODESTO WY	Local	Asphalt	30	325	54	1138	86	67	60	Mod	V Good	14	0	**78.8**
36070	47TH AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	29	660	106	2,233	65	55	80	Strng	Good	9	27	**61**
38660	47TH AVE	W WALNUT ST	TIETON DR	Local	Asphalt	29	657	106	2223	65	47	80	Strng	Fair	12	23	**58.2**
43860	47TH AVE	BRISTOL WY	GLENMOOR CIR	Local	Asphalt	21	176	21	431	58	44	80	Strng	Fair	11	31	**52.3**
13880	48TH AVE	ENGLEWOOD AVE	CREST CIR	Major Collector	Asphalt	37	156	32	673	94	83	60	Mod	Excellent	6	0	**89.4**
13200	48TH AVE	CREST CIR	CREST CIR	Major Collector	Asphalt	32	338	60	1,262	95	85	60	Mod	Excellent	5	0	**91**
12350	48TH AVE	CREST CIR	MADERA WY	Major Collector	Asphalt	36	143	29	601	87	68	60	Mod	V Good	13	0	**80**
72600	48TH AVE	MADERA WY	MODESTO WY	Major Collector	Asphalt	40	282	63	1,316	100	90	60	Mod	Excellent	0	0	**96**
72570	48TH AVE	MODESTO WY	DS@134N MODESTO WY	Major Collector	Asphalt	36	134	27	563	100	90	60	Mod	Excellent	0	0	**96**
10440	48TH AVE	DS@134N MODESTO WY	CONESTOGA BLVD	Major Collector	Asphalt	33	156	29	601	100	90	60	Mod	Excellent	0	0	**95.6**
10050	48TH AVE	CONESTOGA BLVD	VIEWLAND DR	Major Collector	Asphalt	33	223	41	859	100	90	60	Mod	Excellent	0	0	**96**
9100	48TH AVE	VIEWLAND DR	WEBSTER RD	Major Collector	Asphalt	33	256	47	986	100	90	60	Mod	Excellent	0	0	**96**
70590	48TH AVE	WEBSTER RD	SURREY LN	Major Collector	Asphalt	37	223	46	963	71	48	60	Mod	Good	29	0	**62**
33020	48TH AVE	S 48TH AVE	BARGE ST	Major Collector	Asphalt	31	657	113	2376	48	52	60	Mod	Marginal	28	24	**48.2**
29370	48TH AVE	BARGE ST	SUMMITVIEW AVE	Major Collector	Asphalt	38	659	139	2,922	39	53	80	Strng	Marginal	30	31	**43**
34120	48TH AVE	W CHESTNUT AVE	MCCARGAR ST	Major Collector	Asphalt	26	268	39	813	61	74	60	Mod	Good	22	17	**64**
36150	48TH AVE	MCCARGAR ST	W WALNUT ST	Major Collector	Asphalt	30	403	67	1,411	73	81	60	Mod	V Good	12	15	**75**
38580	48TH AVE	W WALNUT ST	TIETON DR	Major Collector	Asphalt	35	646	126	2,638	52	63	60	Mod	Fair	25	23	**54**
40020	48TH AVE	TIETON DR	DS@251S TIETON DR	Major Collector	Asphalt	36	251	50	1,054	98	89	60	Mod	Excellent	0	2	**95**
40330	48TH AVE	DS@251S TIETON DR	DS@378S TIETON DR	Major Collector	Asphalt	36	127	25	533	95	95	60	Mod	Excellent	0	5	**94**
41410	48TH AVE	DS@378S TIETON DR	BONNIE LN	Major Collector	Asphalt	31	298	51	1,078	85	74	60	Mod	V Good	14	2	**81**
42350	48TH AVE	BONNIE LN	DS@226S BONNIE LN	Major Collector	Asphalt	32	226	40	844	98	89	60	Mod	Excellent	0	2	**94**
42730	48TH AVE	DS@226S BONNIE LN	BRISTOL WY	Major Collector	Asphalt	33	131	24	504	95	85	60	Mod	Excellent	5	0	**91**
44450	48TH AVE	BRISTOL WY	W ARLINGTON ST	Major Collector	Asphalt	29	309	50	1,045	73	88	30	Weak	V Good	21	6	**77**
45760	48TH AVE	W ARLINGTON ST	GLENSIDE CT	Major Collector	Asphalt	31	432	74	1562	99	90	60	Mod	Excellent	0	1	**95.2**
48500	48TH AVE	GLENSIDE CT	W NOB HILL BLVD	Major Collector	Asphalt	39	889	193	4045	91	73	60	Mod	Excellent	4	5	**84.4**
49670	48TH AVE	W NOB HILL BLVD	COWDEN PL	Major Collector	Asphalt	43	313	75	1,570	76	56	80	Strng	Good	4	20	**69**
50140	48TH AVE	COWDEN PL	W PRASCH AVE	Major Collector	Asphalt	36	258	52	1,084	79	76	60	Mod	V Good	3	19	**77**
51160	48TH AVE	W PRASCH AVE	CLINTON WY	Major Collector	Asphalt	31	256	44	926	81	72	60	Mod	V Good	0	20	**77**
51640	48TH AVE	CLINTON WY	CAROL AVE	Major Collector	Asphalt	30	258	43	903	74	78	60	Mod	V Good	4	22	**74**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
53230	48TH AVE	CAROL AVE	W VIOLA AVE	Major Collector	Asphalt	32	377	67	1,407	59	57	60	Mod	Fair	18	23	**57**
53740	48TH AVE	W VIOLA AVE	CASTLEVIEW DR	Major Collector	Asphalt	30	277	46	970	60	62	60	Mod	Good	20	20	**60**
57270	48TH AVE	CASTLEVIEW DR	W WASHINGTON AVE	Major Collector	Asphalt	32	1530	272	5712	59	72	60	Mod	Good	14	27	**62.2**
18080	49TH AVE	W LINCOLN AVE	RICHEY RD	Local	Asphalt	31	310	53	1121	46	41	80	Strng	Marginal	28	26	**43.2**
16770	49TH AVE	RICHEY RD	DOUGLAS DR	Local	Asphalt	31	298	51	1078	40	42	80	Strng	Marginal	32	28	**39.6**
15670	49TH AVE	DOUGLAS DR	ENGLEWOOD AVE	Local	Asphalt	32	333	59	1,243	35	35	80	Strng	Poor	39	27	**34**
32980	49TH AVE	W CHESTNUT AVE	BARGE ST	Local	Asphalt	20	660	73	1,540	46	67	60	Mod	Fair	31	19	**52**
29300	49TH AVE	BARGE ST	SUMMITVIEW AVE	Local	Asphalt	27	659	99	2,076	44	58	60	Mod	Marginal	30	14	**47**
36050	49TH AVE	MCCARGAR ST	DS@392S MCCARGAR ST	Local	Asphalt	28	392	61	1,281	72	49	80	Strng	Good	6	22	**64**
38600	49TH AVE	DS@392S MCCARGAR ST	TIETON DR	Local	Asphalt	30	656	109	2,296	64	64	80	Strng	Good	8	28	**63**
42710	49TH AVE	NORTH END	BRISTOL WY	Local	Asphalt	46	115	29	619	63	36	80	Strng	Fair	11	26	**53**
45740	49TH AVE	W ARLINGTON ST	GLENSIDE CT	Local	Asphalt	33	433	79	1,667	50	61	80	Strng	Fair	6	44	**53**
47890	49TH AVE	GLENSIDE CT	S 50TH AVE	Local	Asphalt	34	895	169	3,550	64	73	80	Strng	Good	2	33	**66**
54190	49TH PL	CASTLEVIEW DR	SOUTH END	Local	Asphalt	39	186	40	845	68	43	80	Strng	Fair	11	21	**59**
19090	4TH AVE	W LINCOLN AVE	W D ST	Local	Asphalt	58	487	157	3,295	73	51	60	Mod	Good	11	16	**65**
16830	4TH AVE	W D ST	DS@322N W D ST	Local	Asphalt	58	322	104	2,179	69	45	80	Strng	Good	11	20	**60**
15810	4TH AVE	DS@322N W D ST	CHERRY AVE	Local	Asphalt	31	371	64	1,342	73	52	60	Mod	Good	11	16	**65**
14550	4TH AVE	CHERRY AVE	DS@172N CHERRY AVE	Local	Asphalt	23	172	22	462	86	67	60	Mod	V Good	1	13	**79.1**
13430	4TH AVE	DS@172N CHERRY AVE	FAIRBANKS AVE	Local	Asphalt	25	174	24	508	88	69	60	Mod	V Good	1	11	**81.2**
12880	4TH AVE	FAIRBANKS AVE	POPLAR ST	Local	Asphalt	25	426	59	1243	72	50	80	Strng	Good	8	19	**64**
11490	4TH AVE	POPLAR ST	WILLOW ST	Local	Asphalt	25	545	76	1590	79	60	60	Mod	V Good	6	15	**71.9**
9920	4TH AVE	WILLOW ST	QUINCE ST	Local	Asphalt	30	486	81	1701	78	59	60	Mod	V Good	7	14	**70.9**
8370	4TH AVE	QUINCE ST	W I ST	Local	Asphalt	23	856	109	2,297	70	51	60	Mod	Good	14	15	**63**
21250	4TH AVE	W MARTIN LUTHER KING JR BLVD	W LINCOLN AVE	Local	Asphalt	36	477	95	2,003	86	72	60	Mod	V Good	0	14	**80**
24700	4TH AVE	W YAKIMA AVE	DS@190N W YAKIMA AVE	Local	Asphalt	55	190	58	1,219	85	67	60	Mod	V Good	0	15	**78**
24050	4TH AVE	DS@190N W YAKIMA AVE	W A ST	Local	Asphalt	42	303	71	1485	96	87	60	Mod	Excellent	1	3	**92.1**
23010	4TH AVE	W A ST	W MARTIN LUTHER KING JR BLVD	Local	Asphalt	36	479	96	2,012	90	80	60	Mod	Excellent	5	5	**86**
26070	4TH AVE	W YAKIMA AVE	DS@189S W YAKIMA AVE	Local	Asphalt	68	189	71	1,499	48	44	80	Strng	Marginal	13	40	**46**
27620	4TH AVE	DS@189S W YAKIMA AVE	W CHESTNUT AVE	Local	Asphalt	68	301	114	2388	50	58	80	Strng	Fair	8	42	**51.5**
29980	4TH AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	67	482	179	3,768	49	49	80	Strng	Marginal	7	44	**48**
32120	4TH AVE	W WALNUT ST	W SPRUCE ST	Local	Asphalt	57	479	152	3,185	92	83	60	Mod	Excellent	4	4	**88**
34340	4TH AVE	W SPRUCE ST	W PINE ST	Local	Asphalt	58	479	154	3241	95	85	60	Mod	Excellent	1	4	**91**
36530	4TH AVE	W PINE ST	TIETON DR	Local	Asphalt	37	479	98	2,068	79	80	60	Mod	V Good	8	14	**78**
39300	4TH AVE	TIETON DR	DIVISION ST	Local	Asphalt	59	620	203	4,268	89	78	60	Mod	Excellent	1	10	**85**
40950	4TH AVE	QUEEN ANNE BLVD	PEACH ST	Local	Asphalt	28	147	23	480	93	81	60	Mod	Excellent	0	7	**88**
43360	4TH AVE	PEACH ST	SAINT HELENS ST	Local	Asphalt	28	510	79	1,666	84	71	60	Mod	V Good	6	10	**79**
45370	4TH AVE	SAINT HELENS ST	BAKER ST	Local	Asphalt	27	460	69	1449	90	71	60	Mod	V Good	0	9	**83.4**
46560	4TH AVE	BAKER ST	STEWART ST	Local	Asphalt	30	502	84	1,757	87	69	60	Mod	V Good	0	13	**80**
47380	4TH AVE	STEWART ST	SOUTH END	Local	Asphalt	20	315	35	735	47	59	80	Strng	Fair	16	37	**50**
50730	4TH AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	31	676	116	2,445	68	43	80	Strng	Fair	15	17	**59**
52730	4TH AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	31	656	113	2,373	42	34	80	Strng	Poor	28	30	**38**
54490	4TH AVE	W VIOLA AVE	W LOGAN AVE	Local	Asphalt	30	639	107	2,237	54	40	60	Mod	Marginal	26	20	**48**
56000	4TH AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	31	670	115	2,423	65	42	80	Strng	Fair	13	23	**56**
57750	4TH AVE	W MEAD AVE	W KING ST	Local	Asphalt	30	676	113	2,366	100	90	60	Mod	Excellent	0	0	**96**
58910	4TH AVE	W KING ST	W PIERCE ST	Local	Asphalt	29	653	105	2,209	100	90	60	Mod	Excellent	0	0	**96**
61080	4TH AVE	NORTH END	W WASHINGTON AVE	Local	Asphalt	23	643	82	1,725	83	64	60	Mod	V Good	1	16	**76**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
5930	4TH ST	E I ST	E J ST	Local	Asphalt	32	322	57	1,202	51	54	60	Mod	Fair	26	23	**51**
5320	4TH ST	E J ST	E K ST	Local	Asphalt	31	339	58	1,226	66	74	60	Mod	Good	13	21	**68**
4830	4TH ST	E K ST	MURPHY LN	Local	Asphalt	30	196	33	686	63	62	60	Mod	Good	13	24	**61**
4600	4TH ST	MURPHY LN	THORNTON LN	Local	Asphalt	31	291	50	1,052	64	53	80	Strng	Good	11	26	**59**
4320	4TH ST	THORNTON LN	ERICKSON LN	Local	Asphalt	32	184	33	687	65	54	60	Mod	Good	20	15	**60**
3830	4TH ST	ERICKSON LN	DS@322N ERICKSON LN	Local	Asphalt	31	322	55	1,165	48	21	80	Strng	Poor	27	25	**38**
3630	4TH ST	DS@322N ERICKSON LN	DS@654N ERICKSON LN	Local	Asphalt	32	331	59	1,236	50	62	60	Mod	Fair	23	27	**53**
3420	4TH ST	DS@654N ERICKSON LN	E O ST	Local	Asphalt	42	159	37	779	55	56	80	Strng	Fair	11	34	**55**
3300	4TH ST	E O ST	DS@159N E O ST	Local	Asphalt	37	159	33	686	63	62	80	Strng	Good	3	34	**62**
3130	4TH ST	DS@159N E O ST	E P ST	Local	Asphalt	33	168	31	647	60	69	60	Mod	Good	12	28	**62**
3060	4TH ST	E P ST	DS@158N E P ST	Local	Asphalt	21	158	18	387	67	65	80	Strng	Good	7	25	**65.9**
2960	4TH ST	DS@158N E P ST	E Q ST	Local	Asphalt	22	176	22	452	57	62	80	Strng	Fair	13	30	**57**
2830	4TH ST	E Q ST	DS@159N E Q ST	Local	Asphalt	34	159	30	631	71	78	80	Strng	V Good	0	29	**73**
2750	4TH ST	DS@159N E Q ST	E R ST	Local	Asphalt	24	167	22	468	63	35	80	Strng	Fair	10	27	**53**
2680	4TH ST	E R ST	DS@166N E R ST	Local	Asphalt	24	166	22	465	59	44	60	Mod	Fair	21	20	**53**
2550	4TH ST	DS@166N E R ST	E S ST	Local	Asphalt	29	159	26	538	76	59	60	Mod	V Good	7	17	**69**
2470	4TH ST	E S ST	DS@345N E S ST	Local	Asphalt	33	345	63	1,328	65	58	60	Mod	Good	12	22	**62**
2330	4TH ST	DS@345N E S ST	NORTH END	Local	Asphalt	23	112	14	301	91	71	60	Mod	V Good	0	9	**84**
8330	4TH ST	E G ST	E H ST	Local	Asphalt	47	500	131	2,742	73	52	60	Mod	Good	14	13	**65**
7030	4TH ST	E H ST	E I ST	Local	Asphalt	50	386	107	2,252	76	58	60	Mod	Good	14	11	**69**
14650	4TH ST	E LINCOLN AVE	E D ST	Local	Asphalt	29	484	78	1638	72	63	80	Strng	Good	2	26	**68.2**
12530	4TH ST	E D ST	E E ST	Local	Asphalt	39	476	103	2,166	80	61	60	Mod	V Good	4	16	**73**
11050	4TH ST	E E ST	E F ST	Local	Asphalt	37	480	99	2,072	59	44	80	Strng	Fair	20	21	**53**
9460	4TH ST	E F ST	E G ST	Local	Asphalt	35	477	93	1,948	41	42	80	Strng	Marginal	29	30	**40**
16330	4TH ST	E MARTIN LUTHER KING JR BLVD	E LINCOLN AVE	Local	Asphalt	52	483	140	2,930	54	48	80	Strng	Fair	6	40	**51**
18410	4TH ST	STAFF SGT PENDLETON WAY	E MARTIN LUTHER KING JR BLVD	Local	Asphalt	32	481	86	1,796	48	51	80	Strng	Marginal	15	36	**48**
21340	4TH ST	E YAKIMA AVE	DS@187S E YAKIMA AVE	Local	Asphalt	53	187	55	1156	81	63	60	Mod	V Good	0	19	**74.2**
22510	4TH ST	DS@187S E YAKIMA AVE	E CHESTNUT AVE	Local	Asphalt	52	302	87	1,832	54	53	80	Strng	Fair	9	37	**53**
24190	4TH ST	E CHESTNUT AVE	E WALNUT ST	Local	Asphalt	60	478	159	3,346	50	48	80	Strng	Marginal	14	36	**49**
26920	4TH ST	E WALNUT ST	E SPRUCE ST	Local	Composite	28	477	74	1558	85	67	60	Mod	V Good	5	11	**78.1**
29060	4TH ST	E SPRUCE ST	E PINE ST	Local	Composite	26	488	70	1,480	99	90	60	Mod	Excellent	0	1	**95**
31360	4TH ST	E PINE ST	E MAPLE ST	Local	Composite	27	479	72	1,509	99	90	60	Mod	Excellent	0	1	**95**
33970	4TH ST	E MAPLE ST	E BEECH ST	Local	Composite	30	475	79	1,663	100	90	60	Mod	Excellent	0	1	**95**
35890	4TH ST	E BEECH ST	E RACE ST	Local	Composite	29	484	78	1,638	97	88	60	Mod	Excellent	0	3	**93**
36890	4TH ST	E RACE ST	E ADAMS ST	Local	Composite	28	298	46	973	98	89	60	Mod	Excellent	0	2	**94**
39510	4TH ST	E ADAMS ST	PACIFIC AVE	Local	Asphalt	31	462	80	1,671	79	63	60	Mod	V Good	6	14	**73**
10800	50TH AVE	MODESTO WY	DS@307N MODESTO WY	Local	Asphalt	36	307	61	1289	69	58	80	Strng	Good	7	23	**64.7**
25770	50TH AVE	SUMMITVIEW AVE	PRESTIGE CT	Local	Asphalt	30	363	61	1,271	57	51	80	Strng	Fair	17	27	**54**
23970	50TH AVE	PRESTIGE CT	NORTH END	Local	Asphalt	34	300	56	1,174	59	53	80	Strng	Fair	15	26	**56**
32760	50TH AVE	W CHESTNUT AVE	CHERRY PARK DR	Truck Route	Asphalt	31	148	25	535	63	48	80	Strng	Fair	5	32	**56.9**
31810	50TH AVE	CHERRY PARK DR	APPLE BLOSSOM CT	Truck Route	Asphalt	30	232	39	812	64	44	80	Strng	Fair	16	20	**56.3**
30560	50TH AVE	APPLE BLOSSOM CT	PEAR TREE DR	Truck Route	Asphalt	30	228	38	798	58	40	80	Strng	Fair	15	27	**50.6**
29720	50TH AVE	PEAR TREE DR	SUMMITVIEW AVE	Truck Route	Asphalt	30	714	119	2499	42	48	80	Strng	Marginal	25	33	**42.9**
34200	50TH AVE	W CHESTNUT AVE	MCCARGAR ST	Local	Asphalt	29	295	48	998	59	43	80	Strng	Fair	11	31	**52.6**
35680	50TH AVE	MCCARGAR ST	W WALNUT ST	Local	Asphalt	29	362	58	1,225	33	46	80	Strng	Poor	33	34	**37**
38430	50TH AVE	W WALNUT ST	TIETON DR	Local	Asphalt	29	663	107	2,243	66	63	60	Mod	Good	10	23	**64**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
42700	50TH AVE	NORTH END	BRISTOL WY	Local	Asphalt	34	330	62	1309	73	64	80	Strng	V Good	0	27	**69.1**
43640	50TH AVE	BRISTOL WY	SOUTH END	Local	Asphalt	34	129	24	512	75	68	80	Strng	V Good	0	25	**72**
44410	50TH AVE	NORTH END	W ARLINGTON ST	Local	Asphalt	50	123	34	718	71	48	80	Strng	Good	11	18	**62.2**
45730	50TH AVE	W ARLINGTON ST	GLENSIDE CT	Local	Asphalt	34	434	82	1722	69	60	80	Strng	Good	2	28	**65.2**
47900	50TH AVE	GLENSIDE CT	S 49TH AVE	Local	Asphalt	34	909	172	3,606	64	79	60	Mod	Good	7	30	**68**
48430	50TH AVE	S 49TH AVE	W NOB HILL BLVD	Local	Asphalt	38	96	20	426	66	38	80	Strng	Fair	14	21	**56**
38410	51ST AVE	W WALNUT ST	TIETON DR	Local	Asphalt	32	658	117	2457	100	90	60	Mod	Excellent	0	0	**95.6**
45990	51ST AVE	W ARLINGTON ST	DS@594S W ARLINGTON ST	Local	Asphalt	29	594	96	2,010	53	46	80	Strng	Fair	15	32	**49**
48370	51ST AVE	DS@594S W ARLINGTON ST	W NOB HILL BLVD	Local	Asphalt	29	733	118	2,480	28	45	60	Mod	Poor	45	27	**33**
19940	52ND AVE	W LINCOLN AVE	RICHEY RD	Local	Asphalt	32	298	53	1113	79	60	60	Mod	V Good	6	15	**72.1**
18690	52ND AVE	RICHEY RD	GLACIER WY	Local	Asphalt	31	369	64	1335	81	63	60	Mod	V Good	6	14	**73.9**
16780	52ND AVE	GLACIER WY	DOUGLAS DR	Local	Asphalt	33	327	60	1259	81	63	60	Mod	V Good	3	17	**73.9**
15580	52ND AVE	DOUGLAS DR	ENGLEWOOD AVE	Local	Asphalt	32	332	59	1239	61	51	60	Mod	Fair	18	21	**56**
31100	52ND AVE	N 53RD AVE	DS@501E N 53RD AVE	Truck Route	Asphalt	31	501	86	1812	62	45	80	Strng	Fair	14	25	**55.2**
29880	52ND AVE	DS@501E N 53RD AVE	CASCADE DR	Truck Route	Asphalt	33	459	84	1,767	60	53	60	Mod	Fair	21	18	**57**
27520	52ND AVE	CASCADE DR	SUMMITVIEW AVE	Truck Route	Asphalt	32	296	53	1,105	64	41	80	Strng	Fair	16	20	**56**
31060	53RD AVE	S 53RD AVE	DS@398N S 53RD AVE	Local	Asphalt	31	398	69	1,439	60	46	80	Strng	Fair	13	27	**54**
29010	53RD AVE	DS@398N S 53RD AVE	CASCADE DR	Local	Asphalt	33	445	82	1,713	39	49	80	Strng	Marginal	26	35	**41**
32520	53RD AVE	N 53RD AVE	W CHESTNUT AVE	Local	Asphalt	35	294	57	1,201	61	44	80	Strng	Fair	17	21	**55**
39920	53RD AVE	TIETON DR	MEADOW LN	Local	Asphalt	29	181	29	612	54	47	80	Strng	Fair	18	28	**50.9**
40570	53RD AVE	MEADOW LN	MACLAREN CT	Local	Asphalt	29	277	45	937	53	75	60	Mod	Good	16	30	**60**
42120	53RD AVE	MACLAREN CT	WEBSTER CT	Local	Asphalt	30	426	71	1,491	34	44	80	Strng	Poor	29	37	**36**
43210	53RD AVE	WEBSTER CT	BRISTOL WAY CT	Local	Asphalt	30	265	44	928	26	41	80	Strng	Poor	43	31	**30**
44050	53RD AVE	BRISTOL WAY CT	W ARLINGTON ST	Local	Asphalt	30	235	39	823	37	34	80	Strng	Poor	26	37	**35**
45260	53RD AVE	W ARLINGTON ST	KONA LN	Local	Asphalt	30	169	28	592	80	61	80	Strng	V Good	0	20	**73.1**
45330	53RD AVE	KONA LN	MAUI PL	Local	Asphalt	30	68	11	238	73	67	80	Strng	V Good	0	27	**70.6**
45780	53RD AVE	MAUI PL	OAHU LN	Local	Asphalt	30	250	42	875	74	70	60	Mod	V Good	3	23	**71.7**
46420	53RD AVE	LANAI DR	DS@196S LANAI DR	Local	Asphalt	30	196	33	686	75	81	60	Mod	V Good	0	25	**75.7**
73000	53RD AVE	DS@196S LANAI DR	W NOB HILL BLVD	Local	Asphalt	30	612	102	2142	77	64	80	Strng	V Good	0	23	**72.3**
71210	54TH AVE	DS@146N ENGLEWOOD AVE	ENGLEWOOD HILL DR	Local	Concrete	28	152	24	497	100	90	60	Mod	Excellent	0	0	**96**
71200	54TH AVE	ENGLEWOOD AVE	DS@146N ENGLEWOOD AVE	Local	Concrete	28	146	23	477	100	90	60	Mod	Excellent	0	0	**96**
31070	54TH AVE	N 53RD AVE	DS@627N N 53RD AVE	Truck Route	Asphalt	33	627	115	2,414	64	43	80	Strng	Fair	14	22	**56**
29000	54TH AVE	DS@627N N 53RD AVE	CASCADE DR	Truck Route	Asphalt	31	450	78	1,628	59	40	80	Strng	Fair	18	22	**52**
40380	54TH AVE	MEADOW LN	DS@200S MEADOW LN	Local	Asphalt	29	200	32	677	59	58	80	Strng	Fair	14	27	**58**
41060	54TH AVE	DS@200S MEADOW LN	DS@391S MEADOW LN	Local	Asphalt	29	191	31	646	68	68	80	Strng	Good	5	27	**67**
42000	54TH AVE	DS@391S MEADOW LN	WEBSTER AVE	Local	Asphalt	28	149	23	487	67	65	80	Strng	Good	1	32	**65**
42540	54TH AVE	WEBSTER AVE	BRISTOL WY	Local	Asphalt	28	274	43	895	57	51	80	Strng	Fair	15	28	**54.1**
70670	54TH AVE	WHATCOM AVE	W WHITMAN ST	Local	Asphalt	28	435	68	1421	89	77	60	Mod	Excellent	0	11	**84.4**
72540	55TH AVE	ENGLEWOOD AVE	ENGLEWOOD HILL DR	Local	Asphalt	15	242	20	424	66	39	80	Strng	Fair	14	20	**56**
19830	55TH AVE	W LINCOLN AVE	RICHEY RD	Local	Asphalt	32	297	53	1109	66	39	80	Strng	Fair	11	22	**56.3**
18520	55TH AVE	RICHEY RD	NORTH END	Local	Asphalt	13	143	10	217	81	62	60	Mod	V Good	10	9	**74**
30670	55TH AVE	S 55TH AVE	DS@392N S 55TH AVE	Truck Route	Asphalt	31	392	68	1,418	57	49	80	Strng	Fair	19	24	**53**
28890	55TH AVE	DS@392N S 55TH AVE	CASCADE DR	Truck Route	Asphalt	33	423	78	1,629	62	57	80	Strng	Good	13	25	**60**
26900	55TH AVE	CASCADE DR	SUMMITVIEW AVE	Truck Route	Asphalt	32	176	31	657	64	38	80	Strng	Fair	10	25	**55**
32490	55TH AVE	N 55TH AVE	W CHESTNUT AVE	Truck Route	Asphalt	31	328	56	1,186	60	28	80	Strng	Marginal	19	21	**49**
70660	55TH AVE	WHATCOM AVE	W WHITMAN ST	Local	Asphalt	29	419	68	1,418	90	71	60	Mod	V Good	0	10	**83**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
13660	56TH AVE	ENGLEWOOD AVE	ENGLEWOOD HILL DR	Local	Concrete	28	278	43	908	100	90	60	Mod	Excellent	0	0	**96.1**
19810	56TH AVE	W LINCOLN AVE	RICHEY RD	Major Collector	Asphalt	39	498	108	2,266	64	46	80	Strng	Fair	16	20	**57**
17560	56TH AVE	RICHEY RD	GLACIER WY	Major Collector	Asphalt	40	179	40	835	59	37	80	Strng	Fair	20	21	**50.6**
16700	56TH AVE	GLACIER WY	DOUGLAS DR	Major Collector	Asphalt	40	325	72	1,517	53	52	60	Mod	Fair	24	23	**52**
15240	56TH AVE	DOUGLAS DR	ENGLEWOOD AVE	Major Collector	Asphalt	41	335	76	1,602	50	42	80	Strng	Marginal	23	27	**46**
25600	56TH AVE	SUMMITVIEW AVE	HAVEN WY	Major Collector	Asphalt	46	795	203	4,267	57	54	60	Mod	Fair	24	20	**55**
22280	56TH AVE	HAVEN WY	W LINCOLN AVE	Major Collector	Asphalt	47	543	142	2,977	53	52	60	Mod	Fair	27	21	**51**
30660	56TH AVE	S 56TH AVE	DS@353N S 56TH AVE	Major Collector	Asphalt	44	353	86	1,812	60	69	60	Mod	Good	16	25	**62**
29030	56TH AVE	DS@353N S 56TH AVE	SUMMITVIEW AVE	Major Collector	Asphalt	46	642	164	3,445	55	66	60	Mod	Fair	20	25	**57**
32470	56TH AVE	N 56TH AVE	W CHESTNUT AVE	Major Collector	Asphalt	44	325	79	1668	61	63	60	Mod	Good	21	18	**60.1**
35090	56TH AVE	W CHESTNUT AVE	W WALNUT ST	Major Collector	Asphalt	43	575	137	2885	64	71	60	Mod	Good	18	18	**65.2**
38170	56TH AVE	W WALNUT ST	TIETON DR	Major Collector	Asphalt	41	745	170	3,564	65	69	60	Mod	Good	20	15	**65**
39860	56TH AVE	TIETON DR	MEADOW LN	Local	Asphalt	60	191	64	1,337	44	31	80	Strng	Poor	28	28	**38**
40550	56TH AVE	MEADOW LN	MACLAREN ST	Local	Asphalt	57	282	89	1,875	47	52	80	Strng	Marginal	18	35	**47**
41840	56TH AVE	MACLAREN ST	WEBSTER AVE	Local	Asphalt	48	292	78	1,635	56	50	80	Strng	Fair	15	29	**53**
42620	56TH AVE	WEBSTER AVE	BRISTOL WY	Local	Asphalt	48	290	77	1,624	56	51	80	Strng	Fair	10	34	**53**
44010	56TH AVE	BRISTOL WY	W ARLINGTON ST	Local	Asphalt	48	265	71	1,484	54	65	60	Mod	Fair	18	29	**56**
70650	56TH AVE	WHATCOM AVE	W WHITMAN ST	Local	Asphalt	28	420	65	1,372	94	83	60	Mod	Excellent	0	6	**89**
19750	57TH AVE	W LINCOLN AVE	RICHEY RD	Local	Asphalt	33	501	92	1,929	67	50	80	Strng	Good	3	29	**60**
17450	57TH AVE	RICHEY RD	DOUGLAS DR	Local	Asphalt	31	538	93	1946	58	50	80	Strng	Fair	12	29	**54.3**
21090	57TH AVE	BITTERROOT LN	W LINCOLN AVE	Local	Asphalt	23	250	32	671	78	59	60	Mod	V Good	5	17	**71**
35490	57TH AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	29	658	106	2,226	78	72	60	Mod	V Good	2	20	**75**
40520	57TH AVE	NORTH END	MACLAREN ST	Local	Asphalt	37	286	58	1,223	57	44	80	Strng	Fair	12	31	**52**
41420	57TH AVE	MACLAREN ST	DS@224S MACLAREN ST	Local	Asphalt	28	224	35	732	66	54	80	Strng	Good	6	28	**61**
42440	57TH AVE	DS@224S MACLAREN ST	BRISTOL WY	Local	Asphalt	29	296	48	1001	53	61	80	Strng	Fair	18	29	**54.6**
62030	57TH AVE	WHATCOM AVE	W WHITMAN ST	Local	Asphalt	29	413	67	1397	68	62	80	Strng	Good	4	28	**65**
13630	58TH AVE	ENGLEWOOD AVE	ENGLEWOOD HILL PL	Local	Asphalt	30	278	46	973	40	50	80	Strng	Marginal	27	34	**42**
12640	58TH AVE	ENGLEWOOD HILL PL	DS@312N ENGLEWOOD HILL PL	Local	Asphalt	34	312	59	1,238	40	57	80	Strng	Marginal	28	32	**44**
11630	58TH AVE	DS@312N ENGLEWOOD HILL PL	MARILANE ST	Local	Asphalt	32	139	25	519	20	29	80	Strng	V Poor	50	30	**23**
11290	58TH AVE	MARILANE ST	DS@67N MARILANE ST	Local	Asphalt	28	67	10	219	42	31	80	Strng	Poor	23	35	**37**
11020	58TH AVE	DS@67N MARILANE ST	DS@285N MARILANE ST	Local	Asphalt	27	218	33	687	45	48	80	Strng	Marginal	25	30	**45**
10470	58TH AVE	DS@285N MARILANE ST	SCENIC DR	Local	Asphalt	24	471	63	1319	80	60	60	Mod	V Good	10	10	**72.3**
19700	58TH AVE	W LINCOLN AVE	RICHEY RD	Local	Asphalt	16	500	44	933	44	28	80	Strng	Poor	23	28	**38**
17440	58TH AVE	RICHEY RD	GLACIER WY	Local	Asphalt	32	302	54	1127	45	36	80	Strng	Marginal	22	33	**41.1**
16240	58TH AVE	GLACIER WY	DOUGLAS DR	Local	Asphalt	31	273	47	987	63	47	80	Strng	Fair	13	25	**57**
14930	58TH AVE	DOUGLAS DR	ENGLEWOOD AVE	Local	Asphalt	32	263	47	982	63	45	80	Strng	Fair	9	28	**56**
21730	58TH AVE	SOUTH END	BITTERROOT LN	Local	Asphalt	45	113	28	591	68	43	80	Strng	Fair	9	23	**58.8**
21280	58TH AVE	BITTERROOT LN	W LINCOLN AVE	Local	Asphalt	26	302	44	916	74	53	60	Mod	Good	12	14	**66**
32420	58TH AVE	W CHESTNUT AVE	BARGE ST	Local	Asphalt	31	664	114	2,401	68	50	80	Strng	Good	8	24	**61**
35470	58TH AVE	N 58TH AVE	W WALNUT ST	Local	Asphalt	29	673	108	2,277	71	58	80	Strng	Good	4	25	**66**
38140	58TH AVE	W WALNUT ST	TIETON DR	Local	Asphalt	30	659	110	2,307	78	66	80	Strng	V Good	0	21	**74**
40690	58TH AVE	TIETON DR	MACLAREN ST	Local	Asphalt	31	539	93	1,949	67	50	80	Strng	Good	9	24	**60**
42290	58TH AVE	MACLAREN ST	DS@360S MACLAREN ST	Local	Asphalt	30	360	60	1,260	63	49	80	Strng	Fair	12	25	**57**
43970	58TH AVE	DS@360S MACLAREN ST	W ARLINGTON ST	Local	Asphalt	29	420	68	1421	69	45	80	Strng	Good	9	22	**60.1**
62050	58TH AVE	WHATCOM AVE	W WHITMAN ST	Local	Asphalt	28	408	63	1,333	68	60	80	Strng	Good	5	27	**65**
32400	59TH AVE	W CHESTNUT AVE	BARGE ST	Local	Asphalt	32	663	118	2,475	66	44	80	Strng	Fair	7	27	**58**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
35450	59TH AVE	N 59TH AVE	W WALNUT ST	Local	Asphalt	30	662	110	2,317	70	49	80	Strng	Good	11	19	**62**
38110	59TH AVE	W WALNUT ST	TIETON DR	Local	Asphalt	30	660	110	2310	82	63	60	Mod	V Good	4	14	**74.6**
42330	59TH AVE	MACLAREN ST	DS@389S MACLAREN ST	Local	Asphalt	29	389	63	1,316	52	51	60	Mod	Fair	24	25	**50**
43950	59TH AVE	DS@389S MACLAREN ST	W ARLINGTON ST	Local	Asphalt	30	387	65	1,355	64	42	80	Strng	Fair	15	22	**56**
62040	59TH AVE	WHATCOM AVE	W WHITMAN ST	Local	Asphalt	28	397	62	1,297	74	64	80	Strng	V Good	0	26	**70**
75570	59TH AVE	W WHITMAN ST	COOLIDGE RD	Local	Asphalt	29	265	43	897	74	60	80	Strng	Good	0	26	**69**
75590	59TH AVE	COOLIDGE RD	CRESTFIELDS RD	Local	Asphalt	28	263	41	859	77	85	60	Mod	V Good	0	23	**79**
75600	59TH AVE	CRESTFIELDS RD	SOUTH END	Local	Asphalt	28	123	19	402	74	77	60	Mod	V Good	0	26	**74.2**
8250	5TH AVE	FRUITVALE BLVD	FRUITVALE BLVD	Principal Arterial	Concrete	27	69	10	217	91	74	60	Mod	Excellent	0	0	**85**
7980	5TH AVE	FRUITVALE BLVD	DS@213N FRUITVALE BLVD	Truck Route	Asphalt	48	213	57	1,193	74	53	60	Mod	Good	12	14	**66**
7190	5TH AVE	DS@213N FRUITVALE BLVD	W I ST	Truck Route	Asphalt	47	446	116	2,446	60	52	60	Mod	Fair	19	21	**56**
19530	5TH AVE	W LINCOLN AVE	W D ST	Truck Route	Composite	56	486	151	3,175	74	62	60	Mod	Good	12	14	**69**
17510	5TH AVE	W D ST	DS@484N W D ST	Truck Route	Composite	46	484	124	2,597	50	83	60	Mod	Good	17	27	**60**
15560	5TH AVE	DS@484N W D ST	CHERRY AVE	Truck Route	Asphalt	56	259	81	1,692	54	93	60	Mod	Good	11	35	**66**
14520	5TH AVE	CHERRY AVE	FAIRBANKS AVE	Truck Route	Asphalt	55	345	105	2214	54	96	60	Mod	Good	19	26	**67.3**
12910	5TH AVE	FAIRBANKS AVE	POPLAR ST	Truck Route	Composite	60	427	142	2,989	53	88	60	Mod	Good	25	22	**64**
11520	5TH AVE	POPLAR ST	WILLOW ST	Truck Route	Composite	55	541	165	3,471	50	98	60	Mod	Good	25	25	**65**
9990	5TH AVE	WILLOW ST	QUINCE ST	Truck Route	Composite	55	490	150	3144	58	84	60	Mod	Good	11	31	**66.2**
21770	5TH AVE	W MARTIN LUTHER KING JR BLVD	W LINCOLN AVE	Truck Route	Composite	55	477	146	3061	65	48	60	Mod	Fair	16	19	**58.8**
25540	5TH AVE	W YAKIMA AVE	DS@192N W YAKIMA AVE	Truck Route	Composite	60	192	64	1,344	59	48	60	Mod	Fair	22	20	**54**
24600	5TH AVE	DS@192N W YAKIMA AVE	W A ST	Truck Route	Composite	62	299	103	2,163	61	80	60	Mod	Good	19	20	**66**
23580	5TH AVE	W A ST	W MARTIN LUTHER KING JR BLVD	Truck Route	Composite	53	481	142	2,974	71	70	60	Mod	V Good	12	17	**70**
26810	5TH AVE	W YAKIMA AVE	DS@186S W YAKIMA AVE	Truck Route	Asphalt	66	186	68	1,432	74	57	60	Mod	Good	9	17	**67**
28260	5TH AVE	DS@186S W YAKIMA AVE	W CHESTNUT AVE	Truck Route	Asphalt	67	302	112	2,361	81	89	60	Mod	V Good	4	15	**83**
30470	5TH AVE	W CHESTNUT AVE	W WALNUT ST	Truck Route	Asphalt	67	481	179	3,760	75	67	60	Mod	V Good	10	15	**72**
33100	5TH AVE	W WALNUT ST	W SPRUCE ST	Minor Arterial	Asphalt	60	477	159	3,339	60	54	80	Strng	Fair	16	23	**57**
34870	5TH AVE	W SPRUCE ST	W PINE ST	Minor Arterial	Asphalt	60	482	161	3,374	50	50	60	Mod	Fair	27	23	**49**
36840	5TH AVE	W PINE ST	TIETON DR	Minor Arterial	Asphalt	61	480	163	3,416	70	49	80	Strng	Good	11	19	**62**
39280	5TH AVE	TIETON DR	DIVISION ST	Minor Arterial	Asphalt	59	481	158	3,311	51	52	80	Strng	Fair	22	27	**50**
40000	5TH AVE	DIVISION ST	QUEEN ANNE BLVD	Local	Asphalt	37	162	33	699	52	40	80	Strng	Marginal	17	31	**47**
40910	5TH AVE	QUEEN ANNE BLVD	PEACH ST	Local	Asphalt	28	343	53	1,120	67	69	80	Strng	Good	5	27	**67**
43420	5TH AVE	PEACH ST	SAINT HELENS ST	Local	Asphalt	27	511	77	1610	63	74	60	Mod	Good	11	27	**65.4**
45350	5TH AVE	SAINT HELENS ST	BAKER ST	Local	Asphalt	29	459	74	1,553	61	67	60	Mod	Good	16	23	**62**
46540	5TH AVE	BAKER ST	STEWART ST	Local	Asphalt	30	503	84	1,761	54	55	60	Mod	Fair	21	25	**53**
48820	5TH AVE	STEWART ST	W NOB HILL BLVD	Local	Asphalt	29	671	108	2,270	59	54	80	Strng	Fair	17	24	**56**
50650	5TH AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	30	672	112	2,352	80	61	60	Mod	V Good	6	14	**73**
52780	5TH AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	28	662	103	2,163	79	59	60	Mod	V Good	9	12	**71**
56120	5TH AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	30	664	111	2,324	75	54	80	Strng	Good	6	19	**67**
57820	5TH AVE	W MEAD AVE	W KING ST	Local	Asphalt	30	676	113	2,366	100	90	60	Mod	Excellent	0	0	**96**
58830	5TH AVE	W KING ST	W PIERCE ST	Local	Asphalt	30	646	108	2,261	100	90	60	Mod	Excellent	0	0	**96**
19620	60TH AVE	W LINCOLN AVE	GLACIER WY	Local	Asphalt	31	865	149	3128	73	59	60	Mod	Good	8	19	**67.1**
70150	60TH AVE	W CHESTNUT AVE	BARGE ST	Local	Asphalt	32	660	117	2,464	72	63	60	Mod	Good	6	22	**68**
35430	60TH AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	31	662	114	2394	70	46	80	Strng	Good	10	20	**61.2**
36710	60TH AVE	W WALNUT ST	VIEW HAVEN DR	Local	Asphalt	29	280	45	947	70	61	80	Strng	Good	4	27	**65.9**
38090	60TH AVE	VIEW HAVEN DR	TIETON DR	Local	Asphalt	28	381	59	1,245	67	52	80	Strng	Good	11	22	**61**
39850	60TH AVE	TIETON DR	MEADOW LN	Local	Asphalt	30	191	32	669	71	49	80	Strng	Good	6	22	**63**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
40650	60TH AVE	MEADOW LN	MACLAREN ST	Local	Asphalt	31	423	73	1,530	72	52	80	Strng	Good	6	23	**65**
42300	60TH AVE	MACLAREN ST	DS@376S MACLAREN ST	Local	Asphalt	30	376	63	1316	65	55	80	Strng	Good	8	27	**61.2**
43930	60TH AVE	DS@376S MACLAREN ST	W ARLINGTON ST	Local	Asphalt	29	401	65	1,357	64	60	80	Strng	Good	10	26	**62**
61900	60TH AVE	W WASHINGTON AVE	WHATCOM AVE	Local	Asphalt	24	804	107	2,251	80	67	60	Mod	V Good	7	13	**75**
62060	60TH AVE	WHATCOM AVE	W WHITMAN ST	Local	Asphalt	28	401	62	1310	75	69	60	Mod	V Good	5	21	**71.9**
75640	60TH AVE	W WHITMAN ST	COOLIDGE RD	Local	Asphalt	29	267	43	903	98	89	60	Mod	Excellent	0	2	**93.8**
75630	60TH AVE	COOLIDGE RD	CRESTFIELDS RD	Local	Asphalt	28	140	22	457	87	72	60	Mod	V Good	4	9	**81.2**
75650	60TH AVE	CRESTFIELDS RD	CRESTFIELDS RD	Local	Asphalt	27	126	19	397	86	67	60	Mod	V Good	0	15	**78.6**
19570	61ST AVE	W LINCOLN AVE	GLACIER WY	Local	Asphalt	35	804	156	3,283	70	54	60	Mod	Good	11	19	**64**
16170	61ST AVE	GLACIER WY	DOUGLAS DR	Local	Asphalt	31	95	16	344	63	51	80	Strng	Fair	0	37	**58.2**
15740	61ST AVE	DOUGLAS DR	DOUGLAS DR	Local	Asphalt	31	175	30	633	63	47	80	Strng	Fair	10	27	**57.1**
22580	61ST AVE	SOUTH END	W LINCOLN AVE	Local	Asphalt	31	650	112	2351	68	63	60	Mod	Good	9	23	**65.2**
32350	61ST AVE	W YAKIMA AVE	W CHESTNUT AVE	Local	Asphalt	29	259	42	876	67	42	80	Strng	Fair	6	26	**58**
35410	61ST AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	19	661	70	1465	61	44	80	Strng	Fair	16	23	**54.1**
38060	61ST AVE	VIEW HAVEN DR	TIETON DR	Local	Asphalt	29	364	59	1,232	73	62	60	Mod	Good	8	20	**68**
71160	61ST AVE	CRESTFIELDS RD	SOUTH END	Local	Asphalt	29	420	68	1421	58	61	80	Strng	Fair	10	33	**57.7**
76370	61ST AVE	EASY ST	OCCIDENTAL RD	Other	Asphalt	30	246	41	861	98	89	60	Mod	Excellent	0	2	**94.5**
76380	61ST AVE	OCCIDENTAL RD	UNKNOWN - 76410	Other	Asphalt	29	187	30	633	87	68	60	Mod	V Good	4	9	**80**
76390	61ST AVE	UNKNOWN - 76410	UNKNOWN - 76400	Other	Asphalt	29	285	46	964	93	80	60	Mod	Excellent	0	7	**88**
19550	62ND AVE	W LINCOLN AVE	DS@722N W LINCOLN AVE	Local	Asphalt	32	722	128	2,695	63	52	80	Strng	Fair	7	30	**59**
16340	62ND AVE	DS@722N W LINCOLN AVE	DOUGLAS DR	Local	Asphalt	31	179	31	647	65	62	80	Strng	Good	7	28	**63.2**
15690	62ND AVE	DOUGLAS DR	ENGLEWOOD AVE	Local	Asphalt	31	441	76	1595	50	44	80	Strng	Marginal	13	37	**47**
30930	62ND AVE	W YAKIMA AVE	NW END	Local	Asphalt	38	373	78	1,637	63	47	80	Strng	Fair	12	25	**57**
32300	62ND AVE	W YAKIMA AVE	W CHESTNUT AVE	Local	Asphalt	32	261	46	974	59	42	80	Strng	Fair	17	24	**52.3**
35340	62ND AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	24	653	87	1828	62	35	80	Strng	Fair	16	22	**51.8**
38040	62ND AVE	W WALNUT ST	TIETON DR	Local	Asphalt	27	671	101	2114	75	62	60	Mod	V Good	11	12	**69.6**
76350	62ND AVE	EASY ST	OCCIDENTAL RD	Other	Asphalt	29	243	39	822	99	90	60	Mod	Excellent	1	0	**94.7**
76360	62ND AVE	OCCIDENTAL RD	UNKNOWN - 76410	Other	Asphalt	30	197	33	690	91	73	60	Mod	V Good	0	9	**84**
76270	62ND AVE	W OAK AVE	W ACRE LN	Other	Asphalt	29	536	86	1813	93	81	60	Mod	Excellent	0	7	**88.2**
76280	62ND AVE	W ACRE LN	SOUTH END	Other	Asphalt	29	89	14	301	95	84	60	Mod	Excellent	0	5	**90.5**
19500	63RD AVE	W LINCOLN AVE	DS@682N W LINCOLN AVE	Local	Asphalt	29	682	110	2,307	67	62	80	Strng	Good	4	29	**65**
16470	63RD AVE	DS@682N W LINCOLN AVE	DOUGLAS DR	Local	Asphalt	30	224	37	784	61	55	80	Strng	Fair	13	25	**59**
15660	63RD AVE	DOUGLAS DR	NORTH END	Local	Asphalt	47	117	31	646	60	36	80	Strng	Fair	9	30	**51.2**
25400	63RD AVE	SUMMITVIEW AVE	LISA LN	Local	Asphalt	32	337	60	1,258	69	45	80	Strng	Good	5	26	**60**
23870	63RD AVE	LISA LN	DS@138E LISA LN	Local	Asphalt	32	138	25	515	56	44	80	Strng	Fair	1	42	**51**
23730	63RD AVE	DS@138E LISA LN	IVY AVE	Local	Asphalt	35	525	102	2144	57	61	80	Strng	Fair	5	38	**57.1**
21680	63RD AVE	IVY AVE	W LINCOLN AVE	Local	Asphalt	32	438	78	1,635	51	61	80	Strng	Fair	14	36	**53**
35320	63RD AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	33	656	120	2,526	67	49	80	Strng	Good	4	29	**60**
76300	63RD LN	W OAK AVE	WOOSLEY RD	Other	Asphalt	28	172	27	562	93	79	60	Mod	Excellent	0	7	**88**
76290	63RD LN	WOOSLEY RD	W ACRE LN	Other	Asphalt	30	365	61	1,278	89	70	60	Mod	V Good	4	6	**82**
19470	64TH AVE	W LINCOLN AVE	W RIDGE CT	Local	Asphalt	35	330	64	1,348	64	63	80	Strng	Good	9	27	**63**
17860	64TH AVE	W RIDGE CT	N RIDGE CT	Local	Asphalt	35	329	64	1,343	64	60	80	Strng	Good	11	25	**62**
16580	64TH AVE	N RIDGE CT	NW END	Local	Asphalt	38	556	119	2,494	65	43	80	Strng	Fair	11	24	**57**
35190	64TH AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	34	649	123	2,574	66	51	80	Strng	Good	6	28	**60**
40190	64TH AVE	TIETON DR	DS@410S TIETON DR	Minor Arterial	Asphalt	43	410	98	2,057	88	69	60	Mod	V Good	6	7	**81**
43900	64TH AVE	DS@410S TIETON DR	DS@1299S TIETON DR	Minor Arterial	Asphalt	37	889	183	3,838	97	100	60	Mod	Excellent	0	3	**96**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
47870	64TH AVE	DS@1299S TIETON DR	W NOB HILL BLVD	Minor Arterial	Asphalt	36	1,318	264	5,536	79	80	60	Mod	V Good	8	13	**79**
74960	64TH AVE	W NOB HILL BLVD	WALMART PARKING LOT	Minor Arterial	Asphalt	49	488	133	2,790	44	62	80	Strng	Fair	22	34	**49**
52010	64TH AVE	WALMART PARKING LOT	DS@862S WALMART PARKING LOT	Minor Arterial	Asphalt	46	862	220	4,626	48	69	60	Mod	Fair	25	27	**54**
55650	64TH AVE	DS@862S WALMART PARKING LOT	DS@2231S WALMART PARKING LOT	Minor Arterial	Asphalt	51	1,369	388	8,146	45	75	60	Mod	Fair	30	25	**53**
58950	64TH AVE	DS@2231S WALMART PARKING LOT	TERRY AVE	Minor Arterial	Asphalt	51	1,423	403	8,467	45	85	60	Mod	Fair	32	23	**57**
60600	64TH AVE	TERRY AVE	W WASHINGTON AVE	Minor Arterial	Asphalt	44	1,193	292	6,124	45	82	60	Mod	Fair	32	24	**56**
62070	64TH AVE	W WASHINGTON AVE	LEMONA DR	Truck Route	Asphalt	41	665	151	3,181	94	82	60	Mod	Excellent	0	6	**89**
62170	64TH AVE	LEMONA DR	DS@514S LEMONA DR	Truck Route	Asphalt	57	514	163	3,418	96	91	60	Mod	Excellent	0	5	**93**
62750	64TH AVE	DS@514S LEMONA DR	CRESTFIELDS RD	Truck Route	Asphalt	43	442	106	2,217	89	97	60	Mod	Excellent	5	7	**91**
62950	64TH AVE	CRESTFIELDS RD	WALLA WALLA ST	Truck Route	Asphalt	42	464	108	2,274	88	98	60	Mod	Excellent	0	12	**90**
63640	64TH AVE	WALLA WALLA ST	OCCIDENTAL RD	Truck Route	Asphalt	37	582	120	2,512	68	81	60	Mod	V Good	13	20	**71**
64310	64TH AVE	OCCIDENTAL RD	DS@1318S OCCIDENTAL RD	Truck Route	Asphalt	36	1,318	264	5,536	43	80	60	Mod	Fair	34	23	**54**
64850	64TH AVE	DS@1318S OCCIDENTAL RD	AHTANUM RD	Truck Route	Asphalt	37	643	132	2,776	68	75	60	Mod	V Good	18	13	**70**
13500	65TH AVE	ENGLEWOOD AVE	NORTH END	Local	Asphalt	33	548	102	2,141	64	50	80	Strng	Fair	10	25	**59**
32230	65TH AVE	W CHESTNUT AVE	W YAKIMA AVE	Local	Asphalt	36	241	48	1,012	75	56	80	Strng	Good	6	19	**68**
30980	65TH AVE	W YAKIMA AVE	W YAKIMA AVE	Local	Asphalt	36	45	9	189	77	57	80	Strng	V Good	0	23	**69**
30640	65TH AVE	W YAKIMA AVE	BARGE ST	Local	Asphalt	36	197	39	827	67	59	60	Mod	Good	13	21	**63**
30000	65TH AVE	BARGE ST	ALPINE WY	Local	Asphalt	35	612	119	2,499	63	66	60	Mod	Good	16	21	**63**
26880	65TH AVE	ALPINE WY	SUMMITVIEW AVE	Local	Asphalt	25	229	32	668	48	39	80	Strng	Marginal	24	28	**44**
35280	65TH AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	31	659	113	2,383	67	42	80	Strng	Fair	10	23	**58**
37300	65TH AVE	W WALNUT ST	PARSONS AVE	Local	Asphalt	30	450	75	1,575	57	43	80	Strng	Fair	19	24	**52**
38000	65TH AVE	PARSONS AVE	TIETON DR	Local	Asphalt	30	215	36	753	48	47	80	Strng	Marginal	24	28	**46**
63290	65TH AVE	CRESTFIELDS RD	S 66TH AVE	Local	Asphalt	28	1,156	180	3,776	73	72	60	Mod	V Good	3	24	**71**
24480	65TH PL	CENTURY AVE	NORTH END	Local	Asphalt	38	439	91	1,921	56	47	80	Strng	Fair	8	35	**52**
9110	66TH AVE	SCENIC DR	DS@671N SCENIC DR	Local	Asphalt	36	671	134	2,818	47	60	80	Strng	Fair	15	38	**51**
7330	66TH AVE	DS@671N SCENIC DR	PROSPECT WY	Local	Asphalt	34	671	127	2,662	45	67	60	Mod	Fair	33	22	**51**
13480	66TH AVE	ENGLEWOOD AVE	SCENIC DR	Other	Asphalt	27	1,306	196	4,114	90	71	60	Mod	V Good	6	3	**83**
19410	66TH AVE	W LINCOLN AVE	CHERRY RIDGE CT	Major Collector	Asphalt	26	260	38	789	61	59	80	Strng	Good	12	26	**59.6**
18380	66TH AVE	CHERRY RIDGE CT	GLACIER CT	Major Collector	Asphalt	33	414	76	1594	44	57	80	Strng	Marginal	26	30	**47.3**
16390	66TH AVE	GLACIER CT	N RIDGE CT	Major Collector	Asphalt	34	212	40	841	51	64	60	Mod	Fair	24	25	**54**
15650	66TH AVE	N RIDGE CT	DOUGLAS CT	Major Collector	Asphalt	32	74	13	276	53	52	80	Strng	Fair	13	34	**51.2**
15160	66TH AVE	DOUGLAS CT	ENGLEWOOD AVE	Major Collector	Asphalt	35	372	72	1519	61	52	80	Strng	Fair	17	23	**56.6**
25350	66TH AVE	SUMMITVIEW AVE	CENTURY AVE	Major Collector	Asphalt	34	177	33	702	91	74	60	Mod	Excellent	0	9	**85**
24460	66TH AVE	CENTURY AVE	SKYLINE AVE	Major Collector	Asphalt	35	360	70	1,470	77	76	60	Mod	V Good	8	15	**76**
23140	66TH AVE	SKYLINE AVE	APPLEVIEW RD	Major Collector	Asphalt	30	264	44	924	49	66	60	Mod	Fair	29	22	**52.9**
22090	66TH AVE	APPLEVIEW RD	APPLE VIEW WY	Major Collector	Asphalt	26	85	12	258	57	48	80	Strng	Fair	13	31	**53**
21690	66TH AVE	APPLE VIEW WY	W LINCOLN AVE	Major Collector	Asphalt	29	461	74	1,560	37	51	60	Mod	Marginal	34	29	**41**
28440	66TH AVE	CHINOOK DR	CHINOOK DR	Local	Asphalt	30	62	10	217	58	25	80	Strng	Marginal	24	19	**45.8**
28270	66TH AVE	CHINOOK DR	ALPINE WY	Local	Asphalt	32	204	36	762	60	72	60	Mod	Good	15	26	**63**
27300	66TH AVE	ALPINE WY	ALPINE WY	Local	Asphalt	31	85	15	307	77	65	60	Mod	V Good	7	15	**72**
26840	66TH AVE	ALPINE WY	NORTH END	Local	Asphalt	31	165	28	597	73	54	80	Strng	Good	0	27	**65.9**
32210	66TH AVE	NORTH END	W CHESTNUT AVE	Local	Asphalt	10	286	16	334	41	30	80	Strng	Poor	23	36	**36.3**
35230	66TH AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	22	659	81	1691	89	69	60	Mod	V Good	4	7	**81.5**
37960	66TH AVE	W WALNUT ST	TIETON DR	Local	Asphalt	31	660	114	2387	74	55	60	Mod	Good	8	18	**66.9**
59130	66TH AVE	NORTH END	TERRY AVE	Local	Asphalt	34	222	42	881	65	57	80	Strng	Good	1	34	**61.2**
59510	66TH AVE	TERRY AVE	PARSONS LP	Local	Asphalt	35	250	49	1,021	59	69	80	Strng	Good	2	38	**62**



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
60160	66TH AVE	PARSONS LP	FREMONT DR	Local	Asphalt	34	547	103	2170	61	71	60	Mod	Good	11	28	**63.5**
60580	66TH AVE	FREMONT DR	W WASHINGTON AVE	Local	Asphalt	36	311	62	1306	59	62	80	Strng	Fair	9	32	**58.8**
63300	66TH AVE	S 67TH AVE	S 65TH AVE	Local	Asphalt	28	160	25	523	50	40	80	Strng	Marginal	12	38	**45.6**
63620	66TH AVE	S 65TH AVE	OCCIDENTAL RD	Local	Asphalt	28	149	23	487	66	52	80	Strng	Good	0	34	**61**
28920	67TH AVE	SOUTH END	CHINOOK DR	Local	Asphalt	28	90	14	294	53	30	80	Strng	Marginal	21	26	**44**
28460	67TH AVE	CHINOOK DR	ALPINE WY	Local	Asphalt	32	271	48	1,012	69	50	80	Strng	Good	10	21	**62**
27250	67TH AVE	ALPINE WY	SUMMITVIEW AVE	Local	Asphalt	33	312	57	1,201	70	46	80	Strng	Good	8	22	**61**
71460	67TH AVE	S 67TH AVE	NORTH END	Local	Asphalt	30	295	49	1,033	61	55	60	Mod	Fair	21	18	**58**
71450	67TH AVE	N 67TH AVE	W CHESTNUT AVE	Local	Asphalt	28	212	33	693	57	48	60	Mod	Fair	24	19	**52.9**
34530	67TH AVE	W CHESTNUT AVE	DS@469S W CHESTNUT AVE	Local	Asphalt	34	469	89	1860	71	53	80	Strng	Good	4	25	**64**
35570	67TH AVE	DS@469S W CHESTNUT AVE	DS@724S W CHESTNUT AVE	Local	Asphalt	34	255	48	1,012	73	61	80	Strng	Good	4	23	**68**
37930	67TH AVE	DS@724S W CHESTNUT AVE	TIETON DR	Local	Asphalt	35	607	118	2,479	68	54	80	Strng	Good	6	26	**63**
55610	67TH AVE	NORTH END	W MEAD AVE	Local	Asphalt	20	469	52	1,094	55	64	80	Strng	Fair	8	37	**57**
57380	67TH AVE	W MEAD AVE	W KING ST	Local	Asphalt	20	704	78	1643	61	61	80	Strng	Good	10	29	**60.4**
71130	67TH AVE	W KING ST	W PIERCE ST	Local	Asphalt	22	402	49	1,032	64	53	80	Strng	Good	8	28	**59**
63250	67TH AVE	CRESTFIELDS RD	S 66TH AVE	Local	Asphalt	28	1,027	160	3,355	65	65	80	Strng	Good	8	27	**65**
63280	67TH AVE	S 66TH AVE	SW END	Local	Asphalt	42	270	63	1325	66	65	80	Strng	Good	4	30	**64.7**
23700	67TH PL	SOUTH END	SKYLINE AVE	Local	Asphalt	44	170	42	873	72	49	80	Strng	Good	6	23	**63**
19320	68TH AVE	W LINCOLN AVE	NORTH END	Local	Asphalt	33	616	114	2386	67	53	80	Strng	Good	8	25	**61.4**
32160	68TH AVE	W CHESTNUT AVE	W YAKIMA AVE	Local	Asphalt	31	269	46	973	81	62	60	Mod	V Good	6	13	**74.1**
34350	68TH AVE	W CHESTNUT AVE	DS@450S W CHESTNUT AVE	Local	Asphalt	33	450	83	1733	71	54	80	Strng	Good	3	26	**64.5**
35580	68TH AVE	DS@450S W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	35	283	55	1156	71	68	60	Mod	V Good	5	24	**68.9**
37910	68TH AVE	W WALNUT ST	TIETON DR	Local	Asphalt	33	590	108	2,272	70	66	60	Mod	Good	7	22	**68**
40710	68TH AVE	S 69TH AVE	DS@392E S 69TH AVE	Local	Asphalt	30	392	65	1,372	52	53	80	Strng	Fair	14	34	**51**
42160	68TH AVE	DS@392E S 69TH AVE	DUNDEE CT	Local	Asphalt	30	301	50	1054	48	54	80	Strng	Marginal	15	37	**48.8**
42800	68TH AVE	DUNDEE CT	BRISTOL WY	Local	Asphalt	29	253	41	856	55	60	80	Strng	Fair	11	34	**55.8**
50120	68TH AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	29	717	116	2,426	71	63	80	Strng	Good	4	25	**67**
55630	68TH AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	29	519	84	1,756	57	56	80	Strng	Fair	13	30	**56**
56960	68TH AVE	W MEAD AVE	SOUTH END	Local	Asphalt	35	414	81	1706	50	49	80	Strng	Fair	18	32	**49.1**
58160	68TH AVE	W KING ST	W PIERCE ST	Local	Asphalt	30	387	65	1355	72	69	60	Mod	V Good	5	23	**70.4**
74500	68TH AVE	S 69TH AVE	TERRY AVE	Local	Asphalt	31	470	81	1700	71	65	80	Strng	Good	1	28	**68.2**
59570	68TH AVE	TERRY AVE	DS@296S TERRY AVE	Local	Asphalt	29	296	48	1001	71	58	80	Strng	Good	5	23	**66.2**
60020	68TH AVE	DS@296S TERRY AVE	MULBERRY WY	Local	Asphalt	29	338	54	1,144	73	74	60	Mod	V Good	2	25	**72**
60130	68TH AVE	MULBERRY WY	SOUTH END	Local	Asphalt	44	134	32	681	65	61	80	Strng	Good	5	30	**63**
62740	68TH AVE	NW END	EASY ST	Local	Asphalt	53	164	48	1,009	85	66	60	Mod	V Good	0	15	**78**
63210	68TH AVE	EASY ST	SOUTH END	Local	Asphalt	29	770	124	2605	87	68	60	Mod	V Good	0	13	**80.2**
28880	68TH PL	CHINOOK DR	ALPINE WY	Local	Asphalt	32	481	86	1,796	74	61	80	Strng	Good	4	22	**69**
19290	69TH AVE	W LINCOLN AVE	NORTH END	Local	Asphalt	33	555	103	2165	64	46	80	Strng	Fair	9	27	**57.1**
28940	69TH AVE	CHINOOK DR	ALPINE WY	Local	Asphalt	32	379	67	1,415	75	60	80	Strng	V Good	0	25	**69**
27210	69TH AVE	ALPINE WY	SUMMITVIEW AVE	Local	Asphalt	32	307	55	1,146	68	44	80	Strng	Good	3	28	**59**
35550	69TH AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	34	732	138	2,904	72	59	80	Strng	Good	0	28	**66**
37890	69TH AVE	W WALNUT ST	TIETON DR	Local	Asphalt	35	605	118	2,470	76	58	80	Strng	Good	4	20	**69**
40070	69TH AVE	TIETON DR	S 68TH AVE	Local	Asphalt	30	376	63	1,316	37	49	80	Strng	Marginal	24	40	**40**
41010	69TH AVE	S 68TH AVE	STERLING CT	Local	Asphalt	29	375	60	1,269	54	63	80	Strng	Fair	10	36	**56**
42750	69TH AVE	STERLING CT	BRISTOL WY	Local	Asphalt	30	459	77	1607	47	70	80	Strng	Fair	19	34	**53.2**
50090	69TH AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	29	713	115	2,412	70	65	80	Strng	Good	5	25	**68**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
51090	69TH AVE	W PRASCH AVE	CLINTON WY	Local	Asphalt	30	272	45	952	68	68	80	Strng	Good	0	32	**67**
51610	69TH AVE	CLINTON WY	STORM AVE	Local	Asphalt	32	262	47	978	67	50	80	Strng	Good	8	25	**60**
55590	69TH AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	29	514	83	1739	81	62	60	Mod	V Good	3	17	**73.3**
57340	69TH AVE	W MEAD AVE	W KING ST	Local	Asphalt	29	694	112	2348	77	57	60	Mod	Good	6	18	**68.9**
74510	69TH AVE	S 68TH AVE	PERRY CT	Local	Asphalt	29	172	28	582	70	61	80	Strng	Good	0	30	**66.2**
59370	69TH AVE	PERRY CT	TERRY AVE	Local	Asphalt	30	240	40	840	73	63	80	Strng	Good	0	27	**69**
59680	69TH AVE	TERRY AVE	DS@239S TERRY AVE	Local	Asphalt	30	239	40	837	64	67	80	Strng	Good	4	31	**64.5**
60010	69TH AVE	DS@239S TERRY AVE	MULBERRY WY	Local	Asphalt	29	240	39	812	77	82	60	Mod	V Good	0	23	**78.3**
60270	69TH AVE	MULBERRY WY	MANOR WY	Local	Asphalt	30	285	48	998	75	66	80	Strng	V Good	0	25	**72**
62880	69TH AVE	COOLIDGE RD	EASY ST	Local	Asphalt	29	791	127	2676	62	74	60	Mod	Good	10	29	**64.7**
63600	69TH AVE	EASY ST	OCCIDENTAL RD	Local	Asphalt	29	792	128	2,680	64	66	80	Strng	Good	8	28	**64**
4170	6TH AVE	RIVER RD	DS@616N RIVER RD	Local	Asphalt	34	616	116	2,443	66	81	60	Mod	V Good	17	16	**70**
3460	6TH AVE	DS@616N RIVER RD	DS@962N RIVER RD	Local	Asphalt	44	346	85	1,776	47	70	80	Strng	Fair	15	30	**54**
3200	6TH AVE	DS@962N RIVER RD	DS@1676N RIVER RD	Local	Asphalt	27	714	107	2,249	42	65	60	Mod	Marginal	26	32	**48**
2720	6TH AVE	DS@1676N RIVER RD	DS@2022N RIVER RD	Local	Asphalt	36	346	69	1,453	92	91	60	Mod	Excellent	0	8	**91**
2510	6TH AVE	DS@2022N RIVER RD	DS@2352N RIVER RD	Local	Asphalt	39	330	72	1,502	96	87	60	Mod	Excellent	0	4	**93**
2420	6TH AVE	DS@2352N RIVER RD	DS@2746N RIVER RD	Local	Asphalt	38	394	83	1747	83	64	60	Mod	V Good	6	11	**75.5**
2300	6TH AVE	DS@2746N RIVER RD	GORDON RD	Local	Asphalt	21	194	23	475	41	26	80	Strng	Poor	26	33	**35.1**
6100	6TH AVE	W I ST	W J ST	Major Collector	Asphalt	29	320	52	1,083	36	61	60	Mod	Marginal	38	26	**43**
5350	6TH AVE	W J ST	MADISON AVE	Major Collector	Asphalt	46	337	86	1,809	49	49	80	Strng	Marginal	20	31	**47**
4890	6TH AVE	MADISON AVE	DS@325N MADISON AVE	Major Collector	Asphalt	34	325	61	1,289	32	39	80	Strng	Poor	33	35	**33**
4560	6TH AVE	DS@325N MADISON AVE	RIVER RD	Major Collector	Asphalt	29	323	52	1093	25	46	60	Mod	Poor	44	32	**30.5**
7840	6TH AVE	FRUITVALE BLVD	DS@149N FRUITVALE BLVD	Major Collector	Asphalt	36	149	30	626	28	33	80	Strng	Poor	35	37	**28.3**
7290	6TH AVE	DS@149N FRUITVALE BLVD	LAUREL ST	Major Collector	Concrete	22	173	21	444	29	33	60	Mod	Poor	0	0	**29**
6930	6TH AVE	LAUREL ST	DS@161N LAUREL ST	Major Collector	Concrete	27	161	24	507	29	40	60	Mod	Poor	0	0	**32**
6620	6TH AVE	DS@161N LAUREL ST	W I ST	Major Collector	Concrete	24	170	23	476	38	33	60	Mod	Poor	0	0	**35.4**
20550	6TH AVE	W LINCOLN AVE	W D ST	Local	Asphalt	43	484	116	2428	48	63	80	Strng	Fair	12	41	**52**
17910	6TH AVE	W D ST	MCKINLEY AVE	Local	Asphalt	59	212	69	1,459	50	36	80	Strng	Marginal	21	28	**44**
17050	6TH AVE	MCKINLEY AVE	DS@168N MCKINLEY AVE	Local	Asphalt	40	168	37	784	32	37	80	Strng	Poor	33	35	**32.8**
16410	6TH AVE	DS@168N MCKINLEY AVE	ROOSEVELT AVE	Local	Asphalt	40	163	36	761	37	57	80	Strng	Marginal	29	35	**42**
15930	6TH AVE	ROOSEVELT AVE	DS@171N ROOSEVELT AVE	Local	Asphalt	44	171	42	878	37	51	80	Strng	Marginal	20	43	**41**
14980	6TH AVE	DS@171N ROOSEVELT AVE	CHERRY AVE	Local	Asphalt	44	162	40	832	36	54	80	Strng	Marginal	28	35	**41**
14490	6TH AVE	CHERRY AVE	DS@166N CHERRY AVE	Local	Asphalt	40	166	37	775	44	53	80	Strng	Marginal	19	37	**46**
13510	6TH AVE	DS@166N CHERRY AVE	FAIRBANKS AVE	Local	Asphalt	44	181	44	929	32	47	80	Strng	Poor	28	40	**36**
12860	6TH AVE	FAIRBANKS AVE	JEROME AVE	Local	Asphalt	43	309	74	1,550	40	42	80	Strng	Marginal	24	36	**40**
11970	6TH AVE	JEROME AVE	POPLAR ST	Local	Asphalt	41	114	26	545	31	54	80	Strng	Poor	24	46	**38**
11470	6TH AVE	POPLAR ST	SWAN AVE	Local	Asphalt	39	126	27	573	50	50	80	Strng	Marginal	21	29	**49**
11110	6TH AVE	SWAN AVE	DS@218N SWAN AVE	Local	Asphalt	40	218	48	1,017	39	50	80	Strng	Marginal	20	41	**42**
10340	6TH AVE	DS@218N SWAN AVE	WILLOW ST	Local	Asphalt	40	197	44	919	32	58	80	Strng	Marginal	28	39	**40**
9930	6TH AVE	WILLOW ST	WILLOW ST	Local	Asphalt	40	42	9	196	49	46	80	Strng	Marginal	18	33	**47**
9490	6TH AVE	WILLOW ST	DS@173N WILLOW ST	Local	Asphalt	39	173	37	787	44	38	80	Strng	Marginal	19	37	**41**
72770	6TH AVE	DS@173N WILLOW ST	DS@451N WILLOW ST	Local	Asphalt	40	278	62	1,297	38	44	80	Strng	Marginal	23	38	**39**
72760	6TH AVE	DS@451N WILLOW ST	FRUITVALE BLVD	Local	Asphalt	39	201	44	915	42	38	80	Strng	Marginal	27	31	**39.6**
22260	6TH AVE	W MARTIN LUTHER KING JR BLVD	W LINCOLN AVE	Local	Asphalt	42	475	111	2328	41	45	60	Mod	Marginal	34	25	**40.8**
26660	6TH AVE	W YAKIMA AVE	DS@192N W YAKIMA AVE	Local	Asphalt	67	192	71	1,501	53	41	80	Strng	Marginal	22	25	**48**
25300	6TH AVE	DS@192N W YAKIMA AVE	W A ST	Local	Asphalt	65	302	109	2290	54	56	60	Mod	Fair	23	23	**53.5**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
23930	6TH AVE	W A ST	W MARTIN LUTHER KING JR BLVD	Local	Asphalt	43	480	115	2408	43	62	60	Mod	Marginal	32	25	**48.5**
27500	6TH AVE	W YAKIMA AVE	DS@187S W YAKIMA AVE	Local	Asphalt	43	187	45	938	59	34	80	Strng	Fair	6	34	**49.7**
28850	6TH AVE	DS@187S W YAKIMA AVE	W CHESTNUT AVE	Local	Asphalt	43	303	72	1,520	52	57	80	Strng	Fair	7	41	**53**
31040	6TH AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	43	479	114	2,403	48	65	80	Strng	Fair	12	40	**53**
35370	6TH AVE	NORTH END	W PINE ST	Local	Composite	41	238	54	1,138	52	36	80	Strng	Marginal	22	26	**45**
70270	6TH AVE	TIETON DR	DIVISION ST	Local	Concrete	36	367	73	1,541	39	47	60	Mod	Marginal	0	0	**41**
70260	6TH AVE	DIVISION ST	PEACH ST	Local	Concrete	30	511	85	1789	58	42	60	Mod	Fair	0	0	**51.8**
43380	6TH AVE	PEACH ST	SAINT HELENS ST	Local	Concrete	29	510	82	1726	68	42	60	Mod	Fair	0	0	**58.5**
45280	6TH AVE	SAINT HELENS ST	BAKER ST	Local	Asphalt	30	459	77	1607	90	70	60	Mod	V Good	0	10	**82.8**
46520	6TH AVE	BAKER ST	STEWART ST	Local	Asphalt	31	503	87	1,819	81	62	60	Mod	V Good	4	15	**74**
48990	6TH AVE	STEWART ST	W NOB HILL BLVD	Local	Asphalt	30	671	112	2,349	60	45	80	Strng	Fair	11	29	**54**
50630	6TH AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	31	671	116	2427	78	60	60	Mod	V Good	4	18	**71.3**
52740	6TH AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	30	661	110	2,314	80	61	60	Mod	V Good	4	16	**73**
54810	6TH AVE	W VIOLA AVE	W LOGAN AVE	Local	Asphalt	30	660	110	2,310	69	60	80	Strng	Good	7	24	**66**
56070	6TH AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	29	651	105	2,203	63	43	80	Strng	Fair	14	23	**55**
57680	6TH AVE	W MEAD AVE	W KING ST	Local	Asphalt	30	672	112	2,352	100	90	60	Mod	Excellent	0	0	**96**
58810	6TH AVE	W KING ST	W PIERCE ST	Local	Asphalt	30	650	108	2,275	100	90	60	Mod	Excellent	0	0	**96**
2590	6TH ST	E R ST	E S ST	Local	Asphalt	30	322	54	1,127	81	63	60	Mod	V Good	4	14	**74**
5950	6TH ST	E I ST	E K ST	Local	Asphalt	33	651	119	2,506	35	48	80	Strng	Poor	35	18	**38**
4770	6TH ST	E K ST	DS@167N E K ST	Local	Asphalt	20	167	19	390	37	52	80	Strng	Marginal	31	32	**41**
4620	6TH ST	DS@167N E K ST	NORTH END	Local	Asphalt	22	229	28	588	82	70	60	Mod	V Good	7	10	**78**
7380	6TH ST	E G ST	E H ST	Major Collector	Asphalt	39	502	109	2284	72	54	60	Mod	Good	13	15	**64.7**
6370	6TH ST	E H ST	E I ST	Major Collector	Asphalt	40	121	27	565	63	37	80	Strng	Fair	15	22	**53**
13150	6TH ST	E LINCOLN AVE	E D ST	Major Collector	Asphalt	39	479	104	2179	89	76	60	Mod	V Good	0	12	**83.7**
11620	6TH ST	E D ST	E E ST	Major Collector	Asphalt	40	480	107	2240	95	86	60	Mod	Excellent	0	5	**91.2**
10220	6TH ST	E E ST	E F ST	Major Collector	Asphalt	39	480	104	2184	93	81	60	Mod	Excellent	0	7	**88.6**
8800	6TH ST	E F ST	E G ST	Major Collector	Asphalt	41	479	109	2291	85	66	60	Mod	V Good	4	11	**78**
15070	6TH ST	E MARTIN LUTHER KING JR BLVD	E LINCOLN AVE	Principal Arterial	Asphalt	40	476	106	2221	86	67	60	Mod	V Good	0	14	**78.6**
19180	6TH ST	E YAKIMA AVE	STAFF SGT PENDLETON WAY	Principal Arterial	Asphalt	50	494	137	2,882	89	72	60	Mod	V Good	0	12	**82**
17030	6TH ST	STAFF SGT PENDLETON WAY	E MARTIN LUTHER KING JR BLVD	Principal Arterial	Asphalt	40	482	107	2,249	82	66	60	Mod	V Good	9	9	**76**
21410	6TH ST	E YAKIMA AVE	E CHESTNUT AVE	Minor Arterial	Asphalt	49	490	133	2,801	64	68	60	Mod	Good	15	21	**64**
23310	6TH ST	E CHESTNUT AVE	E WALNUT ST	Minor Arterial	Asphalt	49	477	130	2,727	76	73	60	Mod	V Good	7	16	**74**
25280	6TH ST	E WALNUT ST	E SPRUCE ST	Major Collector	Asphalt	49	482	131	2,755	87	74	60	Mod	V Good	0	13	**82**
27920	6TH ST	E SPRUCE ST	E PINE ST	Major Collector	Asphalt	49	484	132	2,767	98	91	60	Mod	Excellent	0	2	**95**
30110	6TH ST	E PINE ST	E MAPLE ST	Major Collector	Asphalt	49	479	130	2,738	97	95	60	Mod	Excellent	0	3	**95**
32340	6TH ST	E MAPLE ST	E BEECH ST	Major Collector	Asphalt	49	480	131	2744	91	90	60	Mod	Excellent	4	5	**89.7**
34580	6TH ST	E RACE ST	E BEECH ST	Major Collector	Asphalt	48	479	128	2,682	99	90	60	Mod	Excellent	0	1	**95**
36980	6TH ST	E RACE ST	E ADAMS ST	Major Collector	Asphalt	49	565	154	3,230	91	92	60	Mod	Excellent	7	3	**90**
39600	6TH ST	E ADAMS ST	PACIFIC AVE	Major Collector	Asphalt	49	465	127	2,658	84	86	60	Mod	V Good	4	12	**84**
41070	6TH ST	PACIFIC AVE	RAINIER ST	Major Collector	Asphalt	49	490	133	2,801	48	58	60	Mod	Fair	25	27	**50**
42830	6TH ST	RAINIER ST	LA SALLE ST	Major Collector	Asphalt	38	459	97	2035	37	65	60	Mod	Marginal	37	26	**45.3**
45060	6TH ST	LA SALLE ST	E ARLINGTON ST	Major Collector	Asphalt	37	367	75	1,584	36	52	60	Mod	Marginal	38	25	**40**
46900	6TH ST	E ARLINGTON ST	CENTRAL AVE	Major Collector	Asphalt	45	690	173	3623	53	55	80	Strng	Fair	21	26	**52.3**
47260	6TH ST	CENTRAL AVE	DS@211S CENTRAL AVE	Major Collector	Asphalt	44	211	52	1,083	54	49	60	Mod	Fair	33	13	**51**
48060	6TH ST	DS@211S CENTRAL AVE	E NOB HILL BLVD	Major Collector	Asphalt	48	338	90	1,893	77	58	80	Strng	V Good	4	18	**70**
49270	6TH ST	E NOB HILL BLVD	RANCH RITE RD	Local	Asphalt	57	111	35	738	88	69	60	Mod	V Good	0	12	**81.3**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
50930	6TH ST	RANCH RITE RD	WILSON LN	Local	Asphalt	28	702	109	2,293	35	61	60	Mod	Marginal	32	33	**42**
51520	6TH ST	WILSON LN	S 1ST ST	Local	Asphalt	44	275	67	1412	43	46	80	Strng	Marginal	24	33	**43.2**
25330	70TH AVE	SUMMITVIEW AVE	DS@388W SUMMITVIEW AVE	Local	Asphalt	30	388	65	1,358	53	47	80	Strng	Fair	3	44	**50**
25060	70TH AVE	DS@388W SUMMITVIEW AVE	DS@795N SUMMITVIEW AVE	Local	Asphalt	32	407	72	1,519	77	80	60	Mod	V Good	8	15	**77**
23380	70TH AVE	DS@795N SUMMITVIEW AVE	AVALANCHE AVE	Local	Asphalt	30	340	57	1,190	63	63	60	Mod	Good	16	21	**62**
32050	70TH AVE	W YAKIMA AVE	W CHESTNUT AVE	Local	Asphalt	31	216	37	781	36	51	80	Strng	Marginal	31	33	**40.2**
35530	70TH AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	27	734	110	2312	74	70	60	Mod	V Good	8	19	**71.7**
37870	70TH AVE	W WALNUT ST	TIETON DR	Local	Asphalt	28	605	94	1976	73	51	80	Strng	Good	4	23	**64.5**
40780	70TH AVE	TIETON DR	MACLAREN WY	Local	Asphalt	29	657	106	2,223	73	71	60	Mod	V Good	8	19	**72**
42320	70TH AVE	MACLAREN WY	LINDGREN DR	Local	Asphalt	31	333	57	1,204	80	81	60	Mod	V Good	0	20	**80**
50070	70TH AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	26	710	103	2,154	69	75	60	Mod	V Good	7	24	**70**
51300	70TH AVE	W PRASCH AVE	SOUTH END	Local	Asphalt	26	374	54	1,134	72	63	80	Strng	Good	5	23	**68**
57320	70TH AVE	W KING ST	SCOTT CT	Local	Asphalt	30	196	33	686	59	48	80	Strng	Fair	11	30	**54.3**
58280	70TH AVE	W KING ST	PIERCE CT	Local	Asphalt	29	496	80	1,678	62	62	80	Strng	Good	9	29	**61**
60300	70TH AVE	TERRY AVE	MANOR WY	Local	Asphalt	33	599	110	2,306	73	77	80	Strng	V Good	0	27	**74**
60550	70TH AVE	MANOR WY	W WASHINGTON AVE	Local	Asphalt	35	169	33	690	81	62	80	Strng	V Good	0	19	**74**
76210	70TH AVE	NORTH END	VISTA RIDGE AVE	Other	Asphalt	28	112	17	366	94	82	60	Mod	Excellent	0	6	**89**
76170	70TH AVE	VISTA RIDGE AVE	EASY ST	Other	Asphalt	28	206	32	673	98	89	60	Mod	Excellent	0	2	**94**
28960	71ST AVE	CHINOOK DR	ALPINE WY	Local	Asphalt	31	246	42	890	69	63	80	Strng	Good	4	27	**65.9**
40760	71ST AVE	TIETON DR	MACLAREN WY	Local	Asphalt	29	666	107	2253	57	49	80	Strng	Fair	12	31	**53.5**
56500	71ST AVE	W MEAD AVE	LOREN PL	Local	Asphalt	29	206	33	697	74	70	80	Strng	V Good	0	26	**71.7**
59790	71ST AVE	COTTAGE WY	SPOKANE ST	Local	Asphalt	33	150	28	578	71	76	80	Strng	V Good	2	27	**72**
60220	71ST AVE	SPOKANE ST	MANOR WY	Local	Asphalt	29	460	74	1556	75	82	60	Mod	V Good	0	25	**76.6**
13350	72ND AVE	ENGLEWOOD AVE	ENGLEWOOD HILL PL	Local	Asphalt	30	384	64	1344	75	54	80	Strng	Good	4	21	**66.9**
12320	72ND AVE	ENGLEWOOD HILL PL	MODESTO WY	Local	Asphalt	30	373	62	1306	68	54	80	Strng	Good	9	23	**62.7**
11100	72ND AVE	MODESTO WY	NW END	Local	Asphalt	36	653	130	2734	69	48	80	Strng	Good	8	23	**61.2**
25370	72ND AVE	SUMMITVIEW AVE	AVALANCHE AVE	Local	Asphalt	29	847	136	2,866	52	49	80	Strng	Fair	15	33	**50**
29090	72ND AVE	W CHESTNUT AVE	ALPINE WY	Truck Route	Asphalt	52	845	244	5,126	61	80	60	Mod	Good	21	18	**66**
27950	72ND AVE	ALPINE WY	SUMMITVIEW AVE	Truck Route	Asphalt	53	444	131	2745	64	60	60	Mod	Good	20	16	**61.2**
37840	72ND AVE	W CHESTNUT AVE	TIETON DR	Truck Route	Asphalt	59	1322	433	9100	65	72	60	Mod	Good	14	19	**66.6**
40730	72ND AVE	TIETON DR	MACLAREN WY	Truck Route	Asphalt	47	654	171	3586	63	64	60	Mod	Good	16	21	**62.5**
42340	72ND AVE	MACLAREN WY	LINDGREN DR	Truck Route	Asphalt	47	361	94	1979	43	69	60	Mod	Fair	25	33	**50.3**
43870	72ND AVE	LINDGREN DR	MIDVALE RD	Truck Route	Asphalt	48	310	83	1736	52	66	80	Strng	Fair	17	31	**56**
47820	72ND AVE	MIDVALE RD	W NOB HILL BLVD	Truck Route	Asphalt	62	1,314	453	9,505	56	62	60	Mod	Fair	18	24	**57**
50060	72ND AVE	W NOB HILL BLVD	W PRASCH AVE	Truck Route	Asphalt	61	672	228	4,782	52	57	80	Strng	Fair	20	29	**52**
51980	72ND AVE	W PRASCH AVE	W VIOLA AVE	Truck Route	Asphalt	52	634	183	3,846	50	75	60	Mod	Fair	19	31	**57**
74570	72ND AVE	W VIOLA AVE	BORLEY WY	Truck Route	Asphalt	49	80	22	457	73	86	60	Mod	V Good	5	22	**77**
53640	72ND AVE	BORLEY WY	GREGORY PL	Truck Route	Asphalt	48	420	112	2,352	56	87	60	Mod	Good	15	29	**65**
55050	72ND AVE	GREGORY PL	WILLOW CT	Truck Route	Asphalt	52	478	138	2,900	64	74	60	Mod	Good	10	27	**66**
55140	72ND AVE	WILLOW CT	WILLOW PL	Minor Arterial	Asphalt	49	58	16	332	44	76	60	Mod	Fair	24	31	**53**
55550	72ND AVE	WILLOW PL	W MEAD AVE	Truck Route	Asphalt	54	301	90	1,896	77	84	60	Mod	V Good	7	15	**79**
57310	72ND AVE	W MEAD AVE	W KING ST	Truck Route	Asphalt	52	705	204	4,277	68	87	60	Mod	V Good	8	24	**73**
58520	72ND AVE	W KING ST	ZIER RD	Truck Route	Asphalt	53	631	186	3,902	61	91	60	Mod	V Good	10	29	**70**
59290	72ND AVE	ZIER RD	STREIF RD	Truck Route	Asphalt	57	321	102	2,135	57	75	60	Mod	Good	14	28	**62**
59750	72ND AVE	STREIF RD	SPOKANE ST	Truck Route	Asphalt	47	366	96	2,007	62	91	60	Mod	V Good	9	29	**71**
73120	72ND AVE	SPOKANE ST	FREMONT WY	Truck Route	Asphalt	54	314	94	1,978	60	92	60	Mod	V Good	7	33	**70**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
60520	72ND AVE	FREMONT WY	W WASHINGTON AVE	Truck Route	Asphalt	62	346	119	2,503	59	83	60	Mod	Good	11	31	**66**
61380	72ND AVE	W WASHINGTON AVE	SALI RD	Major Collector	Asphalt	58	326	105	2,206	62	83	60	Mod	Good	8	30	**69**
72280	72ND AVE	SALI RD	CROWN CREST WY	Major Collector	Asphalt	37	146	30	630	63	52	80	Strng	Fair	14	23	**57.7**
72270	72ND AVE	CROWN CREST WY	COOLIDGE RD	Major Collector	Asphalt	34	763	144	3027	42	49	80	Strng	Marginal	30	29	**42.9**
23830	73RD AVE	SADDLEBROOK DR	DS@388N SADDLEBROOK DR	Local	Asphalt	29	388	63	1313	61	68	80	Strng	Good	8	31	**62.5**
22550	73RD AVE	DS@388N SADDLEBROOK DR	AVALANCHE CT	Local	Asphalt	31	271	47	980	56	62	80	Strng	Fair	12	32	**57.1**
21780	73RD AVE	AVALANCHE CT	LINCOLN ESTATES DR	Local	Asphalt	31	276	48	998	50	71	80	Strng	Fair	14	36	**56.3**
32020	73RD AVE	W YAKIMA AVE	W CHESTNUT AVE	Local	Asphalt	31	173	30	626	66	46	80	Strng	Fair	7	28	**58.2**
42270	73RD AVE	MAREE LN	HOLLY LN	Local	Asphalt	29	201	32	680	69	72	80	Strng	Good	4	28	**69**
43830	73RD AVE	HOLLY LN	MIDVALE RD	Local	Asphalt	29	345	56	1,167	66	69	80	Strng	Good	5	29	**66**
58260	73RD AVE	W MEAD AVE	W PIERCE ST	Local	Asphalt	29	1,179	190	3,989	54	61	80	Strng	Fair	13	33	**55**
59730	73RD AVE	PERRY ST	SPOKANE ST	Local	Asphalt	29	391	63	1323	71	58	60	Mod	Good	9	20	**65.7**
72320	73RD AVE	W WASHINGTON AVE	HEATHERS WY	Local	Asphalt	28	163	25	532	69	46	80	Strng	Good	0	31	**60.7**
61560	73RD AVE	CROWN CREST WY	UNKNOWN - 76120	Local	Asphalt	29	273	44	924	91	72	60	Mod	V Good	0	9	**83.7**
27750	74TH AVE	ALPINE WAY	SUMMITVIEW AVE	Local	Asphalt	31	454	78	1642	83	64	60	Mod	V Good	8	9	**75.9**
25210	74TH AVE	SUMMITVIEW AVE	SADDLEBROOK DR	Local	Asphalt	36	308	62	1294	52	32	80	Strng	Marginal	24	24	**44.7**
23780	74TH AVE	SADDLEBROOK DR	DS@369N SADDLEBROOK DR	Local	Asphalt	36	369	74	1,550	49	59	60	Mod	Fair	25	26	**51**
23250	74TH AVE	DS@369N SADDLEBROOK DR	LINCOLN ESTATES DR	Local	Asphalt	39	484	105	2202	69	67	60	Mod	Good	13	17	**67.8**
20470	74TH AVE	LINCOLN ESTATES DR	W LINCOLN AVE	Local	Asphalt	38	163	34	723	73	58	80	Strng	Good	6	20	**68**
19260	74TH AVE	W LINCOLN AVE	RICHEY RD	Local	Asphalt	37	270	56	1,166	70	53	80	Strng	Good	10	20	**63**
18030	74TH AVE	RICHEY RD	ENGLEWOOD AVE	Local	Asphalt	35	1,057	206	4,316	76	63	60	Mod	V Good	9	15	**71**
13330	74TH AVE	ENGLEWOOD AVE	PLATEAU PL	Local	Asphalt	38	440	93	1951	45	50	80	Strng	Marginal	28	28	**45.6**
12220	74TH AVE	PLATEAU PL	MODESTO WY	Local	Asphalt	29	247	40	836	59	75	60	Mod	Good	11	30	**63**
11370	74TH AVE	MODESTO WY	NORTH END	Local	Asphalt	37	523	106	2231	64	58	80	Strng	Good	10	26	**61.2**
32040	74TH AVE	W YAKIMA AVE	W CHESTNUT AVE	Local	Asphalt	30	184	31	644	68	57	80	Strng	Good	0	32	**63.5**
35140	74TH AVE	W WALNUT ST	W CHESTNUT AVE	Local	Asphalt	29	669	108	2263	59	65	80	Strng	Good	11	30	**60.4**
37810	74TH AVE	NORTH END	TIETON DR	Local	Asphalt	35	361	71	1,487	62	45	80	Strng	Fair	10	28	**55**
41820	74TH AVE	MAREE LN	STACY LN	Local	Asphalt	29	86	14	291	54	59	80	Strng	Fair	13	32	**55**
42260	74TH AVE	STACY LN	HOLLY LN	Local	Asphalt	28	117	18	382	66	52	80	Strng	Good	7	27	**61**
58230	74TH AVE	W MEAD AVE	W PIERCE ST	Local	Asphalt	29	1,166	188	3,945	61	73	60	Mod	Good	10	29	**64**
59710	74TH AVE	PERRY ST	SPOKANE ST	Local	Asphalt	30	399	67	1,397	73	51	80	Strng	Good	5	22	**65**
60250	74TH AVE	FREMONT WY	W WASHINGTON AVE	Local	Asphalt	28	225	35	735	72	50	80	Strng	Good	5	23	**64**
17990	75TH AVE	GLACIER WY	RICHEY RD	Local	Asphalt	29	327	53	1,106	70	55	80	Strng	Good	5	26	**64**
37800	75TH AVE	NORTH END	TIETON DR	Local	Asphalt	22	425	52	1,091	94	84	60	Mod	Excellent	3	3	**90**
40010	75TH AVE	TIETON DR	MEADOW LN	Local	Asphalt	29	386	62	1,306	60	60	80	Strng	Good	12	27	**59**
41790	75TH AVE	MACLAREN ST	STACY LN	Local	Asphalt	29	167	27	565	65	81	80	Strng	V Good	4	31	**70**
43760	75TH AVE	STACY LN	MIDVALE RD	Local	Asphalt	29	490	79	1,658	73	69	60	Mod	V Good	5	22	**71**
45670	75TH AVE	MIDVALE RD	OLMSTEAD CT	Local	Asphalt	29	554	89	1874	57	47	80	Strng	Fair	14	30	**52.6**
49980	75TH AVE	W NOB HILL BLVD	WESTBROOK LP (N)	Local	Asphalt	31	641	110	2,318	76	66	80	Strng	V Good	0	24	**72**
50940	75TH AVE	WESTBROOK LP (N)	DS@309S WESTBROOK LP (N)	Local	Asphalt	29	309	50	1,045	73	69	60	Mod	V Good	5	22	**71**
51490	75TH AVE	DS@309S WESTBROOK LP (N)	WESTBROOK LP (S)	Local	Asphalt	30	262	44	917	74	81	60	Mod	V Good	5	21	**75.5**
51850	75TH AVE	WESTBROOK LP (S)	W VIOLA AVE	Local	Asphalt	30	121	20	424	65	47	80	Strng	Fair	0	35	**59**
52160	75TH AVE	W VIOLA AVE	SE END	Local	Asphalt	28	516	80	1686	67	44	80	Strng	Fair	8	25	**58.5**
55510	75TH AVE	NORTH END	W MEAD AVE	Local	Asphalt	28	401	62	1,310	62	65	80	Strng	Good	11	27	**62**
58440	75TH AVE	W MEAD AVE	ZIER RD	Local	Asphalt	35	1,330	259	5,431	62	67	80	Strng	Good	10	25	**63**
61450	75TH AVE	NORTH END	CROWN CREST WY	Local	Asphalt	29	144	23	487	82	63	60	Mod	V Good	0	18	**74.4**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
75950	75TH AVE	CRESTFIELDS RD	LYONS LN	Local	Asphalt	29	371	60	1255	90	70	60	Mod	V Good	0	10	**82.8**
75960	75TH AVE	LYONS LN	SOUTH END	Local	Asphalt	28	168	26	549	86	67	60	Mod	V Good	0	14	**79**
35200	75TH PL	NORTH END	W WALNUT ST	Local	Asphalt	37	381	78	1,645	61	46	80	Strng	Fair	10	29	**55**
21330	76TH AVE	SOUTH END	W LINCOLN AVE	Local	Asphalt	20	409	45	954	38	36	80	Strng	Poor	35	27	**36**
25150	76TH AVE	SUMMITVIEW AVE	SKYLINE WY	Local	Asphalt	31	507	87	1,834	79	60	60	Mod	V Good	7	14	**72**
28620	76TH AVE	S 76TH AVE	BARGE CT	Local	Asphalt	29	95	15	321	62	56	80	Strng	Good	3	35	**59**
28200	76TH AVE	BARGE CT	CASCADE CT	Local	Asphalt	32	257	46	959	49	63	80	Strng	Fair	12	39	**52.6**
26940	76TH AVE	CASCADE CT	SUMMITVIEW AVE	Local	Asphalt	32	292	52	1090	60	39	80	Strng	Fair	17	23	**52**
29180	76TH AVE	N 76TH AVE	FARM COUNTRY CT	Local	Asphalt	30	143	24	501	65	60	80	Strng	Good	8	28	**62**
30020	76TH AVE	FARM COUNTRY CT	SOUTH END	Local	Asphalt	29	146	24	494	56	47	80	Strng	Fair	17	27	**52**
31540	76TH AVE	NORTH END	W CHESTNUT AVE	Local	Asphalt	29	208	34	704	62	69	60	Mod	Good	17	21	**63.2**
33130	76TH AVE	W CHESTNUT AVE	DS@194S W CHESTNUT AVE	Local	Asphalt	30	194	32	679	56	78	60	Mod	Good	13	30	**63**
35160	76TH AVE	DS@194S W CHESTNUT AVE	PRIVATE RD	Local	Asphalt	29	559	90	1891	58	66	80	Strng	Good	13	30	**59.6**
37700	76TH AVE	PRIVATE RD	TIETON DR	Local	Asphalt	30	607	101	2,125	49	55	80	Strng	Fair	17	34	**50**
45600	76TH AVE	MIDVALE RD	OLMSTEAD CT	Local	Asphalt	28	542	84	1771	81	63	60	Mod	V Good	0	19	**74.2**
47170	76TH AVE	WESTBROOK PL	GARDEN AVE	Local	Asphalt	29	237	38	802	52	55	60	Mod	Fair	22	26	**52**
71000	76TH AVE	NORTH END	FREMONT WY	Local	Asphalt	29	381	61	1289	87	68	60	Mod	V Good	4	9	**80.1**
70970	76TH AVE	FREMONT WY	W WASHINGTON AVE	Local	Asphalt	30	265	44	928	88	69	60	Mod	V Good	0	12	**81**
71010	76TH AVE	W WASHINGTON AVE	WHATCOM AVE	Local	Asphalt	30	331	55	1,159	89	70	60	Mod	V Good	4	6	**82**
71300	76TH AVE	WHATCOM AVE	WHITMAN ST	Local	Asphalt	28	297	46	970	97	88	60	Mod	Excellent	0	3	**93**
71330	76TH AVE	CROWN CREST AVE	WHITMAN ST	Local	Asphalt	29	386	62	1,306	85	77	60	Mod	V Good	0	15	**82**
71350	76TH AVE	WHITMAN ST	COOLIDGE RD	Local	Asphalt	29	164	26	555	89	70	60	Mod	V Good	0	11	**82**
74860	76TH AVE	COOLIDGE RD	CRESTFIELDS RD	Local	Asphalt	29	199	32	673	57	31	80	Strng	Marginal	5	38	**47**
71360	76TH AVE	CRESTFIELDS RD	LYONS LN	Local	Asphalt	27	349	52	1,099	51	51	80	Strng	Fair	17	32	**50**
18010	77TH AVE	RICHEY RD	GLACIER WY	Local	Asphalt	30	283	47	991	64	36	80	Strng	Fair	14	22	**53**
16840	77TH AVE	GLACIER WY	JACKSON CT	Local	Asphalt	32	332	59	1,239	61	54	80	Strng	Fair	16	23	**58**
15620	77TH AVE	JACKSON CT	DOUGLAS DR	Local	Asphalt	29	330	53	1117	61	56	80	Strng	Fair	6	34	**58**
13900	77TH AVE	DOUGLAS DR	ENGLEWOOD AVE	Local	Asphalt	32	165	29	616	64	44	80	Strng	Fair	5	31	**56**
25110	77TH AVE	SUMMITVIEW AVE	SKYLINE WY	Local	Asphalt	32	511	91	1,908	63	48	80	Strng	Fair	5	31	**57**
30200	77TH AVE	W YAKIMA AVE	W BARGE ST	Local	Asphalt	36	333	67	1,399	69	62	80	Strng	Good	0	31	**66**
28530	77TH AVE	W BARGE ST	SUMMITVIEW AVE	Local	Asphalt	35	644	125	2,630	66	61	80	Strng	Good	8	27	**63**
31950	77TH AVE	N 77TH AVE	W CHESTNUT AVE	Local	Asphalt	35	340	66	1,388	70	59	80	Strng	Good	4	27	**65**
33420	77TH AVE	W CHESTNUT AVE	SOUTH END	Local	Asphalt	42	194	45	953	62	32	80	Strng	Fair	8	30	**52**
45500	77TH AVE	MIDVALE RD	OLMSTEAD CT	Local	Asphalt	29	520	84	1759	64	70	80	Strng	Good	8	29	**65**
63460	77TH AVE	EASY ST	OCCIDENTAL RD	Local	Asphalt	29	498	80	1,685	73	64	80	Strng	Good	5	23	**69**
13290	78TH AVE	ENGLEWOOD AVE	GRAYSTONE CT	Local	Asphalt	30	375	63	1,313	54	45	80	Strng	Fair	19	28	**50**
17800	78TH AVE	RICHEY RD	ALEXANDRIA CT	Local	Asphalt	31	525	90	1,899	67	68	60	Mod	Good	8	25	**66**
15910	78TH AVE	ALEXANDRIA CT	DOUGLAS DR	Local	Asphalt	31	312	54	1,128	57	59	80	Strng	Fair	6	36	**57**
25080	78TH AVE	SUMMITVIEW AVE	NORTH END	Local	Asphalt	35	543	104	2,194	55	41	80	Strng	Fair	8	36	**50**
31860	78TH AVE	W CHESTNUT AVE	DS@489N W CHESTNUT AVE	Local	Asphalt	34	489	92	1,940	71	60	80	Strng	Good	5	24	**67**
29570	78TH AVE	DS@489N W CHESTNUT AVE	SUMMITVIEW AVE	Local	Asphalt	31	846	146	3060	63	64	80	Strng	Good	5	32	**62.2**
34300	78TH AVE	W CHESTNUT AVE	SOUTH END	Local	Asphalt	38	487	103	2163	75	54	60	Mod	Good	8	17	**67.1**
47710	78TH AVE	GARDEN AVE	W NOB HILL BLVD	Local	Asphalt	33	283	52	1090	67	52	80	Strng	Good	5	28	**61.4**
73110	78TH AVE	W PLATH AVE	W MEAD AVE	Local	Asphalt	29	306	49	1035	62	59	80	Strng	Good	12	26	**59.9**
75440	78TH AVE	FREMONT WY	W WASHINGTON AVE	Local	Asphalt	28	307	48	1,003	70	47	80	Strng	Good	8	22	**61**
75430	78TH AVE	W WASHINGTON AVE	WHATCOM AVE	Local	Asphalt	30	328	55	1148	85	66	60	Mod	V Good	0	15	**77.8**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
75920	78TH AVE	COOLIDGE RD	CRESTFIELDS RD	Local	Asphalt	26	166	24	504	95	85	60	Mod	Excellent	0	5	**91.2**
75930	78TH AVE	CRESTFIELDS RD	LYONS LN	Local	Asphalt	27	389	58	1,225	85	66	60	Mod	V Good	7	8	**78**
63420	78TH AVE	EASY ST	OCCIDENTAL RD	Local	Asphalt	28	476	74	1555	75	69	80	Strng	V Good	0	25	**72.5**
45480	78TH CT	NORTH END	OLMSTEAD CT	Local	Asphalt	43	170	40	846	61	40	80	Strng	Fair	10	29	**53.2**
45470	79TH AVE	MIDVALE RD	OLMSTEAD CT	Local	Asphalt	28	545	85	1780	66	68	60	Mod	Good	9	25	**65.9**
47160	79TH AVE	WESTBROOK PL	GARDEN AVE	Local	Asphalt	30	228	38	798	45	51	80	Strng	Marginal	26	30	**46**
74520	79TH AVE	W PLATH AVE	W MEAD AVE	Local	Asphalt	30	278	46	973	54	50	80	Strng	Fair	17	29	**52**
75850	79TH AVE	CRESTFIELDS RD	LYONS LN	Local	Asphalt	27	390	59	1,229	88	69	60	Mod	V Good	0	12	**81**
63860	79TH AVE	OCCIDENTAL RD	HOPE LN	Local	Asphalt	29	415	67	1404	64	48	80	Strng	Fair	6	30	**57.7**
22650	7TH AVE	PIERCE AVE	W MARTIN LUTHER KING JR BLVD	Truck Route	Asphalt	35	105	20	429	93	78	60	Mod	Excellent	0	7	**87.1**
26320	7TH AVE	DS@79N SUMMITVIEW AVE	W A ST	Local	Asphalt	36	308	62	1,294	58	47	80	Strng	Fair	15	27	**54**
24420	7TH AVE	W A ST	PIERCE AVE	Local	Asphalt	37	415	85	1,791	52	57	80	Strng	Fair	18	30	**53**
26680	7TH AVE	SUMMITVIEW AVE	DS@79N SUMMITVIEW AVE	Local	Asphalt	32	79	14	295	52	33	80	Strng	Marginal	8	40	**45**
28160	7TH AVE	W YAKIMA AVE	DS@193S W YAKIMA AVE	Minor Arterial	Asphalt	31	193	33	698	74	53	60	Mod	Good	11	15	**65**
29450	7TH AVE	DS@193S W YAKIMA AVE	W CHESTNUT AVE	Minor Arterial	Asphalt	31	299	51	1,081	82	64	60	Mod	V Good	0	18	**75**
31500	7TH AVE	W CHESTNUT AVE	W WALNUT ST	Minor Arterial	Asphalt	30	480	80	1,680	78	58	60	Mod	V Good	7	15	**70**
37730	7TH AVE	W PINE ST	TIETON DR	Local	Asphalt	37	484	99	2,089	77	57	60	Mod	V Good	11	12	**70**
39440	7TH AVE	TIETON DR	DIVISION ST	Local	Asphalt	31	242	42	875	73	51	60	Mod	Good	10	18	**64**
40820	7TH AVE	DIVISION ST	PEACH ST	Local	Asphalt	31	461	79	1,667	87	68	60	Mod	V Good	0	13	**80**
43560	7TH AVE	PEACH ST	DS@570S PEACH ST	Local	Asphalt	30	570	95	1,995	90	70	60	Mod	V Good	3	7	**83**
44530	7TH AVE	DS@570S PEACH ST	SOUTH END	Local	Asphalt	30	253	42	886	91	75	60	Mod	Excellent	0	9	**85**
50540	7TH AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	30	668	111	2338	80	61	60	Mod	V Good	6	15	**72.3**
52660	7TH AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	30	660	110	2,310	74	53	80	Strng	Good	5	21	**66**
54770	7TH AVE	W VIOLA AVE	W LOGAN AVE	Local	Asphalt	31	663	114	2,398	65	51	60	Mod	Good	16	18	**59**
55990	7TH AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	31	650	112	2351	80	61	60	Mod	V Good	7	14	**72.3**
57080	7TH AVE	W MEAD AVE	DS@414S W MEAD AVE	Local	Asphalt	26	414	60	1,256	100	90	60	Mod	Excellent	0	0	**96**
57660	7TH AVE	DS@414S W MEAD AVE	W KING ST	Local	Asphalt	22	258	32	662	75	55	60	Mod	Good	14	10	**67.3**
58890	7TH AVE	W KING ST	W PIERCE ST	Local	Asphalt	24	657	88	1840	76	56	60	Mod	Good	13	11	**68.2**
59310	7TH AVE	W PIERCE ST	DS@210S W PIERCE ST	Local	Asphalt	26	210	30	637	77	57	60	Mod	V Good	9	14	**70**
59810	7TH AVE	DS@210S W PIERCE ST	DS@515S W PIERCE ST	Local	Asphalt	24	305	41	854	78	59	60	Mod	V Good	8	14	**70.6**
59970	7TH AVE	DS@515S W PIERCE ST	SPOKANE ST	Local	Asphalt	24	122	16	342	100	90	60	Mod	Excellent	0	0	**96**
60380	7TH AVE	SPOKANE ST	FREMONT ST	Local	Asphalt	23	407	52	1,092	94	83	60	Mod	Excellent	6	0	**89**
7200	7TH ST	E G ST	DS@239N E G ST	Local	Concrete	34	239	45	948	37	32	60	Mod	Poor	0	0	**34.8**
6800	7TH ST	DS@239N E G ST	E H ST	Local	Concrete	32	248	44	926	47	28	60	Mod	Marginal	0	0	**39.9**
6040	7TH ST	E H ST	NORTH END	Local	Asphalt	54	101	30	636	46	11	80	Strng	Poor	20	34	**33.1**
12690	7TH ST	E LINCOLN AVE	E D ST	Local	Concrete	31	480	83	1736	34	33	60	Mod	Poor	0	0	**33.4**
11340	7TH ST	E D ST	E E ST	Local	Concrete	32	480	85	1792	34	38	60	Mod	Poor	0	0	**34.2**
10030	7TH ST	E E ST	E F ST	Local	Concrete	31	479	82	1,732	51	37	60	Mod	Marginal	0	0	**45**
8510	7TH ST	E F ST	E G ST	Local	Concrete	32	479	85	1,788	26	32	60	Mod	Poor	0	0	**27**
14770	7TH ST	E MARTIN LUTHER KING JR BLVD	E LINCOLN AVE	Local	Concrete	31	475	82	1,718	53	39	60	Mod	Marginal	0	0	**48**
15920	7TH ST	SOUTH END	E MARTIN LUTHER KING JR BLVD	Local	Concrete	37	279	58	1211	65	39	60	Mod	Fair	0	0	**55.8**
21070	7TH ST	E YAKIMA AVE	E CHESTNUT AVE	Local	Asphalt	39	487	106	2216	49	47	60	Mod	Marginal	28	23	**47**
22710	7TH ST	E CHESTNUT AVE	E WALNUT ST	Local	Asphalt	37	480	99	2072	59	54	80	Strng	Fair	13	28	**56.3**
24570	7TH ST	E WALNUT ST	E SPRUCE ST	Local	Asphalt	39	479	104	2,179	42	62	60	Mod	Marginal	30	28	**47**
27290	7TH ST	E SPRUCE ST	E PINE ST	Local	Asphalt	38	483	102	2,141	62	59	80	Strng	Good	14	25	**60**
29510	7TH ST	E PINE ST	E MAPLE ST	Local	Asphalt	37	481	99	2,076	53	52	80	Strng	Fair	21	25	**52**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
31530	7TH ST	E MAPLE ST	E BEECH ST	Local	Asphalt	38	481	102	2,132	62	55	60	Mod	Fair	16	22	**59**
34110	7TH ST	E BEECH ST	E RACE ST	Local	Asphalt	38	480	101	2128	82	72	60	Mod	V Good	1	18	**77.5**
37030	7TH ST	E RACE ST	E ADAMS ST	Local	Asphalt	30	697	116	2,440	79	62	60	Mod	V Good	6	15	**72**
39630	7TH ST	E ADAMS ST	PACIFIC AVE	Local	Asphalt	31	464	80	1,678	84	65	60	Mod	V Good	0	16	**77**
41100	7TH ST	PACIFIC AVE	RAINIER ST	Local	Asphalt	29	487	78	1,648	78	60	60	Mod	V Good	6	17	**71**
42880	7TH ST	RAINIER ST	LA SALLE ST	Local	Asphalt	24	459	61	1285	77	64	80	Strng	V Good	1	22	**72.3**
45140	7TH ST	LA SALLE ST	E ARLINGTON ST	Local	Asphalt	23	385	49	1033	78	58	80	Strng	V Good	0	22	**70.6**
46920	7TH ST	E ARLINGTON ST	CENTRAL AVE	Local	Asphalt	31	649	112	2347	43	43	80	Strng	Marginal	27	29	**42**
49300	7TH ST	CENTRAL AVE	E NOB HILL BLVD	Local	Asphalt	30	660	110	2310	74	52	80	Strng	Good	0	26	**65.7**
50950	7TH ST	E NOB HILL BLVD	WILSON LN	Truck Route	Asphalt	20	699	78	1631	72	51	80	Strng	Good	8	20	**64.2**
15300	80TH AVE	SOUTH END	ENGLEWOOD AVE	Local	Asphalt	38	424	90	1,880	76	57	80	Strng	Good	5	19	**69**
13280	80TH AVE	ENGLEWOOD AVE	AMERICAN LN	Local	Asphalt	37	345	71	1489	74	55	60	Mod	Good	13	14	**66.2**
12360	80TH AVE	AMERICAN LN	SCENIC DR	Local	Asphalt	37	983	202	4243	76	67	60	Mod	V Good	10	15	**71.9**
69990	80TH AVE	ENGLEWOOD CREST DR	DS@179E ENGLEWOOD CREST DR	Local	Asphalt	24	179	24	501	77	57	60	Mod	V Good	8	15	**69.6**
18930	80TH AVE	DS@179E ENGLEWOOD CREST DR	DS@483N ENGLEWOOD CREST DR	Local	Asphalt	22	305	37	783	84	65	60	Mod	V Good	4	12	**77.1**
17490	80TH AVE	DS@483N ENGLEWOOD CREST DR	ENGLEWOOD CREST DR	Local	Asphalt	23	196	25	526	66	39	80	Strng	Fair	7	27	**56**
25040	80TH AVE	SUMMITVIEW AVE	IVY CT	Local	Asphalt	38	205	43	909	82	63	60	Mod	V Good	9	9	**75**
24010	80TH AVE	IVY CT	SKYLINE WY	Local	Asphalt	30	269	45	942	91	82	60	Mod	Excellent	0	9	**87.4**
22830	80TH AVE	SKYLINE WY	POPLAR VIEW WY	Local	Asphalt	28	312	49	1019	29	40	80	Strng	Poor	27	30	**31.9**
74900	80TH AVE	TIETON DR	S 81ST PL	Minor Arterial	Asphalt	35	379	74	1,548	66	63	80	Strng	Good	8	27	**63**
43680	80TH AVE	S 81ST PL	MIDVALE RD	Minor Arterial	Asphalt	32	974	173	3636	55	64	80	Strng	Fair	14	31	**56.3**
46250	80TH AVE	MIDVALE RD	WESTBROOK AVE	Minor Arterial	Asphalt	25	835	116	2,435	73	70	60	Mod	V Good	10	17	**71**
47680	80TH AVE	WESTBROOK AVE	W NOB HILL BLVD	Minor Arterial	Asphalt	32	485	86	1,811	66	67	60	Mod	Good	15	19	**65**
49510	80TH AVE	W NOB HILL BLVD	DS@321S W NOB HILL BLVD	Major Collector	Asphalt	32	321	57	1,198	85	77	60	Mod	V Good	3	12	**82**
49960	80TH AVE	DS@321S W NOB HILL BLVD	UNNAMED - 49970	Major Collector	Asphalt	32	331	59	1236	73	86	60	Mod	V Good	11	16	**76.6**
51810	80TH AVE	UNNAMED - 49970	WIDE HOLLOW RD	Major Collector	Asphalt	25	667	93	1945	68	80	60	Mod	V Good	4	28	**71.5**
55080	80TH AVE	WIDE HOLLOW RD	W PLATH AVE	Major Collector	Asphalt	28	1,004	156	3,280	57	54	80	Strng	Fair	17	26	**55**
55480	80TH AVE	W PLATH AVE	DS@338S W PLATH AVE	Major Collector	Asphalt	29	338	54	1,144	43	66	80	Strng	Fair	19	38	**49**
56530	80TH AVE	DS@338S W PLATH AVE	LOREN PL	Major Collector	Asphalt	32	275	49	1,027	57	70	60	Mod	Good	16	27	**60**
57060	80TH AVE	LOREN PL	W KING ST	Major Collector	Asphalt	31	317	55	1146	52	61	60	Mod	Fair	21	27	**53.5**
58360	80TH AVE	W KING ST	ZIER RD	Major Collector	Asphalt	32	731	130	2729	31	60	80	Strng	Marginal	34	35	**39.6**
63200	80TH AVE	COOLIDGE RD	LYONS LN	Major Collector	Asphalt	22	558	68	1,432	41	50	80	Strng	Marginal	18	40	**43**
75900	80TH AVE	LYONS LN	EASY ST	Major Collector	Asphalt	23	338	43	907	57	57	80	Strng	Fair	13	30	**56**
63450	80TH AVE	EASY ST	OCCIDENTAL RD	Major Collector	Asphalt	29	455	73	1539	54	57	80	Strng	Fair	18	28	**53.8**
63840	80TH AVE	NORTH END	HOPE LN	Local	Asphalt	43	282	67	1407	63	54	80	Strng	Good	5	32	**59.1**
25020	81ST AVE	SUMMITVIEW AVE	BROWNE AVE	Local	Asphalt	33	275	50	1059	19	54	80	Strng	Poor	26	29	**29.4**
23810	81ST AVE	BROWNE AVE	NORTH END	Local	Asphalt	42	241	56	1,181	34	36	80	Strng	Poor	0	34	**33**
34400	81ST AVE	S 82ND AVE	DS@479E S 82ND AVE	Local	Asphalt	30	479	80	1677	80	70	60	Mod	V Good	0	20	**75.9**
37460	81ST AVE	DS@479E S 82ND AVE	TIETON DR	Local	Asphalt	28	802	125	2620	51	67	80	Strng	Fair	8	41	**55.2**
74910	81ST PL	NW END	S 80TH AVE	Local	Asphalt	27	384	58	1210	62	36	80	Strng	Fair	10	28	**52.3**
34210	82ND AVE	S 81ST AVE	JOYCE PL	Local	Asphalt	29	257	41	870	67	72	80	Strng	Good	0	33	**68**
37530	82ND AVE	JOYCE PL	TIETON DR	Local	Asphalt	29	878	141	2,971	55	67	80	Strng	Fair	11	34	**58**
42460	83RD AVE	TIETON DR	SOUTH END	Local	Asphalt	33	1,120	206	4,316	68	69	60	Mod	Good	8	25	**67**
46200	83RD AVE	NORTH END	WESTBROOK AVE	Local	Asphalt	29	266	43	900	66	43	80	Strng	Fair	14	20	**57**
24970	84TH AVE	SUMMITVIEW AVE	DS@465N SUMMITVIEW AVE	Local	Asphalt	35	465	90	1,899	62	75	60	Mod	Good	13	25	**65**
23160	84TH AVE	DS@465N SUMMITVIEW AVE	HAWTHORNE DR	Local	Asphalt	30	350	58	1,225	64	82	60	Mod	Good	11	25	**69**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
21700	84TH AVE	HAWTHORNE DR	DS@764N HAWTHORNE DR	Local	Asphalt	30	764	127	2,674	75	84	60	Mod	V Good	7	18	**77**
18230	84TH AVE	DS@764N HAWTHORNE DR	VIEWCREST WY	Local	Asphalt	31	634	109	2293	64	70	60	Mod	Good	12	24	**64.7**
24910	85TH AVE	SUMMITVIEW AVE	KAIL DR	Local	Asphalt	31	489	84	1,769	50	48	80	Strng	Marginal	18	31	**49**
22800	85TH AVE	KAIL DR	DS@153N KAIL DR	Local	Asphalt	32	153	27	571	63	73	80	Strng	Good	7	30	**65.4**
22370	85TH AVE	DS@153N KAIL DR	HAWTHORNE DR	Local	Asphalt	32	181	32	676	35	43	80	Strng	Poor	30	35	**36.6**
26820	85TH AVE	ALPINE WY	SUMMITVIEW AVE	Local	Asphalt	31	330	57	1,194	73	51	80	Strng	Good	3	24	**65**
31570	85TH AVE	SOUTH END	W BARGE ST	Local	Asphalt	32	643	114	2401	68	79	60	Mod	V Good	8	24	**70.9**
28580	85TH AVE	W BARGE ST	ALPINE WY	Local	Asphalt	30	364	61	1,274	68	65	80	Strng	Good	4	28	**66**
44120	85TH AVE	NORTH END	MIDVALE RD	Local	Asphalt	29	129	21	436	68	48	80	Strng	Good	0	32	**61**
45430	85TH AVE	MIDVALE RD	W ARLINGTON AVE	Local	Asphalt	28	257	40	840	68	59	80	Strng	Good	1	31	**65**
45870	85TH AVE	W ARLINGTON AVE	GROVE AVE	Local	Asphalt	28	270	42	882	72	62	80	Strng	Good	5	23	**68**
47020	85TH AVE	GROVE AVE	WESTBROOK AVE	Local	Asphalt	28	260	40	849	54	51	80	Strng	Fair	21	25	**52**
47330	85TH AVE	WESTBROOK AVE	GARDEN AVE	Local	Asphalt	29	228	37	771	75	70	80	Strng	V Good	1	25	**72.5**
75470	85TH AVE	GARDEN AVE	SOUTH END	Local	Asphalt	29	116	19	392	39	31	80	Strng	Poor	31	30	**35.4**
63960	85TH AVE	S 86TH AVE	OCCIDENTAL RD	Local	Asphalt	21	844	98	2,068	80	61	60	Mod	V Good	6	14	**73**
33500	85TH PL	NE END	WOODWINDS WY	Local	Asphalt	45	146	37	767	66	54	80	Strng	Good	8	26	**61**
34890	85TH PL	WOODWINDS WY	86TH PL	Local	Asphalt	29	530	85	1,793	72	74	80	Strng	V Good	0	28	**72**
23590	86TH AVE	JUANITA DR	KAIL DR	Local	Asphalt	24	139	19	389	85	66	60	Mod	V Good	4	11	**78**
31510	86TH AVE	SOUTH END	W BARGE ST	Local	Asphalt	33	642	118	2,484	70	59	80	Strng	Good	4	26	**65**
28550	86TH AVE	W BARGE ST	NORTH END	Local	Asphalt	30	477	80	1,670	67	54	80	Strng	Good	8	25	**61**
63970	86TH AVE	OCCIDENTAL RD	S 85TH AVE	Major Collector	Asphalt	28	617	96	2016	52	50	60	Mod	Fair	26	22	**50**
64060	86TH AVE	S 85TH AVE	DS@310S S 85TH AVE	Major Collector	Asphalt	24	310	41	868	30	51	60	Mod	Poor	42	28	**35.7**
64260	86TH AVE	DS@310S S 85TH AVE	OAK AVE	Major Collector	Asphalt	25	300	42	875	36	59	80	Strng	Marginal	31	33	**42**
64520	86TH AVE	OAK AVE	ASPEN RD	Major Collector	Asphalt	24	439	59	1229	59	60	80	Strng	Fair	15	27	**58**
64930	86TH AVE	ASPEN RD	AHTANUM RD	Major Collector	Asphalt	32	364	65	1,359	43	41	80	Strng	Marginal	20	37	**41**
35860	86TH PL	S 85TH PL	SE END	Local	Asphalt	41	282	65	1,360	60	63	80	Strng	Good	12	28	**60**
34900	86TH PL	WOODWINDS WY	S 85TH PL	Local	Asphalt	32	490	87	1,829	68	69	80	Strng	Good	4	27	**68**
28380	87TH AVE	W BARGE ST	SUMMITVIEW AVE	Local	Asphalt	31	627	108	2,268	67	58	80	Strng	Good	4	29	**63**
39980	87TH AVE	TIETON DR	MACLAREN AVE	Local	Asphalt	34	376	71	1491	66	61	80	Strng	Good	0	34	**63.7**
42760	87TH AVE	WEBSTER AVE	BRISTOL WY	Local	Asphalt	29	346	56	1171	59	69	80	Strng	Good	8	33	**61.4**
44240	87TH AVE	BRISTOL WY	MIDVALE RD	Local	Asphalt	29	283	46	957	59	74	80	Strng	Good	7	34	**63.2**
34650	87TH PL	WOODWINDS WY	SOUTH END	Local	Asphalt	35	394	77	1,619	63	55	80	Strng	Good	6	30	**60**
71870	88TH AVE	KAIL DR	NW END	Local	Asphalt	16	250	22	467	64	35	80	Strng	Fair	16	20	**53.2**
24890	88TH AVE	SUMMITVIEW AVE	JUANITA DR	Local	Asphalt	24	341	45	955	80	61	60	Mod	V Good	3	17	**72.5**
31760	88TH AVE	W CHESTNUT AVE	W YAKIMA AVE	Major Collector	Asphalt	25	324	45	945	55	65	80	Strng	Fair	11	34	**56.9**
30220	88TH AVE	W YAKIMA AVE	W BARGE ST	Major Collector	Asphalt	25	327	45	954	55	76	80	Strng	Good	11	34	**60.7**
28700	88TH AVE	W BARGE ST	ALPINE CT	Major Collector	Asphalt	35	303	59	1237	56	68	80	Strng	Good	14	30	**59.1**
27200	88TH AVE	ALPINE CT	SUMMITVIEW AVE	Major Collector	Asphalt	36	369	74	1550	55	61	80	Strng	Fair	14	31	**55.8**
33380	88TH AVE	N 88TH AVE	WOODWINDS WY	Major Collector	Asphalt	25	198	28	578	60	65	60	Mod	Good	19	21	**60.4**
37610	88TH AVE	WOODWINDS WY	TIETON DR	Major Collector	Asphalt	26	1128	163	3422	50	64	60	Mod	Fair	24	26	**53.5**
42060	88TH AVE	MACLAREN AVE	WEBSTER AVE	Local	Asphalt	34	368	70	1460	70	63	80	Strng	Good	0	30	**67.3**
44150	88TH AVE	WEBSTER AVE	MIDVALE RD	Local	Asphalt	34	552	104	2,190	72	77	60	Mod	V Good	7	21	**72**
45450	88TH AVE	MIDVALE RD	W ARLINGTON AVE	Local	Asphalt	34	260	49	1,031	83	64	60	Mod	V Good	0	17	**76**
45960	88TH AVE	W ARLINGTON AVE	GROVE AVE	Local	Asphalt	35	270	53	1,103	82	67	60	Mod	V Good	3	15	**76**
47060	88TH AVE	GROVE AVE	WESTBROOK AVE	Local	Asphalt	34	257	49	1,019	68	51	60	Mod	Good	17	15	**61**
47320	88TH AVE	WESTBROOK AVE	GARDEN AVE	Local	Asphalt	34	227	43	900	82	69	60	Mod	V Good	7	11	**77**



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
47700	88TH AVE	GARDEN AVE	SOUTH END	Local	Asphalt	33	164	30	631	84	66	60	Mod	V Good	0	16	**77**
73190	88TH AVE	DS@1934E NW END	COOLIDGE RD	Local	Asphalt	29	668	108	2,260	50	56	80	Strng	Fair	22	28	**51**
62850	88TH AVE	COOLIDGE RD	BRAEBURN LP	Local	Asphalt	30	447	75	1,565	86	67	60	Mod	V Good	0	15	**79**
62930	88TH AVE	BRAEBURN LP	BRAEBURN LP	Local	Asphalt	30	350	58	1,225	85	66	60	Mod	V Good	0	15	**78**
63520	88TH AVE	BRAEBURN LP	OCCIDENTAL RD	Local	Asphalt	35	556	108	2,270	83	71	60	Mod	V Good	9	9	**78**
76020	89TH AVE	SUMMITVIEW AVE	JUANITA DR	Other	Asphalt	29	309	50	1,045	100	90	60	Mod	Excellent	0	0	**96**
76010	89TH AVE	JUANITA DR	KAIL DR	Other	Asphalt	30	239	40	837	100	90	60	Mod	Excellent	0	0	**95.6**
76000	89TH AVE	KAIL DR	NORTH END	Other	Asphalt	29	119	19	403	100	90	60	Mod	Excellent	0	0	**96**
27470	89TH AVE	SUMMITVIEW AVE	SOUTH END	Local	Asphalt	38	400	84	1,765	61	35	80	Strng	Fair	10	29	**52**
34250	89TH AVE	W CHESTNUT AVE	MARGARET CT	Local	Asphalt	30	500	83	1,750	72	51	80	Strng	Good	6	22	**64**
35380	89TH AVE	MARGARET CT	S 90TH AVE	Local	Asphalt	30	332	55	1,162	67	41	80	Strng	Fair	9	24	**57**
43730	89TH AVE	WEBSTER AVE	MIDVALE RD	Local	Asphalt	29	359	58	1,215	68	69	80	Strng	Good	4	28	**68**
44170	89TH AVE	MIDVALE RD	MIDVALE RD	Local	Asphalt	29	111	18	376	75	74	80	Strng	V Good	0	25	**74**
45910	89TH AVE	MIDVALE RD	GROVE AVE	Local	Asphalt	28	523	81	1,708	49	61	60	Mod	Fair	28	23	**52**
47080	89TH AVE	GROVE AVE	WESTBROOK AVE	Local	Asphalt	28	261	41	853	58	65	80	Strng	Good	10	31	**60**
47270	89TH AVE	WESTBROOK AVE	GARDEN AVE	Local	Asphalt	29	247	40	836	58	49	80	Strng	Fair	16	26	**53.8**
6070	8TH AVE	HATHAWAY ST	W J ST	Local	Asphalt	33	313	57	1205	69	59	80	Strng	Good	8	23	**64.7**
27790	8TH AVE	W YAKIMA AVE	DS@153N W YAKIMA AVE	Local	Asphalt	31	153	26	553	66	40	80	Strng	Fair	9	25	**56**
27050	8TH AVE	DS@153N W YAKIMA AVE	SUMMITVIEW AVE	Local	Asphalt	31	170	29	615	63	34	80	Strng	Fair	14	23	**53**
28650	8TH AVE	W YAKIMA AVE	DS@187S W YAKIMA AVE	Local	Concrete	30	187	31	655	51	24	60	Mod	Marginal	0	0	**41.1**
30080	8TH AVE	DS@187S W YAKIMA AVE	W CHESTNUT AVE	Local	Concrete	30	304	51	1064	36	37	60	Mod	Poor	0	0	**35.4**
32290	8TH AVE	W CHESTNUT AVE	W WALNUT ST	Local	Concrete	31	480	83	1736	62	42	60	Mod	Fair	0	0	**54.6**
34550	8TH AVE	W WALNUT ST	W SPRUCE ST	Local	Asphalt	30	480	80	1680	36	45	80	Strng	Poor	31	27	**38.1**
36570	8TH AVE	W SPRUCE ST	W PINE ST	Local	Asphalt	31	482	83	1743	34	47	60	Mod	Poor	38	28	**37.2**
38290	8TH AVE	W PINE ST	TIETON DR	Local	Asphalt	31	484	83	1750	77	57	60	Mod	V Good	9	14	**69.1**
39450	8TH AVE	TIETON DR	DIVISION ST	Local	Asphalt	27	112	17	353	64	35	80	Strng	Fair	18	19	**52.9**
40870	8TH AVE	DIVISION ST	PEACH ST	Local	Asphalt	28	463	72	1512	52	51	60	Mod	Fair	30	18	**50.3**
43280	8TH AVE	PEACH ST	SAINT HELENS ST	Local	Asphalt	29	522	84	1766	78	59	60	Mod	V Good	8	14	**70.6**
44480	8TH AVE	SAINT HELENS ST	SOUTH END	Local	Asphalt	29	288	46	974	38	52	80	Strng	Marginal	32	30	**41.7**
46770	8TH AVE	NORTH END	STEWART ST	Local	Asphalt	30	306	51	1071	75	54	80	Strng	Good	5	20	**67.1**
47390	8TH AVE	STEWART ST	BLACKBURN ST	Local	Asphalt	23	324	41	869	76	56	60	Mod	Good	8	16	**68.5**
48730	8TH AVE	BLACKBURN ST	W NOB HILL BLVD	Local	Asphalt	18	340	34	714	66	39	80	Strng	Fair	16	18	**55.8**
50380	8TH AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	31	663	114	2398	81	66	60	Mod	V Good	6	13	**75**
52640	8TH AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	31	664	114	2401	63	48	80	Strng	Fair	14	23	**56.9**
54660	8TH AVE	W VIOLA AVE	W LOGAN AVE	Local	Asphalt	30	658	110	2303	58	41	60	Mod	Fair	24	18	**50.6**
56050	8TH AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	30	657	110	2,300	75	66	60	Mod	V Good	12	13	**71**
57650	8TH AVE	W MEAD AVE	DS@669S W MEAD AVE	Local	Asphalt	25	669	93	1,951	75	54	60	Mod	Good	12	13	**67**
58860	8TH AVE	DS@669S W MEAD AVE	W PIERCE ST	Local	Asphalt	31	658	113	2,380	78	58	60	Mod	V Good	6	16	**70**
59320	8TH AVE	W PIERCE ST	DS@213S W PIERCE ST	Local	Asphalt	24	213	28	596	76	56	80	Strng	Good	0	24	**69**
59930	8TH AVE	DS@213S W PIERCE ST	SPOKANE ST	Local	Asphalt	21	424	49	1,039	100	90	60	Mod	Excellent	0	0	**96**
60360	8TH AVE	SPOKANE ST	FREMONT ST	Local	Asphalt	21	404	47	990	93	79	60	Mod	Excellent	7	0	**88**
61000	8TH AVE	FREMONT ST	W WASHINGTON AVE	Local	Asphalt	30	270	45	945	94	83	60	Mod	Excellent	6	0	**89**
12430	8TH ST	E LINCOLN AVE	E D ST	Major Collector	Asphalt	39	481	104	2,189	80	61	60	Mod	V Good	7	13	**73**
10860	8TH ST	E D ST	E E ST	Major Collector	Asphalt	49	478	130	2,733	51	57	80	Strng	Fair	17	32	**52**
9320	8TH ST	E E ST	E F ST	Major Collector	Asphalt	47	479	125	2,627	48	52	80	Strng	Marginal	16	32	**48**
8200	8TH ST	E F ST	E G ST	Major Collector	Asphalt	48	470	125	2,632	46	41	80	Strng	Marginal	20	34	**43**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
13800	8TH ST	E MARTIN LUTHER KING JR BLVD	E LINCOLN AVE	Principal Arterial	Asphalt	49	478	130	2733	82	64	60	Mod	V Good	4	14	**74.8**
17980	8TH ST	E YAKIMA AVE	STAFF SGT PENDLETON WAY	Principal Arterial	Asphalt	37	487	100	2,102	77	57	60	Mod	V Good	18	5	**69**
16230	8TH ST	STAFF SGT PENDLETON WAY	E MARTIN LUTHER KING JR BLVD	Principal Arterial	Asphalt	43	488	117	2448	84	65	60	Mod	V Good	9	7	**76.6**
20760	8TH ST	E YAKIMA AVE	E CHESTNUT AVE	Major Collector	Asphalt	37	490	101	2115	26	45	60	Mod	Poor	48	26	**31.1**
22350	8TH ST	E CHESTNUT AVE	E WALNUT ST	Major Collector	Asphalt	38	479	101	2124	53	52	60	Mod	Fair	27	14	**50.9**
23320	8TH ST	E WALNUT ST	E SPRUCE ST	Local	Asphalt	38	260	55	1153	46	44	80	Strng	Marginal	29	25	**44.4**
23960	8TH ST	E SPRUCE ST	E SPRUCE ST	Local	Asphalt	38	196	41	869	53	39	80	Strng	Marginal	25	22	**47.3**
28820	8TH ST	E PINE ST	E MAPLE ST	Local	Asphalt	38	397	84	1760	82	63	60	Mod	V Good	4	14	**75.2**
33860	8TH ST	NORTH END	E RACE ST	Local	Asphalt	44	289	71	1,486	72	50	60	Mod	Good	11	17	**63**
37090	8TH ST	E RACE ST	E ADAMS ST	Local	Asphalt	29	837	135	2,832	49	50	60	Mod	Marginal	28	23	**48**
39670	8TH ST	E ADAMS ST	PACIFIC AVE	Local	Asphalt	29	463	75	1,566	65	47	60	Mod	Fair	19	16	**58**
41150	8TH ST	PACIFIC AVE	RAINIER ST	Local	Asphalt	31	491	85	1,776	81	62	60	Mod	V Good	11	8	**74**
42910	8TH ST	RAINIER ST	LA SALLE ST	Local	Asphalt	30	454	76	1589	89	70	60	Mod	V Good	5	7	**81.6**
45170	8TH ST	LA SALLE ST	E ARLINGTON ST	Local	Asphalt	30	385	64	1,348	80	61	60	Mod	V Good	13	7	**73**
46950	8TH ST	CENTRAL AVE	NORTH END	Local	Asphalt	21	342	40	838	83	64	60	Mod	V Good	1	16	**76**
49330	8TH ST	CENTRAL AVE	E NOB HILL BLVD	Local	Asphalt	30	661	110	2,314	74	54	80	Strng	Good	3	23	**67**
50970	8TH ST	E NOB HILL BLVD	WILSON LN	Truck Route	Asphalt	21	699	82	1713	70	46	80	Strng	Good	8	22	**61.2**
76030	90TH AVE	SUMMITVIEW AVE	NORTH END	Other	Asphalt	30	665	111	2328	87	68	60	Mod	V Good	5	9	**79.6**
31840	90TH AVE	W CHESTNUT AVE	W YAKIMA AVE	Local	Asphalt	30	327	55	1,145	84	67	60	Mod	V Good	0	16	**78**
30250	90TH AVE	W YAKIMA AVE	W BARGE ST	Local	Asphalt	31	335	58	1,212	72	76	80	Strng	V Good	0	28	**73**
28610	90TH AVE	W BARGE ST	SUMMITVIEW AVE	Local	Asphalt	29	668	108	2,260	78	61	80	Strng	V Good	0	21	**72**
34600	90TH AVE	W CHESTNUT AVE	S 90TH AVE (CDS)	Local	Asphalt	29	591	95	2,000	66	50	80	Strng	Good	7	28	**60**
35390	90TH AVE	S 90TH AVE (CDS)	S 89TH AVE	Local	Asphalt	30	290	48	1,015	60	63	80	Strng	Good	9	31	**60**
36550	90TH AVE	S 89TH AVE	SOUTH END	Local	Asphalt	41	302	69	1447	69	64	80	Strng	Good	0	31	**66.4**
43790	90TH AVE	WEBSTER AVE	MIDVALE RD	Local	Asphalt	29	203	33	687	76	70	60	Mod	V Good	5	20	**73**
45890	90TH AVE	MIDVALE RD	GROVE AVE	Local	Asphalt	28	631	98	2,061	68	62	60	Mod	Good	10	23	**65**
47300	90TH AVE	GROVE AVE	GARDEN AVE	Local	Asphalt	29	493	79	1,668	71	63	80	Strng	Good	4	25	**67**
34960	90TH AVE (CDS)	S 90TH AVE	SW END	Local	Asphalt	62	98	34	710	62	55	80	Strng	Fair	4	34	**59**
30480	91ST AVE	W YAKIMA AVE	W BARGE ST	Local	Asphalt	30	387	65	1,355	65	50	80	Strng	Fair	0	35	**59**
28600	91ST AVE	W BARGE ST	NORTH END	Local	Asphalt	35	498	98	2,048	44	48	80	Strng	Marginal	24	32	**44**
34380	91ST AVE	W CHESTNUT AVE	SOUTH END	Local	Asphalt	25	512	71	1493	72	59	60	Mod	Good	9	19	**66.6**
45880	91ST AVE	MIDVALE RD	GROVE AVE	Local	Asphalt	30	627	105	2,195	71	66	80	Strng	Good	5	24	**69**
47280	91ST AVE	GROVE AVE	GARDEN AVE	Local	Asphalt	29	493	79	1668	60	73	60	Mod	Good	11	29	**63.5**
75480	91ST AVE	GARDEN AVE	SOUTH END	Local	Asphalt	29	127	20	430	66	61	80	Strng	Good	4	30	**63.5**
31650	92ND AVE	W CHESTNUT AVE	W YAKIMA AVE	Local	Asphalt	30	229	38	802	54	48	80	Strng	Fair	16	31	**51**
30580	92ND AVE	W YAKIMA AVE	W YAKIMA CT	Local	Asphalt	29	153	25	518	71	75	80	Strng	V Good	0	29	**71.9**
30120	92ND AVE	W YAKIMA CT	W BARGE ST	Local	Asphalt	31	311	54	1125	67	79	60	Mod	V Good	5	28	**70.2**
28690	92ND AVE	W BARGE ST	SUMMITVIEW AVE	Local	Asphalt	30	673	112	2,356	62	57	80	Strng	Good	9	29	**59**
70700	92ND AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	29	736	119	2,490	58	54	80	Strng	Fair	13	29	**56**
70710	92ND AVE	W WALNUT ST	BELL AVE	Local	Asphalt	28	237	37	774	67	68	60	Mod	Good	9	25	**66**
31220	93RD AVE	SOUTH END	W BARGE ST	Local	Asphalt	35	503	98	2,066	72	64	60	Mod	Good	8	20	**69**
28720	93RD AVE	W BARGE ST	NORTH END	Local	Asphalt	35	485	93	1,954	70	70	80	Strng	Good	4	27	**69**
35060	93RD AVE	TORREY PINES LN	W WALNUT ST	Local	Asphalt	29	430	69	1455	66	54	80	Strng	Good	11	23	**61.2**
37280	93RD AVE	W WALNUT ST	SOUTH END	Local	Asphalt	32	506	90	1888	72	69	60	Mod	V Good	5	23	**70**
28140	94TH AVE	N 94TH PL	SUMMITVIEW AVE	Local	Asphalt	31	590	102	2,134	74	73	60	Mod	V Good	3	23	**73**
31610	94TH AVE	W YAKIMA AVE	W CHESTNUT AVE	Local	Asphalt	29	244	39	826	79	60	80	Strng	V Good	1	20	**72**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
33570	94TH AVE	W CHESTNUT AVE	TORREY PINES LN	Local	Asphalt	30	257	43	900	51	48	80	Strng	Marginal	10	39	**49**
35020	94TH AVE	TORREY PINES LN	W WALNUT ST	Local	Asphalt	31	430	74	1555	64	68	80	Strng	Good	6	31	**64.5**
36120	94TH AVE	W WALNUT ST	W WALNUT ST	Local	Asphalt	29	152	24	514	58	60	80	Strng	Fair	12	30	**58**
36580	94TH AVE	W WALNUT ST	SOUTH END	Local	Asphalt	50	129	36	749	62	54	80	Strng	Fair	9	30	**58.2**
30530	94TH PL	W YAKIMA AVE	N 94TH AVE	Local	Asphalt	31	489	84	1,769	66	65	60	Mod	Good	10	24	**65**
30520	95TH AVE	W YAKIMA AVE	NORTH END	Local	Asphalt	43	174	41	865	73	52	80	Strng	Good	4	23	**65**
24860	96TH AVE	SUMMITVIEW AVE	DS@677N SUMMITVIEW AVE	Local	Asphalt	21	677	79	1,659	96	87	60	Mod	Excellent	0	4	**92**
31710	96TH AVE	W CHESTNUT AVE	SUMMITVIEW AVE	Major Collector	Asphalt	36	1,319	264	5,540	65	70	60	Mod	Good	16	19	**66**
36180	96TH AVE	W CHESTNUT AVE	W WALNUT ST	Major Collector	Asphalt	34	837	158	3320	67	82	60	Mod	V Good	16	17	**71.1**
37750	96TH AVE	W WALNUT ST	TIETON DR	Major Collector	Asphalt	35	504	98	2058	63	68	60	Mod	Good	14	23	**63.5**
73170	96TH AVE	COOLIDGE RD	JONEGOLD CT	Truck Route	Asphalt	35	1067	207	4357	81	81	60	Mod	V Good	0	19	**80.1**
73160	96TH AVE	JONEGOLD CT	OCCIDENTAL RD	Truck Route	Asphalt	36	268	54	1126	79	67	80	Strng	V Good	0	21	**74.2**
9580	9TH AVE	WILLOW ST	GARRETT ST	Local	Asphalt	28	336	52	1098	65	37	80	Strng	Fair	16	19	**54.3**
8620	9TH AVE	GARRETT ST	FRUITVALE BLVD	Local	Asphalt	34	326	62	1293	75	54	80	Strng	Good	4	21	**67.1**
28320	9TH AVE	W YAKIMA AVE	SUMMITVIEW AVE	Local	Asphalt	35	446	87	1821	38	33	80	Strng	Poor	31	31	**35.7**
30510	9TH AVE	W YAKIMA AVE	W CHESTNUT AVE	Local	Asphalt	32	489	87	1826	95	84	60	Mod	Excellent	0	6	**90.1**
34980	9TH AVE	W WALNUT ST	W SPRUCE ST	Local	Concrete	31	481	83	1,740	42	38	60	Mod	Marginal	0	0	**40**
37010	9TH AVE	W SPRUCE ST	W PINE ST	Local	Concrete	30	481	80	1684	38	33	60	Mod	Poor	0	0	**35.1**
39390	9TH AVE	W PINE ST	TIETON DR	Local	Concrete	31	470	81	1,700	32	35	60	Mod	Poor	0	0	**33**
40850	9TH AVE	TIETON DR	PEACH ST	Local	Asphalt	27	466	70	1,468	74	52	80	Strng	Good	5	21	**66**
42080	9TH AVE	PEACH ST	MACLAREN ST	Local	Asphalt	28	246	38	804	76	56	80	Strng	Good	0	24	**69**
43300	9TH AVE	MACLAREN ST	SAINT HELENS ST	Local	Asphalt	28	278	43	908	76	56	80	Strng	Good	5	19	**69**
44900	9TH AVE	SAINT HELENS ST	DS@321S SAINT HELENS ST	Local	Composite	23	321	41	861	55	36	80	Strng	Marginal	0	45	**47**
46810	9TH AVE	DS@321S SAINT HELENS ST	STEWART ST	Local	Concrete	30	653	109	2,286	49	50	60	Mod	Marginal	0	0	**48**
47660	9TH AVE	STEWART ST	MULDER DR	Local	Concrete	30	434	72	1,519	38	44	60	Mod	Marginal	0	0	**40**
48850	9TH AVE	MULDER DR	W NOB HILL BLVD	Local	Concrete	30	229	38	802	45	42	60	Mod	Marginal	0	0	**44**
50350	9TH AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	31	659	113	2,383	73	51	60	Mod	Good	14	13	**64**
52590	9TH AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	30	665	111	2,328	56	44	80	Strng	Fair	23	21	**51**
54630	9TH AVE	W VIOLA AVE	W LOGAN AVE	Local	Asphalt	30	660	110	2,310	85	66	60	Mod	V Good	0	15	**78**
57760	9TH AVE	W MEAD AVE	DS@679S W MEAD AVE	Local	Asphalt	29	679	109	2,297	95	85	60	Mod	Excellent	5	0	**91**
58850	9TH AVE	DS@679S W MEAD AVE	W PIERCE ST	Local	Asphalt	31	649	112	2,347	95	85	60	Mod	Excellent	5	0	**91**
59950	9TH AVE	W PIERCE ST	SPOKANE ST	Local	Asphalt	29	638	103	2,159	100	90	60	Mod	Excellent	0	0	**96**
60340	9TH AVE	SPOKANE ST	FREMONT ST	Local	Asphalt	29	404	65	1367	79	60	60	Mod	V Good	8	13	**71.5**
10430	9TH ST	E D ST	NORTH END	Local	Asphalt	29	228	37	771	75	54	80	Strng	Good	0	25	**67.1**
12150	9TH ST	E LINCOLN AVE	E D ST	Local	Asphalt	36	479	96	2012	85	67	60	Mod	V Good	4	10	**78.3**
13450	9TH ST	E MARTIN LUTHER KING JR BLVD	E LINCOLN AVE	Truck Route	Asphalt	40	482	107	2249	25	49	60	Mod	Poor	44	31	**31.9**
17600	9TH ST	E YAKIMA AVE	STAFF SGT PENDLETON WAY	Truck Route	Asphalt	38	486	103	2155	63	44	80	Strng	Fair	15	22	**55.8**
15720	9TH ST	STAFF SGT PENDLETON WAY	DS@250N STAFF SGT PENDLETON WAY	Truck Route	Asphalt	40	250	56	1167	36	51	60	Mod	Marginal	38	26	**39.6**
14720	9TH ST	DS@250N STAFF SGT PENDLETON WAY	E MARTIN LUTHER KING JR BLVD	Truck Route	Asphalt	38	235	50	1,042	41	42	80	Strng	Marginal	29	30	**40**
26860	9TH ST	E SPRUCE ST	DS@710S E SPRUCE ST	Local	Asphalt	22	710	87	1,822	79	60	60	Mod	V Good	8	13	**72**
28240	9TH ST	DS@710S E SPRUCE ST	E MAPLE ST	Local	Asphalt	38	297	63	1317	81	62	80	Strng	V Good	0	19	**74.2**
30420	9TH ST	E MAPLE ST	E BEECH ST	Local	Asphalt	38	482	102	2137	85	66	60	Mod	V Good	0	15	**78**
33670	9TH ST	E BEECH ST	E RACE ST	Local	Asphalt	38	596	126	2,642	58	66	60	Mod	Good	22	20	**60**
39720	9TH ST	E ADAMS ST	PACIFIC AVE	Local	Asphalt	31	461	79	1,667	80	61	60	Mod	V Good	5	15	**72**
40080	9TH ST	PACIFIC AVE	DS@174S PACIFIC AVE	Local	Asphalt	28	174	27	568	79	59	60	Mod	V Good	6	15	**71.1**
40590	9TH ST	DS@174S PACIFIC AVE	RAINIER ST	Local	Asphalt	28	172	27	562	78	65	60	Mod	V Good	6	17	**72.7**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
41180	9TH ST	RAINIER ST	RAINIER ST	Local	Asphalt	29	145	23	491	82	63	60	Mod	V Good	7	12	**74**
42110	9TH ST	RAINIER ST	WALKER ST	Local	Asphalt	29	195	31	660	80	63	60	Mod	V Good	5	14	**73.5**
42470	9TH ST	WALKER ST	DS@163S WALKER ST	Local	Asphalt	29	163	26	551	73	55	80	Strng	Good	5	21	**66.4**
42980	9TH ST	DS@163S WALKER ST	LA SALLE ST	Local	Asphalt	28	98	15	320	77	57	80	Strng	V Good	3	20	**69.8**
43570	9TH ST	LA SALLE ST	LA SALLE ST	Local	Asphalt	28	72	11	235	88	73	60	Mod	V Good	4	8	**82.4**
45200	9TH ST	LA SALLE ST	E ARLINGTON ST	Local	Asphalt	30	311	52	1089	82	63	60	Mod	V Good	2	17	**74.4**
45930	9TH ST	E ARLINGTON ST	BAKER CT	Local	Asphalt	22	337	41	865	61	39	80	Strng	Fair	14	25	**52.6**
22470	A ST	N 2ND AVE	N 3RD AVE	Local	Asphalt	51	401	114	2386	40	38	80	Strng	Poor	33	21	**38.7**
22680	A ST	N 3RD AVE	DS@198W N 3RD AVE	Local	Asphalt	48	198	53	1109	70	51	80	Strng	Good	8	22	**62.2**
23000	A ST	DS@198W N 3RD AVE	N 4TH AVE	Local	Asphalt	50	200	56	1167	73	53	80	Strng	Good	6	21	**65.2**
23280	A ST	N 4TH AVE	DS@198W N 4TH AVE	Local	Asphalt	47	198	52	1,086	64	52	80	Strng	Good	8	28	**60**
23570	A ST	DS@198W N 4TH AVE	N 5TH AVE	Local	Asphalt	50	203	56	1184	40	45	80	Strng	Marginal	29	31	**40.8**
23750	A ST	N 5TH AVE	DS@201W N 5TH AVE	Local	Asphalt	47	201	52	1,102	54	48	80	Strng	Fair	11	35	**51**
23920	A ST	DS@201W N 5TH AVE	N 6TH AVE	Local	Asphalt	47	199	52	1,091	62	50	80	Strng	Fair	8	31	**57**
24100	A ST	N 6TH AVE	DS@204W N 6TH AVE	Local	Asphalt	49	204	56	1,166	52	43	80	Strng	Marginal	16	31	**48**
24410	A ST	DS@204W N 6TH AVE	N 7TH AVE	Local	Asphalt	50	180	50	1,050	49	42	80	Strng	Marginal	20	31	**46**
24620	A ST	N 7TH AVE	PIERCE AVE	Local	Asphalt	37	205	42	885	17	28	80	Strng	V Poor	52	31	**20**
26990	A ST	N 10TH AVE	DS@193W N 10TH AVE	Local	Asphalt	18	193	19	405	78	58	80	Strng	V Good	1	22	**70.4**
27330	A ST	DS@193W N 10TH AVE	N 11TH AVE	Local	Asphalt	18	184	18	386	73	52	80	Strng	Good	0	27	**65**
27360	A ST	N 11TH AVE	DS@200W N 11TH AVE	Local	Asphalt	21	200	23	490	54	38	80	Strng	Marginal	17	29	**48**
27400	A ST	DS@200W N 11TH AVE	HALL AVE	Local	Asphalt	20	114	13	266	42	31	80	Strng	Poor	33	25	**37**
27420	A ST	HALL AVE	DS@158W HALL AVE	Local	Asphalt	22	158	19	406	40	39	80	Strng	Poor	29	31	**39**
27370	A ST	DS@158W HALL AVE	CHICAGO AVE	Local	Asphalt	22	163	20	418	55	58	80	Strng	Fair	12	33	**55**
27380	A ST	CHICAGO AVE	DS@159W CHICAGO AVE	Local	Asphalt	20	159	18	371	61	64	80	Strng	Good	9	30	**61**
27390	A ST	DS@159W CHICAGO AVE	N 15TH AVE	Local	Asphalt	22	142	17	364	32	42	80	Strng	Poor	37	31	**35**
27440	A ST	N 15TH AVE	N 16TH AVE	Local	Asphalt	21	437	51	1,071	45	45	80	Strng	Marginal	21	33	**44**
76310	ACRE LN	S 62ND AVE	S 63RD LN	Other	Asphalt	28	274	43	895	88	69	60	Mod	V Good	8	4	**80.7**
76320	ACRE LN	S 63RD LN	S 64TH AVE	Other	Asphalt	28	174	27	568	83	64	60	Mod	V Good	6	11	**75.5**
37140	ADAMS ST	S FAIR AVE	S 12TH ST	Local	Asphalt	33	363	67	1398	63	36	80	Strng	Fair	20	17	**52.9**
37180	ADAMS ST	S 12TH ST	S 13TH ST	Local	Asphalt	30	320	53	1,120	71	48	80	Strng	Good	10	19	**63**
37200	ADAMS ST	S 13TH ST	S 14TH ST	Local	Asphalt	26	314	45	952	78	59	60	Mod	V Good	4	18	**71**
37230	ADAMS ST	S 14TH ST	S 15TH ST	Local	Asphalt	45	313	78	1643	86	67	60	Mod	V Good	3	11	**78.6**
37020	ADAMS ST	S 6TH ST	DS@188E S 6TH ST	Local	Asphalt	33	188	34	724	85	66	60	Mod	V Good	0	15	**77.8**
37040	ADAMS ST	DS@188E S 6TH ST	S 7TH ST	Local	Asphalt	32	191	34	713	78	60	60	Mod	V Good	9	13	**71**
37060	ADAMS ST	S 7TH ST	DS@188E S 7TH ST	Local	Asphalt	32	188	33	702	79	60	60	Mod	V Good	5	17	**72**
37100	ADAMS ST	DS@188E S 7TH ST	S 8TH ST	Local	Asphalt	32	191	34	713	81	62	60	Mod	V Good	11	8	**73.3**
37150	ADAMS ST	S 8TH ST	DS@190E S 8TH ST	Local	Asphalt	32	190	34	709	81	62	60	Mod	V Good	11	8	**74**
37160	ADAMS ST	DS@190E S 8TH ST	S 9TH ST	Local	Asphalt	32	186	33	694	76	60	80	Strng	V Good	4	20	**69.6**
37190	ADAMS ST	S 9TH ST	S FAIR AVE	Local	Asphalt	32	406	72	1516	81	62	60	Mod	V Good	4	14	**73.9**
36880	ADAMS ST	S 3RD ST	DS@190E S 3RD ST	Local	Asphalt	31	190	33	687	77	57	60	Mod	Good	6	18	**69**
36900	ADAMS ST	DS@190E S 3RD ST	S 4TH ST	Local	Asphalt	32	188	33	702	86	67	60	Mod	V Good	6	8	**79.1**
36930	ADAMS ST	S 4TH ST	DS@183E S 4TH ST	Local	Asphalt	32	183	33	683	85	67	60	Mod	V Good	1	14	**78.3**
36950	ADAMS ST	DS@183E S 4TH ST	S NACHES AVE	Local	Asphalt	32	190	34	709	88	69	60	Mod	V Good	0	12	**81**
36960	ADAMS ST	S NACHES AVE	DS@187E S NACHES AVE	Local	Asphalt	32	187	33	698	85	66	60	Mod	V Good	3	12	**77.5**
36990	ADAMS ST	DS@187E S NACHES AVE	S 6TH ST	Local	Asphalt	31	199	34	720	81	62	60	Mod	V Good	7	13	**74**
36860	ADAMS ST	E RACE ST	S 3RD ST	Local	Asphalt	32	401	71	1,497	78	59	60	Mod	V Good	7	14	**71**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
70750	AHTANUM RD	S 14TH AVE	S 16TH AVE	Minor Arterial	Asphalt	57	683	216	4,542	45	81	60	Mod	Fair	29	26	**56**
65350	AHTANUM RD	S 16TH AVE	DS@598W S 16TH AVE	Minor Arterial	Asphalt	54	598	179	3,767	32	73	60	Mod	Marginal	32	36	**44**
65430	AHTANUM RD	DS@598W S 16TH AVE	DS@1234W S 16TH AVE	Minor Arterial	Asphalt	53	636	187	3,933	34	73	60	Mod	Marginal	28	38	**46**
65460	AHTANUM RD	DS@1234W S 16TH AVE	S 21ST AVE	Minor Arterial	Asphalt	54	690	207	4,347	31	71	60	Mod	Marginal	35	31	**43**
65490	AHTANUM RD	S 21ST AVE	DS@281W S 21ST AVE	Minor Arterial	Asphalt	54	281	84	1,770	31	81	60	Mod	Marginal	31	38	**46**
65500	AHTANUM RD	DS@281W S 21ST AVE	S 23RD AVE	Minor Arterial	Asphalt	53	428	126	2646	32	73	60	Mod	Marginal	39	29	**44.1**
65540	AHTANUM RD	S 23RD AVE	DS@889W S 23RD AVE	Minor Arterial	Asphalt	60	889	296	6,223	29	77	60	Mod	Marginal	43	28	**43**
65560	AHTANUM RD	DS@889W S 23RD AVE	DS@1084W S 23RD AVE	Minor Arterial	Asphalt	58	195	63	1,320	36	74	80	Strng	Marginal	26	38	**47**
65570	AHTANUM RD	DS@1084W S 23RD AVE	S 26TH AVE	Minor Arterial	Asphalt	58	220	71	1,489	40	72	60	Mod	Fair	27	33	**49**
65590	AHTANUM RD	S 26TH AVE	DS@328W S 26TH AVE	Minor Arterial	Asphalt	60	328	109	2,296	40	64	60	Mod	Marginal	30	30	**46**
65550	AHTANUM RD	DS@328W S 26TH AVE	DS@716W S 26TH AVE	Minor Arterial	Asphalt	49	388	106	2218	43	72	60	Mod	Fair	28	29	**50.6**
64950	AHTANUM RD	DS@134W S 62ND AVE	S 64TH AVE	Minor Arterial	Asphalt	60	464	155	3248	83	76	60	Mod	V Good	4	13	**79.6**
61370	AIRFAIR WY	W WASHINGTON AVE	W WASHINGTON AVE	Local	Asphalt	28	1,073	167	3,505	44	43	80	Strng	Marginal	26	30	**43**
64290	AIRPORT LN	EAST END	DS@1831W EAST END	Local	Asphalt	32	1,831	326	6,836	84	81	60	Mod	V Good	8	8	**83**
64180	AIRPORT LN	DS@1831W EAST END	S 26TH AVE	Local	Asphalt	36	167	33	701	88	69	60	Mod	V Good	0	12	**81**
34830	ALDER ST	S FAIR AVE	S 12TH ST	Local	Asphalt	33	361	66	1390	78	58	60	Mod	V Good	9	14	**70.2**
34820	ALDER ST	S 12TH ST	DS@413E S 12TH ST	Local	Asphalt	31	413	71	1494	80	61	60	Mod	V Good	5	16	**72.7**
34790	ALDER ST	DS@413E S 12TH ST	DS@723E S 12TH ST	Local	Asphalt	32	310	55	1157	80	60	60	Mod	V Good	5	16	**72.3**
34850	ALDER ST	DS@723E S 12TH ST	DS@896E S 12TH ST	Local	Asphalt	30	173	29	606	79	59	60	Mod	V Good	4	17	**71**
16550	ALEXANDRIA CT	SW END	N 78TH AVE	Local	Asphalt	41	294	67	1,406	60	37	80	Strng	Fair	10	30	**51**
53960	ALLER ST	S 42ND AVE	S 43RD AVE	Local	Asphalt	31	329	57	1,190	64	51	80	Strng	Good	5	31	**59**
27220	ALPINE CT	N 88TH AVE	NW END	Local	Asphalt	37	415	85	1,789	73	52	60	Mod	Good	9	18	**65**
27690	ALPINE WAY	NE END	DS@302S NE END	Local	Asphalt	31	302	52	1085	74	53	60	Mod	Good	11	15	**65.9**
27770	ALPINE WAY	DS@302S NE END	N 74TH AVE	Local	Asphalt	25	159	22	464	83	64	60	Mod	V Good	8	10	**76**
27760	ALPINE WAY	N 74TH AVE	WEST END	Local	Asphalt	33	218	40	839	100	90	60	Mod	Excellent	0	0	**95.6**
71260	ALPINE WY	EAST END	N 45TH AVE	Local	Asphalt	37	236	48	1005	60	44	80	Strng	Fair	14	25	**53.8**
26890	ALPINE WY	N 65TH AVE	N 66TH AVE	Local	Asphalt	32	471	84	1758	71	50	80	Strng	Good	4	26	**62.7**
27310	ALPINE WY	N 66TH AVE	N 67TH AVE	Local	Asphalt	32	356	63	1329	66	45	80	Strng	Fair	13	21	**58.2**
27260	ALPINE WY	N 67TH AVE	N 68TH PL	Local	Asphalt	32	258	46	963	81	62	60	Mod	V Good	4	15	**74**
27230	ALPINE WY	N 68TH PL	N 69TH AVE	Local	Asphalt	31	315	54	1,139	75	56	80	Strng	Good	0	25	**68**
27270	ALPINE WY	N 69TH AVE	DS@245W N 69TH AVE	Local	Asphalt	32	245	44	915	70	51	80	Strng	Good	6	24	**63**
27970	ALPINE WY	DS@245W N 69TH AVE	N 71ST AVE	Local	Asphalt	31	616	106	2,228	65	60	80	Strng	Good	8	27	**63**
27940	ALPINE WY	N 71ST AVE	N 72ND AVE	Local	Asphalt	32	224	40	836	66	43	80	Strng	Fair	8	25	**58**
26850	ALPINE WY	EAST END	N 85TH AVE	Local	Asphalt	32	163	29	609	59	60	80	Strng	Fair	12	29	**59**
26830	ALPINE WY	N 85TH AVE	N 85TH AVE	Local	Asphalt	32	115	20	429	68	57	80	Strng	Good	4	28	**63.2**
71270	AMERICAN LN	N 80TH AVE	WEST END	Local	Asphalt	32	650	116	2,427	80	61	60	Mod	V Good	9	11	**73**
30590	APPLE BLOSSOM CT	EAST END	N 50TH AVE	Local	Asphalt	45	79	20	416	47	22	80	Strng	Poor	22	31	**37.2**
21990	APPLE VIEW WY	EAST END	N 66TH AVE	Local	Asphalt	36	626	125	2630	55	59	80	Strng	Fair	10	34	**55.8**
22100	APPLEVIEW RD	N 66TH AVE	N APPLEVIEW RD	Local	Asphalt	35	433	84	1,768	52	48	80	Strng	Fair	13	35	**49**
21440	APPLEVIEW RD	N APPLEVIEW RD	W LINCOLN AVE	Local	Asphalt	35	475	92	1940	48	53	80	Strng	Fair	18	33	**49.1**
21430	APPLEVIEW RD	S APPLEVIEW RD	NE END	Local	Asphalt	49	119	32	674	50	18	80	Strng	Poor	13	37	**38**
22150	APPLEVIEW RD	N APPLEVIEW RD	SW END	Local	Asphalt	41	201	45	955	57	35	80	Strng	Marginal	11	33	**48**
49360	ARBORETUM DR	W BIRCHFIELD RD	DS@881W W BIRCHFIELD RD	Local	Asphalt	34	881	166	3495	77	87	60	Mod	V Good	5	18	**79.8**
48600	ARBORETUM DR	DS@881W W BIRCHFIELD RD	NW END	Local	Asphalt	20	1005	112	2345	51	61	80	Strng	Fair	19	30	**53.5**
45440	ARLINGTON AVE	S 85TH AVE	S 88TH AVE	Local	Asphalt	28	1055	164	3446	71	77	60	Mod	V Good	4	26	**71.9**
45080	ARLINGTON ST	S 6TH ST	DS@167E S 6TH ST	Local	Asphalt	32	167	30	623	77	57	60	Mod	Good	10	13	**69**



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
45150	ARLINGTON ST	DS@167E S 6TH ST	S 7TH ST	Local	Asphalt	32	165	29	616	68	52	60	Mod	Good	16	15	**62**
45160	ARLINGTON ST	S 7TH ST	DS@167E S 7TH ST	Local	Asphalt	32	167	30	623	82	64	60	Mod	V Good	3	15	**75.2**
45180	ARLINGTON ST	DS@167E S 7TH ST	S 8TH ST	Local	Asphalt	32	165	29	616	76	66	60	Mod	V Good	14	10	**71.9**
45190	ARLINGTON ST	S 8TH ST	DS@165E S 8TH ST	Local	Asphalt	32	165	29	616	69	45	60	Mod	Good	14	17	**59.9**
45210	ARLINGTON ST	DS@165E S 8TH ST	S 9TH ST	Local	Asphalt	32	176	31	657	62	42	60	Mod	Fair	24	15	**53.8**
45230	ARLINGTON ST	S 9TH ST	S FAIR AVE	Local	Asphalt	32	497	88	1855	64	41	80	Strng	Fair	14	22	**55.2**
45090	ARLINGTON ST	S 1ST ST	DS@451E S 1ST ST	Local	Asphalt	41	451	103	2157	63	57	60	Mod	Good	17	20	**60.1**
45040	ARLINGTON ST	DS@451E S 1ST ST	DS@830E S 1ST ST	Local	Asphalt	40	379	84	1769	64	63	60	Mod	Good	12	24	**62.5**
45030	ARLINGTON ST	DS@830E S 1ST ST	S NACHES AVE	Local	Asphalt	40	54	12	252	77	57	60	Mod	V Good	7	16	**69.1**
45050	ARLINGTON ST	S NACHES AVE	DS@161E S NACHES AVE	Local	Asphalt	32	161	29	601	72	62	60	Mod	Good	7	21	**67.8**
45070	ARLINGTON ST	DS@161E S NACHES AVE	S 6TH ST	Local	Asphalt	32	166	30	620	60	43	80	Strng	Fair	16	24	**53**
45120	ARLINGTON ST	WEST END	S 1ST ST	Local	Asphalt	25	610	85	1779	27	27	80	Strng	Poor	32	41	**26.4**
44890	ARLINGTON ST	EAST END	DS@67W EAST END	Local	Asphalt	26	67	10	203	72	50	80	Strng	Good	7	21	**63.7**
44850	ARLINGTON ST	DS@67W EAST END	DS@162W EAST END	Local	Asphalt	26	95	14	288	87	68	60	Mod	V Good	2	11	**80**
44840	ARLINGTON ST	DS@162W EAST END	LANDON AVE	Local	Asphalt	26	56	8	170	29	31	80	Strng	Poor	41	30	**29**
44830	ARLINGTON ST	LANDON AVE	DS@164W LANDON AVE	Local	Asphalt	29	164	26	555	79	59	60	Mod	V Good	4	17	**71**
44790	ARLINGTON ST	DS@164W LANDON AVE	S 1ST AVE	Local	Asphalt	31	164	28	593	37	61	80	Strng	Marginal	25	38	**44.1**
44760	ARLINGTON ST	S 1ST AVE	S 1ST AVE	Local	Asphalt	30	59	10	207	34	56	80	Strng	Marginal	28	38	**40**
44780	ARLINGTON ST	S 1ST AVE	DS@133W S 1ST AVE	Local	Asphalt	37	133	27	574	44	50	80	Strng	Marginal	29	27	**45**
44710	ARLINGTON ST	DS@133W S 1ST AVE	S 2ND AVE	Local	Asphalt	38	140	30	621	68	46	80	Strng	Good	10	22	**60**
44730	ARLINGTON ST	S 2ND AVE	DS@163W S 2ND AVE	Local	Asphalt	38	163	34	723	68	70	80	Strng	Good	0	32	**68**
44740	ARLINGTON ST	DS@163W S 2ND AVE	S 3RD AVE	Local	Asphalt	38	167	35	740	74	53	80	Strng	Good	2	24	**66**
44580	ARLINGTON ST	S 10TH AVE	DS@153W S 10TH AVE	Local	Asphalt	16	153	14	286	85	67	60	Mod	V Good	8	6	**79**
44560	ARLINGTON ST	DS@153W S 10TH AVE	S 11TH AVE	Local	Asphalt	18	156	16	328	75	63	60	Mod	V Good	14	11	**70**
44550	ARLINGTON ST	S 11TH AVE	DS@151W S 11TH AVE	Local	Asphalt	17	151	14	299	75	54	60	Mod	Good	10	15	**67**
44590	ARLINGTON ST	DS@151W S 11TH AVE	PLEASANT AVE	Local	Asphalt	18	169	17	355	80	61	60	Mod	V Good	4	15	**73**
44610	ARLINGTON ST	PLEASANT AVE	DS@168W PLEASANT AVE	Local	Asphalt	20	168	19	392	77	58	80	Strng	V Good	0	23	**70**
44620	ARLINGTON ST	DS@168W PLEASANT AVE	QUEEN AVE	Local	Asphalt	16	164	15	306	74	53	80	Strng	Good	7	19	**66.4**
44650	ARLINGTON ST	QUEEN AVE	DS@166W QUEEN AVE	Local	Asphalt	22	166	20	426	55	31	80	Strng	Marginal	21	24	**46.4**
44660	ARLINGTON ST	DS@166W QUEEN AVE	S 12TH AVE	Local	Asphalt	21	162	19	397	77	58	60	Mod	V Good	7	16	**70**
45000	ARLINGTON ST	S 12TH AVE	DS@156W S 12TH AVE	Local	Asphalt	77	156	67	1,401	55	41	80	Strng	Fair	8	37	**49**
45010	ARLINGTON ST	DS@156W S 12TH AVE	S 13TH AVE	Local	Asphalt	78	163	71	1483	30	41	60	Mod	Poor	46	24	**32.5**
44990	ARLINGTON ST	S 13TH AVE	DS@166W S 13TH AVE	Local	Asphalt	73	166	67	1414	27	43	60	Mod	Poor	47	26	**31.1**
44970	ARLINGTON ST	DS@166W S 13TH AVE	S 14TH AVE	Local	Asphalt	67	161	60	1,258	28	51	60	Mod	Poor	44	29	**34**
44960	ARLINGTON ST	S 14TH AVE	DS@173W S 14TH AVE	Local	Asphalt	76	173	73	1,534	29	44	60	Mod	Poor	46	25	**33**
44940	ARLINGTON ST	DS@173W S 14TH AVE	S 15TH AVE	Local	Asphalt	76	162	68	1436	19	38	60	Mod	Poor	58	23	**24.3**
44930	ARLINGTON ST	S 15TH AVE	DS@164W S 15TH AVE	Local	Asphalt	77	164	70	1,473	28	47	60	Mod	Poor	44	28	**33**
44910	ARLINGTON ST	DS@164W S 15TH AVE	S 16TH AVE	Local	Asphalt	76	166	70	1,472	52	54	80	Strng	Fair	19	29	**52**
44880	ARLINGTON ST	S 16TH AVE	DS@169W S 16TH AVE	Local	Asphalt	12	169	11	237	56	17	80	Strng	Marginal	19	25	**42**
44860	ARLINGTON ST	DS@169W S 16TH AVE	S 17TH AVE	Local	Asphalt	13	167	12	253	47	29	80	Strng	Marginal	24	30	**40**
44820	ARLINGTON ST	S 17TH AVE	DS@160W S 17TH AVE	Local	Asphalt	13	160	12	243	25	21	80	Strng	V Poor	49	25	**23**
44800	ARLINGTON ST	DS@160W S 17TH AVE	S 18TH AVE	Local	Asphalt	13	167	12	253	49	27	80	Strng	Marginal	29	22	**41**
44700	ARLINGTON ST	S 18TH AVE	DS@167W S 18TH AVE	Local	Asphalt	12	167	11	234	36	29	80	Strng	Poor	38	26	**32.8**
44680	ARLINGTON ST	DS@167W S 18TH AVE	S 19TH AVE	Local	Asphalt	12	165	11	231	53	34	80	Strng	Marginal	21	25	**46**
44400	ARLINGTON ST	S 26TH AVE	S 27TH AVE	Local	Asphalt	29	328	53	1110	79	63	60	Mod	V Good	7	15	**72.5**
44370	ARLINGTON ST	S 27TH AVE	S 28TH AVE	Local	Asphalt	29	310	50	1049	79	59	80	Strng	V Good	1	21	**71.3**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
44350	ARLINGTON ST	S 28TH AVE	S 29TH AVE	Local	Asphalt	27	302	45	951	77	65	60	Mod	V Good	5	18	**72**
44200	ARLINGTON ST	S 29TH AVE	S 30TH AVE	Local	Asphalt	28	380	59	1,241	79	71	60	Mod	V Good	5	16	**75**
44140	ARLINGTON ST	S 30TH AVE	S 31ST AVE	Local	Asphalt	29	334	54	1,130	80	61	60	Mod	V Good	6	14	**73**
44100	ARLINGTON ST	S 31ST AVE	S 32ND AVE	Local	Asphalt	28	331	51	1,081	80	61	60	Mod	V Good	9	11	**73**
43610	ARLINGTON ST	S 36TH AVE	DS@320W S 36TH AVE	Local	Asphalt	28	320	50	1,045	52	45	80	Strng	Marginal	13	36	**48**
43620	ARLINGTON ST	DS@320W S 36TH AVE	S 38TH AVE	Local	Asphalt	27	335	50	1,055	46	39	80	Strng	Marginal	16	38	**43**
44310	ARLINGTON ST	S 40TH AVE	S 41ST AVE	Local	Asphalt	40	328	73	1,531	85	67	60	Mod	V Good	0	15	**78**
44320	ARLINGTON ST	S 41ST AVE	S 42ND AVE	Local	Asphalt	41	324	74	1,550	92	77	60	Mod	Excellent	0	8	**86**
44300	ARLINGTON ST	S 42ND AVE	DS@340W S 42ND AVE	Local	Asphalt	36	340	68	1,428	95	85	60	Mod	Excellent	0	5	**91**
44290	ARLINGTON ST	DS@340W S 42ND AVE	S 44TH AVE	Local	Asphalt	37	323	66	1,394	84	65	60	Mod	V Good	5	11	**77**
44280	ARLINGTON ST	S 44TH AVE	S 45TH AVE	Local	Asphalt	48	325	87	1,820	41	46	80	Strng	Marginal	28	32	**42**
44330	ARLINGTON ST	S 45TH AVE	WEST END	Local	Asphalt	25	286	40	834	28	43	80	Strng	Poor	31	41	**32**
44460	ARLINGTON ST	S 48TH AVE	S 49TH AVE	Local	Asphalt	20	284	32	663	94	81	60	Mod	Excellent	3	4	**89**
44430	ARLINGTON ST	S 49TH AVE	S 50TH AVE	Local	Asphalt	30	264	44	924	75	76	60	Mod	V Good	15	9	**75**
44420	ARLINGTON ST	S 50TH AVE	S 51ST AVE	Local	Asphalt	29	295	48	998	80	73	60	Mod	V Good	7	12	**77**
44380	ARLINGTON ST	S 51ST AVE	WEST END	Local	Asphalt	20	147	16	343	51	48	80	Strng	Marginal	25	24	**49**
44080	ARLINGTON ST	EAST END	S 53RD AVE	Local	Asphalt	28	185	29	604	75	55	80	Strng	Good	5	20	**68**
44060	ARLINGTON ST	S 53RD AVE	S 53RD AVE	Local	Asphalt	29	146	24	494	83	73	60	Mod	V Good	0	17	**79**
44040	ARLINGTON ST	S 53RD AVE	DS@519W S 53RD AVE	Local	Asphalt	21	519	61	1272	86	77	60	Mod	V Good	3	10	**82.7**
44030	ARLINGTON ST	DS@519W S 53RD AVE	S 56TH AVE	Local	Asphalt	20	502	56	1,171	80	63	60	Mod	V Good	8	12	**74**
44020	ARLINGTON ST	S 56TH AVE	DS@285W S 56TH AVE	Local	Asphalt	19	285	30	632	81	66	60	Mod	V Good	11	9	**75**
44000	ARLINGTON ST	DS@285W S 56TH AVE	DS@545W S 56TH AVE	Local	Asphalt	22	260	32	667	88	77	60	Mod	V Good	0	13	**83**
43990	ARLINGTON ST	DS@545W S 56TH AVE	S 58TH AVE	Local	Asphalt	18	285	29	599	87	73	60	Mod	V Good	9	5	**82**
43980	ARLINGTON ST	S 58TH AVE	S 59TH AVE	Local	Asphalt	16	344	31	642	85	70	60	Mod	V Good	7	8	**79**
43960	ARLINGTON ST	S 59TH AVE	S 60TH AVE	Local	Asphalt	18	327	33	687	81	77	60	Mod	V Good	6	13	**79**
43940	ARLINGTON ST	S 60TH AVE	WEST END	Local	Asphalt	18	148	15	311	72	54	80	Strng	Good	8	21	**65**
34680	ARTHUR BLVD	W CHESTNUT AVE	LABAN AVE	Local	Asphalt	28	420	65	1372	77	57	60	Mod	V Good	7	16	**69.4**
22920	AVALANCHE AVE	N 40TH AVE	N 41ST AVE	Local	Asphalt	33	328	60	1,263	68	42	80	Strng	Fair	7	26	**58**
22930	AVALANCHE AVE	N 41ST AVE	N 42ND AVE	Local	Asphalt	31	329	57	1,190	70	48	60	Mod	Good	15	15	**62**
22970	AVALANCHE AVE	N 42ND AVE	DS@307W N 42ND AVE	Local	Asphalt	32	307	55	1,146	67	42	60	Mod	Fair	18	14	**58**
22980	AVALANCHE AVE	DS@307W N 42ND AVE	N 44TH AVE	Local	Asphalt	31	335	58	1,212	59	36	60	Mod	Fair	24	17	**50**
22950	AVALANCHE AVE	N 44TH AVE	DS@328W N 44TH AVE	Local	Asphalt	32	328	58	1,225	71	48	80	Strng	Good	11	18	**63**
22960	AVALANCHE AVE	DS@328W N 44TH AVE	N 46TH AVE	Local	Asphalt	32	441	78	1646	77	58	60	Mod	V Good	6	17	**69.8**
22410	AVALANCHE AVE	N 46TH AVE	DS@272W N 46TH AVE	Local	Asphalt	32	272	48	1015	68	44	60	Mod	Good	16	16	**59.1**
22020	AVALANCHE AVE	DS@272W N 46TH AVE	DS@599W N 46TH AVE	Local	Asphalt	32	326	58	1217	66	48	60	Mod	Good	15	19	**58.8**
22180	AVALANCHE AVE	DS@599W N 46TH AVE	SNOWMOUNTAIN RD	Local	Asphalt	32	584	104	2,180	58	43	80	Strng	Fair	19	23	**52**
22080	AVALANCHE AVE	EAST END	N 70TH AVE	Local	Asphalt	32	130	23	485	57	21	80	Strng	Marginal	17	26	**44**
22030	AVALANCHE AVE	N 70TH AVE	WEST END	Local	Asphalt	22	264	32	678	54	31	80	Strng	Marginal	20	25	**46**
21790	AVALANCHE CT	N 73RD AVE	WEST END	Local	Asphalt	42	185	44	915	51	39	80	Strng	Marginal	16	33	**46.1**
45970	BAKER CT	S 9TH ST	EAST END	Local	Asphalt	46	159	41	862	71	49	80	Strng	Good	3	25	**63**
45410	BAKER ST	S 3RD AVE	DS@160W S 3RD AVE	Local	Asphalt	24	160	21	448	68	44	60	Mod	Good	20	12	**59**
45390	BAKER ST	DS@160W S 3RD AVE	S 4TH AVE	Local	Asphalt	23	164	21	440	89	70	60	Mod	V Good	0	11	**82**
45380	BAKER ST	S 4TH AVE	DS@166W S 4TH AVE	Local	Asphalt	24	166	22	465	82	63	60	Mod	V Good	6	12	**74**
45340	BAKER ST	DS@166W S 4TH AVE	S 5TH AVE	Local	Asphalt	24	165	22	462	83	64	60	Mod	V Good	0	17	**76**
45360	BAKER ST	S 5TH AVE	DS@166W S 5TH AVE	Local	Asphalt	23	166	21	445	69	44	60	Mod	Good	15	17	**59**
45300	BAKER ST	DS@166W S 5TH AVE	S 6TH AVE	Local	Asphalt	23	165	21	443	70	46	60	Mod	Good	20	11	**61**



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
45310	BAKER ST	S 6TH AVE	DS@165W S 6TH AVE	Local	Asphalt	24	165	22	462	85	66	60	Mod	V Good	0	15	**78**
45320	BAKER ST	DS@165W S 6TH AVE	CORNELL AVE	Local	Asphalt	23	155	20	416	77	57	60	Mod	V Good	6	17	**69**
45720	BAKER ST	CORNELL AVE	WEST END	Local	Asphalt	31	334	58	1,208	64	51	80	Strng	Fair	6	29	**59**
45530	BAKER ST	S 10TH AVE	DS@155W S 10TH AVE	Local	Asphalt	24	155	21	434	67	49	60	Mod	Good	22	11	**60**
45540	BAKER ST	DS@155W S 10TH AVE	S 11TH AVE	Local	Asphalt	24	156	21	437	79	70	60	Mod	V Good	8	13	**75**
45560	BAKER ST	S 11TH AVE	DS@151W S 11TH AVE	Local	Asphalt	23	151	19	405	66	39	60	Mod	Fair	19	15	**56**
45570	BAKER ST	DS@151W S 11TH AVE	PLEASANT AVE	Local	Asphalt	25	168	23	490	79	64	60	Mod	V Good	8	13	**72.7**
45590	BAKER ST	PLEASANT AVE	DS@170W PLEASANT AVE	Local	Asphalt	20	170	19	397	80	60	60	Mod	V Good	7	13	**72.3**
45630	BAKER ST	DS@170W PLEASANT AVE	QUEEN AVE	Local	Asphalt	20	165	18	385	65	48	60	Mod	Fair	17	18	**58**
45650	BAKER ST	QUEEN AVE	DS@168W QUEEN AVE	Local	Asphalt	19	168	18	372	89	69	60	Mod	V Good	0	11	**82**
45690	BAKER ST	DS@168W QUEEN AVE	S 12TH AVE	Local	Asphalt	19	189	20	419	77	57	60	Mod	V Good	9	14	**69.6**
29830	BARGE ST	GILBERT DR	N 22ND AVE	Local	Asphalt	32	518	92	1,934	40	32	80	Strng	Poor	36	25	**36**
29640	BARGE ST	N 22ND AVE	N 23RD AVE	Local	Asphalt	24	333	44	932	81	62	60	Mod	V Good	6	13	**73.3**
29590	BARGE ST	N 23RD AVE	N 24TH AVE	Local	Asphalt	25	332	46	968	65	59	80	Strng	Good	12	23	**62**
29560	BARGE ST	N 24TH AVE	DS@164W N 24TH AVE	Local	Asphalt	23	164	21	440	41	48	80	Strng	Marginal	28	31	**42.3**
29540	BARGE ST	DS@164W N 24TH AVE	N 25TH AVE	Local	Asphalt	24	166	22	465	52	44	80	Strng	Marginal	22	27	**48**
29530	BARGE ST	N 25TH AVE	DS@164W N 25TH AVE	Local	Asphalt	24	164	22	459	37	31	80	Strng	Poor	33	31	**34**
29490	BARGE ST	DS@164W N 25TH AVE	N 26TH AVE	Local	Asphalt	24	164	22	459	53	38	80	Strng	Marginal	19	28	**47**
29480	BARGE ST	N 26TH AVE	N 27TH AVE	Local	Asphalt	24	325	43	910	36	48	80	Strng	Marginal	34	30	**39**
29420	BARGE ST	N 27TH AVE	DS@164W N 27TH AVE	Local	Asphalt	24	164	22	459	64	69	60	Mod	Good	11	25	**64.5**
29390	BARGE ST	DS@164W N 27TH AVE	N 28TH AVE	Local	Asphalt	24	157	21	440	81	63	60	Mod	V Good	0	19	**74**
29360	BARGE ST	N 28TH AVE	DS@332W N 28TH AVE	Local	Asphalt	23	332	42	891	47	55	60	Mod	Marginal	26	27	**48**
29310	BARGE ST	DS@332W N 28TH AVE	N 30TH AVE	Local	Asphalt	23	342	44	918	44	48	80	Strng	Marginal	28	28	**44.1**
29290	BARGE ST	N 30TH AVE	N 31ST AVE	Local	Asphalt	24	336	45	941	45	51	80	Strng	Marginal	23	32	**46**
29250	BARGE ST	N 31ST AVE	N 32ND AVE	Local	Asphalt	24	324	43	907	44	37	80	Strng	Marginal	28	29	**41**
29230	BARGE ST	N 32ND AVE	DS@404W N 32ND AVE	Local	Asphalt	23	404	52	1,084	82	64	60	Mod	V Good	5	13	**75**
29260	BARGE ST	DS@404W N 32ND AVE	N 34TH AVE	Local	Asphalt	23	254	32	682	77	58	80	Strng	V Good	3	20	**69.8**
29320	BARGE ST	N 34TH AVE	N 36TH AVE	Local	Asphalt	24	661	88	1851	70	47	60	Mod	Good	13	16	**61.7**
30150	BARGE ST	N 42ND AVE	DS@500W N 42ND AVE	Local	Asphalt	32	500	89	1,867	40	44	80	Strng	Marginal	29	31	**41**
29400	BARGE ST	DS@500W N 42ND AVE	WEST END	Local	Asphalt	50	58	16	335	60	27	80	Strng	Marginal	15	25	**48**
29380	BARGE ST	N 48TH AVE	N 49TH AVE	Local	Asphalt	35	320	62	1,307	91	73	60	Mod	V Good	1	8	**84**
29070	BARGE ST	N 58TH AVE	N 59TH AVE	Local	Asphalt	31	315	54	1139	80	67	60	Mod	V Good	1	19	**75.2**
29020	BARGE ST	N 59TH AVE	N 60TH AVE	Local	Asphalt	31	334	58	1,208	76	55	80	Strng	Good	4	21	**68**
70140	BARGE ST	N 60TH AVE	SOUTH END	Local	Asphalt	25	634	88	1,842	100	90	60	Mod	Excellent	0	0	**96**
30010	BARGE ST	N 65TH AVE	WEST END	Local	Asphalt	40	291	64	1,353	65	38	80	Strng	Fair	12	22	**55**
29800	BARGE ST	N 44TH AVE	N 45TH AVE	Local	Asphalt	14	307	24	501	71	49	80	Strng	Good	10	18	**63**
28630	BARGE ST	S 76TH AVE	N 77TH AVE	Local	Asphalt	27	493	74	1,553	63	49	80	Strng	Fair	3	34	**57**
28540	BARGE ST	N 77TH AVE	WEST END	Local	Asphalt	28	152	24	497	64	35	80	Strng	Fair	7	29	**53**
28570	BARGE ST	EAST END	N 85TH AVE	Local	Asphalt	27	159	24	501	75	55	80	Strng	Good	6	18	**68**
28590	BARGE ST	N 85TH AVE	N 86TH AVE	Local	Asphalt	29	309	50	1,045	66	50	80	Strng	Good	5	29	**60**
28560	BARGE ST	N 86TH AVE	N 87TH AVE	Local	Asphalt	28	235	37	768	76	71	80	Strng	V Good	0	24	**74**
28390	BARGE ST	N 87TH AVE	WEST END	Local	Asphalt	29	112	18	379	68	77	80	Strng	V Good	0	32	**71**
28740	BARGE ST	N 88TH AVE	DS@390W N 88TH AVE	Local	Asphalt	29	390	63	1,320	81	79	60	Mod	V Good	0	19	**80**
28750	BARGE ST	DS@390W N 88TH AVE	N 90TH AVE	Local	Asphalt	28	433	67	1,414	80	61	60	Mod	V Good	4	16	**73**
28640	BARGE ST	N 90TH AVE	N 91ST AVE	Local	Asphalt	28	300	47	980	55	60	80	Strng	Fair	13	32	**56**
28680	BARGE ST	N 91ST AVE	N 92ND AVE	Local	Asphalt	29	393	63	1,330	64	58	80	Strng	Good	8	28	**61**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name

GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary							
										Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
28710	BARGE ST	N 92ND AVE	N 93RD AVE	Local	Asphalt	30	308	51	1,078	61	47	80	Strng	Fair	10	29	**56**
28730	BARGE ST	N 93RD AVE	WEST END	Local	Asphalt	27	166	25	523	61	61	80	Strng	Good	8	31	**60**
4490	BARTLETT PL	N 1ST ST	DS@153E N 1ST ST	Local	Asphalt	40	153	34	714	65	38	60	Mod	Fair	32	3	**55**
4510	BARTLETT PL	DS@153E N 1ST ST	N 2ND ST	Local	Asphalt	44	171	42	878	33	37	80	Strng	Poor	31	20	**33**
4550	BARTLETT PL	WEST END	N FRONT ST	Local	Asphalt	31	282	49	1,020	82	82	60	Mod	V Good	0	3	**81**
4480	BARTLETT PL	N FRONT ST	N 1ST ST	Local	Asphalt	34	350	66	1,388	92	77	60	Mod	Excellent	4	4	**86**
29760	BEECH ST	S FAIR AVE	DS@183E S FAIR AVE	Local	Asphalt	34	183	35	726	65	53	60	Mod	Good	22	13	**60**
29790	BEECH ST	DS@183E S FAIR AVE	S 12TH ST	Local	Asphalt	34	182	34	722	69	87	60	Mod	V Good	7	24	**74**
29770	BEECH ST	S 12TH ST	DS@179E S 12TH ST	Local	Asphalt	36	179	36	752	79	79	60	Mod	V Good	0	21	**78.3**
29750	BEECH ST	DS@179E S 12TH ST	S 13TH ST	Local	Asphalt	36	178	36	748	66	68	60	Mod	Good	22	12	**65.7**
29730	BEECH ST	S 13TH ST	DS@181E S 13TH ST	Local	Asphalt	37	181	37	781	77	90	60	Mod	V Good	0	23	**81**
29700	BEECH ST	DS@181E S 13TH ST	S 15TH ST	Local	Asphalt	37	415	85	1,791	29	55	60	Mod	Poor	41	30	**37**
29680	BEECH ST	S 15TH ST	DS@305E S 15TH ST	Local	Asphalt	34	305	58	1,210	63	67	60	Mod	Good	15	22	**64**
70030	BEECH ST	DS@305E S 15TH ST	CHALMERS ST	Local	Asphalt	32	714	127	2,666	77	66	60	Mod	V Good	14	9	**72**
30410	BEECH ST	S 9TH ST	DS@200E S 9TH ST	Local	Asphalt	32	200	36	747	93	80	60	Mod	Excellent	0	7	**88**
30130	BEECH ST	DS@200E S 9TH ST	S 10TH ST	Local	Asphalt	31	203	35	734	99	90	60	Mod	Excellent	0	1	**95**
29950	BEECH ST	S 10TH ST	S FAIR AVE	Local	Asphalt	31	158	27	571	83	65	60	Mod	V Good	4	13	**76**
32330	BEECH ST	S 6TH ST	DS@200E S 6TH ST	Local	Asphalt	31	200	34	723	91	74	60	Mod	Excellent	0	9	**85**
32100	BEECH ST	DS@200E S 6TH ST	S 7TH ST	Local	Asphalt	31	187	32	676	71	48	60	Mod	Good	16	13	**63**
34280	BEECH ST	S 3RD ST	DS@204E S 3RD ST	Local	Asphalt	40	204	45	952	73	52	60	Mod	Good	9	17	**65**
34090	BEECH ST	DS@204E S 3RD ST	S 4TH ST	Local	Asphalt	39	197	43	896	73	58	80	Strng	Good	5	23	**67**
33960	BEECH ST	S 4TH ST	DS@200E S 4TH ST	Local	Asphalt	31	200	34	723	81	62	60	Mod	V Good	1	18	**74**
33880	BEECH ST	DS@200E S 4TH ST	S NACHES AVE	Local	Asphalt	31	222	38	803	82	63	60	Mod	V Good	3	15	**75**
33520	BEECH ST	S NACHES AVE	DS@222E S NACHES AVE	Local	Asphalt	32	222	39	829	85	66	60	Mod	V Good	6	9	**78**
32850	BEECH ST	DS@222E S NACHES AVE	S 6TH ST	Local	Asphalt	31	198	34	716	82	63	60	Mod	V Good	5	13	**75**
35300	BEECH ST	S 1ST ST	DS@204E S 1ST ST	Local	Asphalt	39	204	44	928	79	60	80	Strng	V Good	0	21	**72**
34990	BEECH ST	DS@204E S 1ST ST	S 2ND ST	Local	Asphalt	39	198	43	901	83	65	60	Mod	V Good	0	17	**76**
34800	BEECH ST	S 2ND ST	DS@199E S 2ND ST	Local	Asphalt	40	199	44	929	84	65	60	Mod	V Good	1	15	**77**
34560	BEECH ST	DS@199E S 2ND ST	S 3RD ST	Local	Asphalt	40	197	44	919	87	68	60	Mod	V Good	0	13	**80**
36310	BEECH ST	S FRONT ST	DS@182E S FRONT ST	Local	Asphalt	40	182	40	849	70	46	80	Strng	Good	9	22	**61**
35660	BEECH ST	DS@182E S FRONT ST	S 1ST ST	Local	Asphalt	40	207	46	966	77	57	80	Strng	V Good	0	23	**69**
36160	BEL AIR DR	W CHESTNUT AVE	SOUTH END	Local	Asphalt	35	689	136	2,848	91	74	60	Mod	Excellent	0	9	**85**
31310	BELGOLD DR	N 39TH AVE	N 39TH AVE	Local	Asphalt	31	658	113	2,380	64	40	80	Strng	Fair	17	19	**55**
36470	BELL AVE	S 14TH AVE	DS@164W S 14TH AVE	Local	Concrete	23	164	21	440	36	23	60	Mod	Poor	0	0	**31**
36430	BELL AVE	DS@164W S 14TH AVE	S 15TH AVE	Local	Concrete	24	167	22	468	38	49	60	Mod	Marginal	0	0	**41.1**
36450	BELL AVE	S 15TH AVE	DS@163W S 15TH AVE	Local	Concrete	23	163	21	437	82	64	60	Mod	V Good	0	0	**75.5**
36420	BELL AVE	DS@163W S 15TH AVE	S 16TH AVE	Local	Concrete	24	165	22	462	55	38	60	Mod	Marginal	0	0	**48**
36410	BELL AVE	S 16TH AVE	DS@170W S 16TH AVE	Local	Concrete	24	170	23	476	57	26	60	Mod	Marginal	0	0	**46.1**
36390	BELL AVE	DS@170W S 16TH AVE	S 17TH AVE	Local	Concrete	23	163	21	437	56	44	60	Mod	Fair	0	0	**50.9**
36370	BELL AVE	S 17TH AVE	DS@163W S 17TH AVE	Local	Concrete	24	163	22	456	41	30	60	Mod	Poor	0	0	**37**
36380	BELL AVE	DS@163W S 17TH AVE	S 18TH AVE	Local	Concrete	24	164	22	459	42	49	60	Mod	Marginal	0	0	**44**
36300	BELL AVE	S 18TH AVE	DS@164W S 18TH AVE	Local	Asphalt	24	164	22	459	60	38	80	Strng	Fair	13	27	**52**
36280	BELL AVE	DS@164W S 18TH AVE	S 19TH AVE	Local	Asphalt	23	172	22	462	40	44	80	Strng	Marginal	26	34	**41**
36920	BELL AVE	S 40TH AVE	WEST END	Local	Asphalt	38	278	59	1,234	27	34	80	Strng	Poor	35	38	**28**
37070	BELL AVE	CHISHOLM TL	DS@245W CHISHOLM TL	Local	Asphalt	32	245	44	915	50	40	80	Strng	Marginal	22	28	**45**
37080	BELL AVE	DS@245W CHISHOLM TL	S 44TH AVE	Local	Asphalt	32	258	46	963	57	49	80	Strng	Fair	10	33	**54**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
70720	BELL AVE	S 92ND AVE	WEST END	Local	Asphalt	46	258	66	1378	70	65	80	Strng	Good	1	30	**67.3**
13980	BELLEVUE PL	ENGLEWOOD AVE	NORTH END	Local	Asphalt	36	259	52	1,085	74	53	80	Strng	Good	3	22	**67**
28980	BELMONT AVE	N 15TH AVE	N 16TH AVE	Local	Concrete	20	443	49	1,034	33	42	60	Mod	Poor	0	0	**35**
15770	BENJAMIN DR	N 44TH AVE	WEST END	Local	Asphalt	36	277	55	1155	52	30	80	Strng	Marginal	26	22	**43.5**
51700	BIRCH ST	S 18TH ST	EAST END	Local	Asphalt	32	701	125	2,617	82	64	60	Mod	V Good	9	9	**75**
72060	BIRCHFIELD RD	SR24	ARBORETUM DR	Local	Asphalt	40	99	22	462	75	55	80	Strng	Good	5	20	**67.8**
49500	BIRCHFIELD RD	ARBORETUM DR	DS@261E ARBORETUM DR	Local	Asphalt	29	261	42	883	91	78	60	Mod	Excellent	0	9	**86**
49590	BIRCHFIELD RD	DS@261E ARBORETUM DR	DS@873E ARBORETUM DR	Local	Asphalt	26	612	88	1,856	49	48	80	Strng	Marginal	18	33	**47**
49580	BIRCHFIELD RD	DS@873E ARBORETUM DR	EAST END	Local	Asphalt	16	327	29	610	63	38	80	Strng	Fair	10	27	**54**
21270	BITTERROOT LN	N 57TH AVE	N 58TH AVE	Local	Asphalt	40	424	94	1,979	82	64	60	Mod	V Good	11	7	**75**
21220	BITTERROOT WY	W LINCOLN AVE	DS@247S W LINCOLN AVE	Local	Asphalt	25	247	34	720	68	43	80	Strng	Fair	12	20	**59**
21930	BITTERROOT WY	DS@247S W LINCOLN AVE	DS@512W W LINCOLN AVE	Local	Asphalt	24	265	35	742	52	43	80	Strng	Marginal	21	27	**48**
21940	BITTERROOT WY	DS@512W W LINCOLN AVE	DS@761W W LINCOLN AVE	Local	Asphalt	23	249	32	668	70	46	80	Strng	Good	11	19	**61**
21950	BITTERROOT WY	DS@761W W LINCOLN AVE	DS@1131W W LINCOLN AVE	Local	Asphalt	20	370	41	863	64	36	80	Strng	Fair	13	24	**54**
21610	BITTERROOT WY	DS@1131W W LINCOLN AVE	DS@1300W W LINCOLN AVE	Local	Asphalt	22	169	21	434	67	41	80	Strng	Fair	9	24	**57**
22000	BITTERROOT WY	DS@1300W W LINCOLN AVE	BITTERROOT WY	Local	Asphalt	20	262	29	611	43	38	80	Strng	Marginal	28	28	**41**
47410	BLACKBURN ST	S 8TH AVE	WEST END	Local	Asphalt	44	169	41	868	89	70	60	Mod	V Good	0	11	**82**
69940	BLUE HILLS PL	SE END	ENGLEWOOD CREST DR	Local	Asphalt	26	234	34	710	69	46	60	Mod	Good	14	17	**60**
49920	BOGGESS LN	S 18TH ST	DS@365E S 18TH ST	Local	Asphalt	34	365	69	1,448	81	62	60	Mod	V Good	5	14	**74**
49930	BOGGESS LN	DS@365E S 18TH ST	EAST END	Local	Asphalt	28	343	53	1,120	88	69	60	Mod	V Good	4	8	**81**
46830	BONNIE DOONE AVE	S 16TH AVE	DS@163W S 16TH AVE	Local	Concrete	35	163	32	666	44	36	60	Mod	Marginal	0	0	**41**
46730	BONNIE DOONE AVE	DS@163W S 16TH AVE	S 17TH AVE	Local	Concrete	23	173	22	464	36	49	60	Mod	Marginal	0	0	**40**
75380	BONNIE DOONE AVE	S 17TH AVE	S 17TH AVE	Local	Concrete	23	41	5	110	54	26	60	Mod	Marginal	0	0	**44**
46620	BONNIE DOONE AVE	S 17TH AVE	DS@120W S 17TH AVE	Local	Concrete	24	120	16	336	41	34	60	Mod	Poor	0	0	**37.8**
46500	BONNIE DOONE AVE	DS@120W S 17TH AVE	S 18TH AVE	Local	Concrete	23	85	11	228	43	38	60	Mod	Marginal	0	0	**41**
46490	BONNIE DOONE AVE	S 18TH AVE	S 18TH AVE	Local	Concrete	23	81	10	217	36	41	60	Mod	Poor	0	0	**37**
46480	BONNIE DOONE AVE	S 18TH AVE	DS@123W S 18TH AVE	Local	Concrete	23	123	16	330	37	50	60	Mod	Marginal	0	0	**41**
46450	BONNIE DOONE AVE	DS@123W S 18TH AVE	DS@168W S 18TH AVE	Local	Concrete	23	45	6	121	46	59	60	Mod	Fair	0	0	**50**
46460	BONNIE DOONE AVE	DS@168W S 18TH AVE	S 19TH AVE	Local	Concrete	23	145	19	389	30	44	60	Mod	Poor	0	0	**34**
46440	BONNIE DOONE AVE	S 19TH AVE	DS@162W S 19TH AVE	Local	Concrete	23	162	21	435	39	37	60	Mod	Poor	0	0	**37.5**
46410	BONNIE DOONE AVE	DS@162W S 19TH AVE	S 20TH AVE	Local	Concrete	24	168	22	470	45	51	60	Mod	Marginal	0	0	**46**
46400	BONNIE DOONE AVE	S 20TH AVE	DS@165W S 20TH AVE	Local	Asphalt	24	165	22	462	64	52	80	Strng	Fair	13	23	**59**
46380	BONNIE DOONE AVE	DS@165W S 20TH AVE	S 21ST AVE	Local	Asphalt	23	164	21	440	39	57	60	Mod	Marginal	31	30	**44**
46370	BONNIE DOONE AVE	S 21ST AVE	DS@163W S 21ST AVE	Local	Asphalt	25	163	23	475	51	42	80	Strng	Marginal	25	24	**47**
46350	BONNIE DOONE AVE	DS@163W S 21ST AVE	S 22ND AVE	Local	Asphalt	24	166	22	465	75	65	60	Mod	V Good	6	19	**70**
46340	BONNIE DOONE AVE	S 22ND AVE	S 23RD AVE	Local	Asphalt	25	335	47	977	57	53	80	Strng	Fair	19	24	**55**
46320	BONNIE DOONE AVE	S 23RD AVE	S 24TH AVE	Local	Asphalt	24	330	44	924	44	41	60	Mod	Marginal	34	22	**42**
46290	BONNIE DOONE AVE	S 24TH AVE	DS@169W S 24TH AVE	Local	Asphalt	24	169	23	473	57	28	80	Strng	Marginal	23	20	**46**
46270	BONNIE DOONE AVE	DS@169W S 24TH AVE	S 25TH AVE	Local	Asphalt	24	164	22	459	90	70	60	Mod	V Good	0	10	**82.5**
46240	BONNIE DOONE AVE	S 25TH AVE	S 26TH AVE	Local	Asphalt	25	330	46	963	73	52	80	Strng	Good	9	18	**65**
46220	BONNIE DOONE AVE	S 26TH AVE	S 27TH AVE	Local	Asphalt	31	330	57	1,194	66	45	60	Mod	Fair	17	16	**58**
46190	BONNIE DOONE AVE	S 27TH AVE	S 28TH AVE	Local	Asphalt	32	302	54	1,127	37	43	80	Strng	Poor	32	31	**38**
46170	BONNIE DOONE AVE	S 28TH AVE	S 29TH AVE	Local	Asphalt	32	306	54	1,142	68	52	60	Mod	Good	14	18	**61**
46110	BONNIE DOONE AVE	S 29TH AVE	HAGAR AVE	Local	Asphalt	32	232	41	866	33	36	60	Mod	Poor	43	24	**33**
46130	BONNIE DOONE AVE	HAGAR AVE	S 30TH AVE	Local	Asphalt	32	156	28	582	42	19	80	Strng	Poor	39	19	**33**
46150	BONNIE DOONE AVE	S 30TH AVE	S 31ST AVE	Local	Asphalt	32	330	59	1,232	62	52	60	Mod	Fair	19	19	**58**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
46090	BONNIE DOONE AVE	S 31ST AVE	S 32ND AVE	Local	Asphalt	32	332	59	1,239	83	64	60	Mod	V Good	10	8	**76**
45820	BONNIE DOONE AVE	EAST END	S 37TH AVE	Local	Asphalt	37	312	64	1,335	59	31	80	Strng	Marginal	12	28	**49**
45840	BONNIE DOONE AVE	S 37TH AVE	DS@108W S 37TH AVE	Local	Asphalt	32	108	19	403	68	52	80	Strng	Good	2	30	**62**
45800	BONNIE DOONE AVE	DS@108W S 37TH AVE	S 38TH AVE	Local	Asphalt	32	152	27	567	53	40	80	Strng	Marginal	17	29	**48**
52000	BORLEY WY	EAST END	S 72ND AVE	Local	Asphalt	20	809	90	1,888	24	65	80	Strng	Poor	30	34	**36**
41220	BRACKETT AVE	S 27TH AVE	DS@374W S 27TH AVE	Local	Asphalt	32	374	66	1,396	72	52	80	Strng	Good	6	22	**65**
41550	BRACKETT AVE	DS@374W S 27TH AVE	DS@702W S 27TH AVE	Local	Asphalt	32	327	58	1,221	77	67	60	Mod	V Good	8	15	**73**
42420	BRACKETT AVE	DS@702W S 27TH AVE	S 30TH AVE	Local	Asphalt	32	389	69	1,452	79	59	60	Mod	V Good	9	12	**71**
62940	BRAEBURN LP	S 88TH AVE	S 88TH AVE	Local	Asphalt	32	1,882	335	7,026	77	69	60	Mod	V Good	6	18	**73**
43220	BRISTOL WAY CT	S 53RD AVE	WEST END	Local	Asphalt	31	336	58	1,215	39	31	80	Strng	Poor	32	29	**35**
42780	BRISTOL WY	S 47TH AVE	S 46TH AVE	Local	Asphalt	32	545	97	2,035	36	44	80	Strng	Poor	29	35	**37**
42790	BRISTOL WY	S 47TH AVE	S 48TH AVE	Local	Asphalt	31	231	40	835	30	41	80	Strng	Poor	33	37	**33**
42740	BRISTOL WY	S 48TH AVE	S 49TH AVE	Local	Asphalt	32	266	47	993	68	65	80	Strng	Good	4	28	**66**
42720	BRISTOL WY	S 49TH AVE	S 50TH AVE	Local	Asphalt	32	283	50	1,057	77	57	80	Strng	V Good	0	23	**69**
42610	BRISTOL WY	S 54TH AVE	S 56TH AVE	Local	Asphalt	31	544	94	1,967	55	43	80	Strng	Fair	9	36	**51**
42630	BRISTOL WY	S 56TH AVE	TANARAE PL	Local	Asphalt	31	270	47	977	40	48	80	Strng	Marginal	24	36	**41**
42580	BRISTOL WY	TANARAE PL	DS@218W TANARAE PL	Local	Asphalt	31	218	38	788	42	38	80	Strng	Marginal	25	33	**40**
42550	BRISTOL WY	DS@218W TANARAE PL	S 57TH AVE	Local	Asphalt	31	74	13	268	32	20	80	Strng	Poor	29	39	**27**
42870	BRISTOL WY	S 68TH AVE	S 69TH AVE	Local	Asphalt	34	356	67	1412	62	71	80	Strng	Good	7	32	**63.7**
42770	BRISTOL WY	S 87TH AVE	WEST END	Local	Asphalt	42	255	59	1,249	48	40	80	Strng	Marginal	15	37	**45**
24520	BROWNE AVE	W A ST	DS@101W W A ST	Local	Asphalt	31	101	17	365	50	33	80	Strng	Marginal	19	32	**43.2**
24530	BROWNE AVE	DS@101W W A ST	PIERCE AVE	Local	Asphalt	31	84	14	304	62	41	80	Strng	Fair	9	29	**54**
24380	BROWNE AVE	PIERCE AVE	DS@434W PIERCE AVE	Local	Asphalt	24	434	58	1,215	31	28	80	Strng	Poor	42	27	**29**
24320	BROWNE AVE	DS@434W PIERCE AVE	KERR ST	Local	Asphalt	24	106	14	297	24	45	60	Mod	Poor	49	27	**29**
24340	BROWNE AVE	KERR ST	CUSTER AVE	Local	Asphalt	23	382	49	1,025	23	50	60	Mod	Poor	48	29	**31**
24430	BROWNE AVE	CUSTER AVE	N 11TH AVE	Local	Asphalt	24	389	52	1,089	92	77	60	Mod	Excellent	4	4	**86**
24440	BROWNE AVE	N 11TH AVE	HALL AVE	Local	Asphalt	24	264	35	739	72	55	60	Mod	Good	13	15	**65**
24450	BROWNE AVE	HALL AVE	DS@156W HALL AVE	Local	Composite	24	156	21	437	95	85	60	Mod	Excellent	0	5	**91.2**
24400	BROWNE AVE	DS@156W HALL AVE	DS@333W HALL AVE	Local	Composite	24	177	24	496	82	84	60	Mod	V Good	5	13	**81.9**
24390	BROWNE AVE	DS@333W HALL AVE	N 16TH AVE	Local	Composite	24	726	97	2,033	88	79	60	Mod	V Good	0	12	**84**
24360	BROWNE AVE	N 16TH AVE	DS@441W N 16TH AVE	Local	Concrete	24	441	59	1,235	37	36	60	Mod	Poor	0	0	**36**
24300	BROWNE AVE	DS@441W N 16TH AVE	N 18TH AVE	Local	Concrete	24	396	53	1,109	33	40	60	Mod	Poor	0	0	**34**
24150	BROWNE AVE	PARK AVE	DS@192W PARK AVE	Local	Asphalt	23	192	25	515	75	54	80	Strng	Good	1	24	**67**
24130	BROWNE AVE	DS@192W PARK AVE	N 21ST AVE	Local	Asphalt	24	181	24	507	69	58	80	Strng	Good	9	22	**64**
23820	BROWNE AVE	N 81ST AVE	N 82ND AVE	Local	Asphalt	28	306	48	1,000	81	63	60	Mod	V Good	11	9	**74**
18980	BURNING TREE DR	EAST END	N 34TH AVE	Local	Asphalt	25	398	55	1161	100	90	60	Mod	Excellent	0	0	**95.6**
18990	BURNING TREE DR	N 34TH AVE	N 35TH AVE	Local	Asphalt	26	390	56	1183	36	40	80	Strng	Poor	32	32	**36.6**
51720	BURWELL ST	S 14TH ST	S 15TH ST	Local	Asphalt	23	334	43	896	75	54	60	Mod	Good	10	7	**67**
6140	BUWALDA LN	E I ST	DS@331N E I ST	Local	Asphalt	33	331	61	1,274	56	47	80	Strng	Fair	20	24	**52**
5340	BUWALDA LN	DS@331N E I ST	MURPHY LN	Local	Asphalt	32	524	93	1956	59	44	80	Strng	Fair	17	25	**52.9**
4580	BUWALDA LN	MURPHY LN	BARTLETT PL	Local	Asphalt	32	131	23	489	64	60	80	Strng	Good	8	28	**62**
4530	BUWALDA LN	BARTLETT PL	THORNTON LN	Local	Asphalt	32	171	30	638	74	55	80	Strng	Good	7	19	**66.4**
4310	BUWALDA LN	THORNTON LN	NORTH END	Local	Asphalt	43	150	36	753	76	55	60	Mod	Good	10	14	**68**
11920	CAMPBELL LN	JEROME AVE	SWAN AVE	Local	Asphalt	25	238	33	694	45	40	80	Strng	Marginal	18	37	**42**
11060	CAMPBELL LN	SWAN AVE	DS@219N SWAN AVE	Local	Asphalt	25	219	30	639	49	48	80	Strng	Marginal	20	31	**48**
10300	CAMPBELL LN	DS@219N SWAN AVE	WILLOW ST	Local	Asphalt	24	238	32	666	74	54	80	Strng	Good	6	20	**67**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
27860	CANTERBURY LN	N 28TH AVE	DS@311W N 28TH AVE	Local	Asphalt	24	311	41	871	24	31	80	Strng	Poor	35	42	**25**
27840	CANTERBURY LN	DS@311W N 28TH AVE	WEST END	Local	Asphalt	24	121	16	339	38	38	80	Strng	Poor	32	30	**36.9**
51800	CAROL AVE	S 32ND AVE	S 33RD AVE	Local	Asphalt	32	356	63	1,329	71	52	80	Strng	Good	3	26	**64**
51670	CAROL AVE	S 34TH AVE	DS@331W S 34TH AVE	Local	Asphalt	33	331	61	1,274	72	62	80	Strng	Good	6	22	**68**
51680	CAROL AVE	DS@331W S 34TH AVE	S 36TH AVE	Local	Asphalt	32	340	60	1,269	74	75	80	Strng	V Good	0	26	**74**
51910	CAROL AVE	S 36TH AVE	S 37TH AVE	Local	Asphalt	33	413	76	1,590	37	50	80	Strng	Marginal	29	34	**41**
51930	CAROL AVE	S 37TH AVE	S 38TH AVE	Local	Asphalt	32	251	45	937	56	41	80	Strng	Fair	11	33	**50**
51650	CAROL AVE	EAST END	S 48TH AVE	Local	Asphalt	37	322	67	1,408	67	41	80	Strng	Fair	9	24	**57**
6790	CARRIAGE HILL DR	CONESTOGA BLVD	DS@278W CONESTOGA BLVD	Local	Asphalt	32	278	49	1038	100	90	60	Mod	Excellent	0	0	**95.6**
6500	CARRIAGE HILL DR	DS@278W CONESTOGA BLVD	DS@632W CONESTOGA BLVD	Local	Asphalt	32	354	63	1,322	95	85	60	Mod	Excellent	5	0	**91**
10060	CARRIAGE HILL DR	CONESTOGA BLVD	SURREY LN	Local	Asphalt	31	698	120	2,524	90	70	60	Mod	V Good	10	0	**83**
8060	CARRIAGE HILL DR	SURREY LN	DS@739N SURREY LN	Local	Asphalt	32	739	131	2,759	100	90	60	Mod	Excellent	0	0	**96**
34620	CASA CT	EAST END	DS@97W EAST END	Local	Asphalt	31	97	17	351	73	51	80	Strng	Good	6	21	**65**
34630	CASA CT	DS@97W EAST END	S 39TH AVE	Local	Asphalt	31	144	25	521	62	49	80	Strng	Fair	14	24	**57**
27510	CASCADE DR	N 53RD AVE	DS@212W N 53RD AVE	Local	Asphalt	33	212	39	816	50	41	80	Strng	Marginal	24	26	**46**
27030	CASCADE DR	DS@212W N 53RD AVE	N 54TH AVE	Local	Asphalt	31	339	58	1,226	61	44	80	Strng	Fair	15	24	**55**
26950	CASCADE DR	N 54TH AVE	N 55TH AVE	Truck Route	Asphalt	31	307	53	1,110	62	52	60	Mod	Fair	18	21	**57**
6350	CASCADE LP	N 34TH AVE	CASCADE LP (E)	Local	Asphalt	37	248	51	1071	36	38	80	Strng	Poor	27	37	**35.7**
6420	CASCADE LP	CASCADE LP (E)	CASCADE LP (W)	Local	Asphalt	37	286	59	1,235	49	39	80	Strng	Marginal	21	31	**45**
7150	CASCADE LP (E)	CASCADE LP (W)	CASCADE LP	Local	Asphalt	37	427	88	1,843	35	49	80	Strng	Poor	29	35	**39**
7140	CASCADE LP (W)	CASCADE LP (E)	CASCADE LP	Local	Asphalt	37	419	86	1,809	55	52	80	Strng	Fair	6	39	**53**
7970	CASTLEVALE RD	EAST END	N 24TH AVE	Local	Asphalt	27	343	51	1080	73	52	80	Strng	Good	6	21	**65.7**
7950	CASTLEVALE RD	N 24TH AVE	N 25TH AVE	Minor Arterial	Asphalt	36	324	65	1361	60	26	80	Strng	Marginal	22	18	**46.7**
7960	CASTLEVALE RD	N 25TH AVE	N 26TH AVE	Minor Arterial	Asphalt	31	337	58	1219	58	21	80	Strng	Marginal	22	21	**43.8**
7930	CASTLEVALE RD	N 26TH AVE	DS@265W N 26TH AVE	Minor Arterial	Asphalt	31	265	46	958	61	29	80	Strng	Fair	19	20	**48.8**
7920	CASTLEVALE RD	DS@265W N 26TH AVE	N 28TH AVE	Minor Arterial	Asphalt	30	365	61	1278	65	37	60	Mod	Fair	22	14	**54.1**
7910	CASTLEVALE RD	N 28TH AVE	DS@241W N 28TH AVE	Minor Arterial	Asphalt	34	241	46	956	74	53	80	Strng	Good	0	26	**66**
7880	CASTLEVALE RD	DS@241W N 28TH AVE	N 29TH AVE	Minor Arterial	Asphalt	33	76	14	293	66	39	80	Strng	Fair	12	22	**55**
7870	CASTLEVALE RD	N 29TH AVE	DS@360W N 29TH AVE	Minor Arterial	Asphalt	34	360	68	1,428	55	34	60	Mod	Marginal	28	17	**46**
7810	CASTLEVALE RD	DS@360W N 29TH AVE	DS@662W N 29TH AVE	Minor Arterial	Asphalt	34	302	57	1,198	62	31	80	Strng	Fair	18	20	**50**
7830	CASTLEVALE RD	DS@662W N 29TH AVE	N 32ND AVE	Minor Arterial	Asphalt	29	336	54	1137	65	38	80	Strng	Fair	13	22	**54.6**
7820	CASTLEVALE RD	N 32ND AVE	DS@379W N 32ND AVE	Minor Arterial	Asphalt	26	379	55	1150	73	51	60	Mod	Good	16	11	**64.5**
7800	CASTLEVALE RD	DS@379W N 32ND AVE	N 34TH AVE	Minor Arterial	Asphalt	30	276	46	966	61	29	60	Mod	Fair	25	14	**48.5**
7780	CASTLEVALE RD	N 34TH AVE	DS@323W N 34TH AVE	Minor Arterial	Asphalt	30	323	54	1131	70	47	60	Mod	Good	16	14	**60.9**
7790	CASTLEVALE RD	DS@323W N 34TH AVE	DS@647W N 34TH AVE	Minor Arterial	Asphalt	34	324	61	1,285	80	61	60	Mod	V Good	9	11	**73**
7640	CASTLEVALE RD	DS@647W N 34TH AVE	POWERHOUSE RD	Minor Arterial	Asphalt	31	367	63	1,327	80	60	60	Mod	V Good	10	10	**72**
7400	CASTLEVALE RD	EAST END	N 39TH AVE	Local	Asphalt	38	217	46	974	60	53	80	Strng	Fair	13	27	**56.9**
72950	CASTLEVALE RD	N 39TH AVE	N 40TH AVE	Local	Asphalt	35	385	75	1,572	31	41	80	Strng	Poor	37	32	**33**
53750	CASTLEVIEW DR	S 48TH AVE	S 49TH PL	Local	Asphalt	30	175	29	613	31	27	80	Strng	Poor	42	27	**29**
53730	CASTLEVIEW DR	S 49TH PL	DS@286W S 49TH PL	Local	Asphalt	30	286	48	1001	33	37	80	Strng	Poor	35	32	**33.7**
53710	CASTLEVIEW DR	DS@286W S 49TH PL	DS@502W S 49TH PL	Local	Asphalt	30	216	36	756	68	44	80	Strng	Good	9	22	**59.1**
53560	CASTLEVIEW DR	DS@502W S 49TH PL	W VIOLA AVE	Local	Asphalt	30	147	25	515	70	47	80	Strng	Good	8	22	**61**
57950	CEDAR HILLS CT	EAST END	S 18TH AVE	Local	Asphalt	36	322	64	1,343	46	34	80	Strng	Marginal	22	31	**41**
47030	CENTRAL AVE	S 18TH ST	DS@355E S 18TH ST	Local	Asphalt	35	355	69	1,450	36	61	60	Mod	Marginal	37	27	**43**
46910	CENTRAL AVE	S 6TH ST	DS@273E S 6TH ST	Local	Asphalt	32	273	49	1019	51	57	60	Mod	Fair	22	27	**52**
46930	CENTRAL AVE	DS@273E S 6TH ST	S 7TH ST	Local	Asphalt	31	166	29	600	58	62	80	Strng	Fair	11	31	**58**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
46940	CENTRAL AVE	S 7TH ST	S 8TH ST	Local	Asphalt	31	165	28	597	67	53	80	Strng	Good	5	28	**62**
46960	CENTRAL AVE	S 8TH ST	S 8TH ST	Local	Asphalt	31	165	28	597	70	58	80	Strng	Good	4	26	**65**
46970	CENTRAL AVE	S 8TH ST	DS@162E S 8TH ST	Local	Asphalt	32	162	29	605	68	53	80	Strng	Good	5	26	**62**
46980	CENTRAL AVE	DS@162E S 8TH ST	DS@301E S 8TH ST	Local	Asphalt	33	139	25	535	34	60	60	Mod	Marginal	34	32	**41**
47110	CENTRAL AVE	DS@301E S 8TH ST	S FAIR AVE	Local	Asphalt	31	532	92	1924	53	68	80	Strng	Fair	12	34	**57.4**
24470	CENTURY AVE	EAST END	N 65TH PL	Local	Asphalt	32	147	26	549	44	47	80	Strng	Marginal	20	36	**44.1**
24490	CENTURY AVE	N 65TH PL	N 66TH AVE	Local	Asphalt	32	180	32	672	49	39	80	Strng	Marginal	18	33	**45**
23630	CHALMERS ST	E CHESTNUT AVE	RIVERSIDE ST	Local	Asphalt	45	640	160	3360	65	69	60	Mod	Good	14	21	**65.4**
26770	CHALMERS ST	RIVERSIDE ST	E MAPLE ST	Local	Asphalt	34	642	121	2547	68	65	60	Mod	Good	13	20	**65.7**
30270	CHALMERS ST	E MAPLE ST	E BEECH ST	Local	Asphalt	22	719	88	1845	66	53	80	Strng	Good	13	21	**60.7**
14610	CHERRY AVE	EAST END	DS@202W EAST END	Local	Asphalt	38	202	43	896	42	60	80	Strng	Marginal	23	35	**46.7**
14600	CHERRY AVE	DS@202W EAST END	DS@357W EAST END	Local	Asphalt	38	155	33	687	34	44	80	Strng	Poor	32	34	**36.3**
14590	CHERRY AVE	DS@357W EAST END	N 3RD AVE	Local	Asphalt	33	212	39	816	63	49	80	Strng	Fair	12	25	**57**
14630	CHERRY AVE	N 3RD AVE	DS@213W N 3RD AVE	Local	Asphalt	33	213	39	820	65	45	60	Mod	Fair	19	17	**57**
14540	CHERRY AVE	DS@213W N 3RD AVE	N 4TH AVE	Local	Asphalt	33	201	37	774	71	66	60	Mod	Good	12	17	**68**
14560	CHERRY AVE	N 4TH AVE	DS@179W N 4TH AVE	Local	Asphalt	32	179	32	668	81	62	60	Mod	V Good	5	15	**74**
14570	CHERRY AVE	DS@179W N 4TH AVE	N 5TH AVE	Local	Asphalt	31	167	29	604	72	49	60	Mod	Good	13	16	**63**
14530	CHERRY AVE	N 5TH AVE	DS@175W N 5TH AVE	Local	Asphalt	32	175	31	653	79	60	60	Mod	V Good	2	19	**72**
14510	CHERRY AVE	DS@175W N 5TH AVE	N 6TH AVE	Local	Asphalt	32	164	29	612	77	57	60	Mod	V Good	9	14	**69**
14500	CHERRY AVE	N 6TH AVE	OREGON AVE	Local	Asphalt	24	471	63	1,319	66	49	80	Strng	Good	9	25	**60**
14420	CHERRY AVE	OREGON AVE	CUSTER AVE	Local	Asphalt	24	474	63	1,327	66	50	80	Strng	Good	8	26	**60**
14440	CHERRY AVE	CUSTER AVE	CLARKE AVE	Local	Asphalt	23	465	59	1248	71	56	80	Strng	Good	8	21	**65**
14390	CHERRY AVE	CLARKE AVE	LEWIS AVE	Local	Asphalt	24	439	59	1229	59	43	80	Strng	Fair	19	22	**53.2**
14410	CHERRY AVE	LEWIS AVE	DS@315W LEWIS AVE	Local	Asphalt	25	315	44	919	61	54	60	Mod	Fair	20	19	**57**
14380	CHERRY AVE	DS@315W LEWIS AVE	N 16TH AVE	Local	Asphalt	25	496	69	1,447	68	55	80	Strng	Good	10	22	**63**
31820	CHERRY PARK DR	EAST END	N 50TH AVE	Local	Asphalt	45	82	21	434	43	23	80	Strng	Poor	29	27	**35**
18390	CHERRY RIDGE CT	N 66TH AVE	DS@216W N 66TH AVE	Local	Asphalt	34	216	41	857	74	53	80	Strng	Good	0	26	**66**
18370	CHERRY RIDGE CT	DS@216W N 66TH AVE	NORTH END	Local	Asphalt	41	354	80	1,673	62	49	80	Strng	Fair	10	28	**57**
20960	CHESTNUT AVE	S 15TH ST	DS@327E S 15TH ST	Local	Asphalt	35	327	64	1,335	63	63	60	Mod	Good	13	24	**62**
21000	CHESTNUT AVE	DS@327E S 15TH ST	S 17TH ST	Local	Asphalt	35	343	67	1,401	78	60	60	Mod	V Good	6	16	**71**
21010	CHESTNUT AVE	S 17TH ST	CHALMERS ST	Local	Asphalt	44	260	64	1,335	56	57	80	Strng	Fair	18	27	**55**
19800	CHESTNUT AVE	S FAIR AVE	S 12TH ST	Local	Asphalt	22	198	24	508	79	60	60	Mod	V Good	15	6	**72**
19870	CHESTNUT AVE	S 12TH ST	S 13TH ST	Local	Asphalt	31	354	61	1,280	47	64	80	Strng	Fair	9	35	**52**
20750	CHESTNUT AVE	S 8TH ST	DS@186E S 8TH ST	Local	Asphalt	31	186	32	673	42	48	60	Mod	Marginal	31	26	**43**
19990	CHESTNUT AVE	DS@186E S 8TH ST	UNION ST	Local	Asphalt	31	180	31	651	34	31	80	Strng	Poor	36	31	**32**
19660	CHESTNUT AVE	UNION ST	S 10TH ST	Local	Asphalt	32	677	120	2527	73	52	60	Mod	Good	10	17	**65.2**
19780	CHESTNUT AVE	S 10TH ST	S FAIR AVE	Local	Asphalt	32	683	121	2550	55	46	80	Strng	Fair	19	27	**50.6**
21400	CHESTNUT AVE	S 6TH ST	DS@200E S 6TH ST	Local	Asphalt	32	200	36	747	57	48	80	Strng	Fair	17	25	**52.9**
21260	CHESTNUT AVE	DS@200E S 6TH ST	S 7TH ST	Local	Asphalt	31	186	32	673	35	39	80	Strng	Poor	29	36	**35.1**
21060	CHESTNUT AVE	S 7TH ST	DS@192E S 7TH ST	Local	Asphalt	32	192	34	717	47	52	80	Strng	Marginal	22	31	**48**
20940	CHESTNUT AVE	DS@192E S 7TH ST	S 8TH ST	Local	Asphalt	32	193	34	721	41	46	80	Strng	Marginal	25	34	**42**
23940	CHESTNUT AVE	S 1ST ST	DS@200E S 1ST ST	Local	Asphalt	52	200	58	1,213	58	37	80	Strng	Fair	13	28	**50**
23740	CHESTNUT AVE	DS@200E S 1ST ST	S 2ND ST	Local	Asphalt	52	197	57	1,195	54	49	80	Strng	Fair	12	33	**52**
23550	CHESTNUT AVE	S 2ND ST	DS@206E S 2ND ST	Local	Asphalt	51	206	58	1,226	46	52	80	Strng	Marginal	20	33	**47**
23290	CHESTNUT AVE	DS@206E S 2ND ST	S 3RD ST	Local	Asphalt	51	198	56	1178	44	42	80	Strng	Marginal	22	34	**42.3**
23110	CHESTNUT AVE	S 3RD ST	DS@202E S 3RD ST	Local	Asphalt	51	202	57	1202	56	43	80	Strng	Fair	14	29	**50.9**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
22690	CHESTNUT AVE	DS@202E S 3RD ST	S 4TH ST	Local	Asphalt	51	194	55	1154	50	56	80	Strng	Fair	13	36	**51.2**
22500	CHESTNUT AVE	S 4TH ST	DS@206E S 4TH ST	Local	Asphalt	38	206	43	913	54	47	80	Strng	Fair	6	40	**50.3**
22300	CHESTNUT AVE	DS@206E S 4TH ST	S NACHES AVE	Local	Asphalt	38	217	46	962	52	44	80	Strng	Marginal	10	38	**48.5**
22110	CHESTNUT AVE	S NACHES AVE	DS@220E S NACHES AVE	Local	Asphalt	40	220	49	1027	81	62	60	Mod	V Good	13	6	**73.7**
21840	CHESTNUT AVE	DS@220E S NACHES AVE	S 6TH ST	Local	Asphalt	31	201	35	727	66	39	60	Mod	Fair	20	14	**55.8**
24500	CHESTNUT AVE	S FRONT ST	DS@184E S FRONT ST	Local	Asphalt	52	184	53	1,116	56	66	80	Strng	Fair	7	37	**59**
24110	CHESTNUT AVE	DS@184E S FRONT ST	S 1ST ST	Local	Asphalt	52	203	59	1,232	55	50	80	Strng	Fair	8	36	**53**
26740	CHESTNUT AVE	S 2ND AVE	DS@199W S 2ND AVE	Local	Asphalt	51	199	56	1,184	45	57	60	Mod	Marginal	27	27	**48**
27010	CHESTNUT AVE	DS@199W S 2ND AVE	S 3RD AVE	Local	Asphalt	49	202	55	1,155	64	45	80	Strng	Fair	13	23	**56**
27460	CHESTNUT AVE	S 3RD AVE	DS@200W S 3RD AVE	Local	Asphalt	49	200	54	1143	81	62	80	Strng	V Good	0	19	**73.9**
27610	CHESTNUT AVE	DS@200W S 3RD AVE	S 4TH AVE	Local	Asphalt	50	201	56	1,173	73	51	80	Strng	Good	1	26	**65**
28010	CHESTNUT AVE	S 4TH AVE	DS@199W S 4TH AVE	Local	Asphalt	48	199	53	1,114	40	50	80	Strng	Marginal	20	40	**42**
28250	CHESTNUT AVE	DS@199W S 4TH AVE	S 5TH AVE	Local	Asphalt	49	200	54	1143	50	39	80	Strng	Marginal	14	36	**45.6**
28480	CHESTNUT AVE	S 5TH AVE	DS@200W S 5TH AVE	Local	Asphalt	49	200	54	1,143	45	54	80	Strng	Marginal	25	30	**46**
28840	CHESTNUT AVE	DS@200W S 5TH AVE	S 6TH AVE	Local	Asphalt	49	200	54	1143	48	36	80	Strng	Marginal	25	27	**42.9**
29080	CHESTNUT AVE	S 6TH AVE	DS@201W S 6TH AVE	Local	Asphalt	29	201	32	680	40	51	80	Strng	Marginal	28	31	**43**
29440	CHESTNUT AVE	DS@201W S 6TH AVE	S 7TH AVE	Local	Asphalt	30	187	31	655	47	39	80	Strng	Marginal	23	29	**44**
29890	CHESTNUT AVE	S 7TH AVE	DS@192W S 7TH AVE	Local	Asphalt	29	192	31	650	71	52	60	Mod	Good	14	15	**64**
30070	CHESTNUT AVE	DS@192W S 7TH AVE	S 8TH AVE	Local	Asphalt	28	189	29	617	96	86	60	Mod	Excellent	0	4	**92**
30290	CHESTNUT AVE	S 8TH AVE	DS@189W S 8TH AVE	Local	Asphalt	31	189	33	684	97	88	60	Mod	Excellent	0	3	**92.8**
30500	CHESTNUT AVE	DS@189W S 8TH AVE	S 9TH AVE	Local	Asphalt	29	190	31	643	93	86	60	Mod	Excellent	0	7	**89.7**
30710	CHESTNUT AVE	S 9TH AVE	DS@190W S 9TH AVE	Local	Asphalt	28	190	30	621	94	85	60	Mod	Excellent	5	1	**90.5**
31280	CHESTNUT AVE	DS@190W S 9TH AVE	S 10TH AVE	Local	Asphalt	35	187	36	764	90	70	60	Mod	V Good	0	11	**82.4**
31420	CHESTNUT AVE	S 10TH AVE	DS@192W S 10TH AVE	Local	Asphalt	29	192	31	650	96	87	60	Mod	Excellent	0	4	**92**
31620	CHESTNUT AVE	DS@192W S 10TH AVE	S 11TH AVE	Local	Asphalt	30	187	31	655	98	89	60	Mod	Excellent	0	2	**94.5**
32150	CHESTNUT AVE	S 11TH AVE	DS@195W S 11TH AVE	Local	Asphalt	29	195	31	660	62	46	80	Strng	Fair	5	33	**55.5**
32440	CHESTNUT AVE	DS@195W S 11TH AVE	S 12TH AVE	Local	Asphalt	29	184	30	623	52	29	80	Strng	Marginal	20	27	**43.8**
70170	CHESTNUT AVE	S 12TH AVE	S 14TH AVE	Local	Asphalt	25	522	73	1523	50	64	80	Strng	Fair	20	30	**53.5**
70090	CHESTNUT AVE	S 14TH AVE	S 14TH AVE	Local	Asphalt	26	186	27	564	56	69	80	Strng	Good	10	34	**59.6**
33240	CHESTNUT AVE	S 14TH AVE	DS@165W S 14TH AVE	Local	Asphalt	27	165	25	520	61	67	80	Strng	Good	7	32	**62.2**
33250	CHESTNUT AVE	DS@165W S 14TH AVE	S 15TH AVE	Local	Asphalt	27	76	11	239	47	53	80	Strng	Marginal	19	34	**47.9**
33230	CHESTNUT AVE	S 15TH AVE	S 15TH AVE	Local	Asphalt	26	87	13	264	55	56	80	Strng	Fair	10	36	**54.1**
33210	CHESTNUT AVE	S 15TH AVE	DS@166W S 15TH AVE	Local	Asphalt	27	166	25	523	50	70	80	Strng	Fair	10	40	**55.5**
33200	CHESTNUT AVE	DS@166W S 15TH AVE	S 16TH AVE	Local	Asphalt	26	165	24	501	45	30	80	Strng	Poor	23	32	**39**
33190	CHESTNUT AVE	S 16TH AVE	DS@169W S 16TH AVE	Local	Asphalt	21	169	20	414	43	39	80	Strng	Marginal	27	30	**40.8**
33260	CHESTNUT AVE	DS@169W S 16TH AVE	S 17TH AVE	Local	Asphalt	22	167	20	429	50	59	80	Strng	Fair	21	29	**52**
33350	CHESTNUT AVE	S 17TH AVE	S 18TH AVE	Local	Asphalt	24	329	44	921	51	50	80	Strng	Fair	16	33	**50**
33450	CHESTNUT AVE	S 18TH AVE	S 18TH AVE	Local	Asphalt	32	62	11	231	61	65	80	Strng	Good	0	39	**62**
33470	CHESTNUT AVE	S 18TH AVE	S 19TH AVE	Local	Asphalt	21	291	34	713	64	62	80	Strng	Good	7	29	**62.5**
33440	CHESTNUT AVE	S 19TH AVE	DS@300W S 19TH AVE	Local	Asphalt	22	300	37	770	48	53	80	Strng	Fair	20	32	**49**
33390	CHESTNUT AVE	DS@300W S 19TH AVE	DS@437W S 19TH AVE	Local	Asphalt	21	137	16	336	48	60	80	Strng	Fair	22	30	**51**
33370	CHESTNUT AVE	DS@437W S 19TH AVE	STANLEY BLVD	Local	Asphalt	21	421	49	1,031	59	56	80	Strng	Fair	15	26	**57**
33340	CHESTNUT AVE	STANLEY BLVD	S 22ND AVE	Local	Asphalt	22	108	13	277	49	55	80	Strng	Fair	19	32	**50**
33330	CHESTNUT AVE	S 22ND AVE	LESTER AVE	Local	Asphalt	23	100	13	268	47	50	80	Strng	Marginal	23	30	**47**
33310	CHESTNUT AVE	LESTER AVE	ARTHUR BLVD	Local	Asphalt	24	188	25	526	56	66	80	Strng	Fair	10	34	**58.2**
33280	CHESTNUT AVE	ARTHUR BLVD	S 23RD AVE	Local	Asphalt	25	47	7	137	63	44	80	Strng	Fair	6	32	**55.5**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
33300	CHESTNUT AVE	S 23RD AVE	HENRY AVE	Local	Asphalt	26	116	17	352	60	53	80	Strng	Fair	4	35	**56.9**
33270	CHESTNUT AVE	HENRY AVE	S 24TH AVE	Local	Asphalt	22	216	26	554	60	44	80	Strng	Fair	7	33	**53.8**
33170	CHESTNUT AVE	S 24TH AVE	S 25TH AVE	Local	Asphalt	22	326	40	837	56	54	80	Strng	Fair	13	31	**54.6**
33150	CHESTNUT AVE	S 25TH AVE	S 26TH AVE	Local	Asphalt	21	331	39	811	55	69	80	Strng	Fair	14	30	**59**
33120	CHESTNUT AVE	S 26TH AVE	DS@343W S 26TH AVE	Local	Asphalt	22	343	42	880	66	76	60	Mod	Good	12	22	**69**
33080	CHESTNUT AVE	DS@343W S 26TH AVE	S 28TH AVE	Local	Asphalt	21	298	35	730	64	64	80	Strng	Good	1	35	**63**
33010	CHESTNUT AVE	S 28TH AVE	S 29TH AVE	Local	Asphalt	21	339	40	831	73	65	60	Mod	V Good	10	17	**69**
32860	CHESTNUT AVE	S 29TH AVE	S 30TH AVE	Local	Asphalt	22	339	41	870	62	72	60	Mod	Good	20	18	**64**
32710	CHESTNUT AVE	S 30TH AVE	S 31ST AVE	Local	Asphalt	22	329	40	844	54	69	60	Mod	Fair	20	27	**58**
32630	CHESTNUT AVE	S 31ST AVE	S 32ND AVE	Local	Asphalt	22	330	40	847	64	49	80	Strng	Fair	11	25	**58**
32560	CHESTNUT AVE	S 32ND AVE	S 33RD AVE	Local	Asphalt	22	329	40	844	61	47	80	Strng	Fair	14	25	**56**
32570	CHESTNUT AVE	S 33RD AVE	S 34TH AVE	Local	Asphalt	21	334	39	818	68	52	80	Strng	Good	10	23	**61.4**
32640	CHESTNUT AVE	S 34TH AVE	S 35TH AVE	Local	Asphalt	22	325	40	834	62	61	60	Mod	Good	15	23	**60.7**
32650	CHESTNUT AVE	S 35TH AVE	DS@126W S 35TH AVE	Local	Asphalt	20	126	14	294	70	72	80	Strng	V Good	3	27	**70**
32670	CHESTNUT AVE	DS@126W S 35TH AVE	S 36TH AVE	Local	Asphalt	22	205	25	526	69	64	80	Strng	Good	5	26	**67**
32720	CHESTNUT AVE	S 36TH AVE	N 37TH AVE	Local	Asphalt	22	438	54	1,124	65	64	60	Mod	Good	13	22	**63**
32740	CHESTNUT AVE	N 37TH AVE	N 39TH AVE	Local	Asphalt	22	550	67	1412	63	49	80	Strng	Fair	10	20	**57.7**
32800	CHESTNUT AVE	N 39TH AVE	S 40TH AVE	Local	Asphalt	20	354	39	826	51	49	60	Mod	Fair	25	24	**48.8**
32820	CHESTNUT AVE	S 40TH AVE	N 41ST AVE	Local	Asphalt	22	310	38	796	65	44	80	Strng	Fair	16	19	**56.9**
32890	CHESTNUT AVE	N 41ST AVE	WESTOVER DR	Local	Asphalt	22	168	21	431	68	61	60	Mod	Good	17	15	**65**
32900	CHESTNUT AVE	WESTOVER DR	N 42ND AVE	Local	Asphalt	25	161	22	470	66	64	60	Mod	Good	16	18	**64**
32930	CHESTNUT AVE	N 42ND AVE	DS@332W N 42ND AVE	Local	Asphalt	29	332	53	1,123	69	67	60	Mod	Good	11	20	**67**
32940	CHESTNUT AVE	DS@332W N 42ND AVE	BEL AIR DR	Local	Asphalt	28	152	24	497	75	79	60	Mod	V Good	11	14	**75**
32950	CHESTNUT AVE	BEL AIR DR	S 44TH AVE	Local	Asphalt	26	188	27	570	52	42	80	Strng	Marginal	22	26	**47**
32970	CHESTNUT AVE	S 44TH AVE	S 45TH AVE	Local	Asphalt	24	311	41	871	69	44	80	Strng	Good	14	17	**59.6**
33040	CHESTNUT AVE	S 45TH AVE	S 46TH AVE	Local	Asphalt	28	337	52	1,101	75	66	60	Mod	V Good	11	14	**71**
33060	CHESTNUT AVE	S 46TH AVE	S 47TH AVE	Local	Asphalt	23	319	41	856	69	44	80	Strng	Good	14	17	**59.9**
33070	CHESTNUT AVE	S 47TH AVE	S 48TH AVE	Local	Asphalt	24	335	45	938	75	58	60	Mod	Good	6	20	**69**
33030	CHESTNUT AVE	S 48TH AVE	N 49TH AVE	Local	Asphalt	20	326	36	761	73	54	60	Mod	Good	12	15	**65.4**
32990	CHESTNUT AVE	N 49TH AVE	DS@165W N 49TH AVE	Local	Asphalt	26	165	24	501	62	72	60	Mod	Good	21	17	**64**
32920	CHESTNUT AVE	DS@165W N 49TH AVE	S 50TH AVE	Local	Asphalt	27	321	48	1,011	49	68	60	Mod	Fair	35	17	**54**
32790	CHESTNUT AVE	S 50TH AVE	N 50TH AVE	Local	Asphalt	31	58	10	210	45	58	60	Mod	Marginal	36	19	**48**
32770	CHESTNUT AVE	N 50TH AVE	PEACHTREE LN	Local	Asphalt	27	183	27	576	57	71	60	Mod	Good	29	14	**61**
32600	CHESTNUT AVE	PEACHTREE LN	PLUM LN	Local	Asphalt	31	207	36	749	72	70	60	Mod	V Good	15	13	**70**
32620	CHESTNUT AVE	PLUM LN	S 53RD AVE	Local	Asphalt	35	566	110	2,311	31	60	60	Mod	Marginal	38	32	**39**
32530	CHESTNUT AVE	S 53RD AVE	DS@210W S 53RD AVE	Local	Asphalt	37	210	43	907	13	61	60	Mod	Poor	54	33	**28**
32510	CHESTNUT AVE	DS@210W S 53RD AVE	S 55TH AVE	Local	Asphalt	37	359	74	1550	15	51	60	Mod	Poor	51	34	**25.9**
32500	CHESTNUT AVE	S 55TH AVE	S 56TH AVE	Local	Asphalt	36	313	63	1315	20	46	80	Strng	Poor	45	35	**28**
32480	CHESTNUT AVE	S 56TH AVE	S 57TH AVE	Local	Asphalt	33	331	61	1274	62	56	60	Mod	Good	19	19	**58.8**
32460	CHESTNUT AVE	S 57TH AVE	N 58TH AVE	Local	Asphalt	41	363	83	1,736	61	60	60	Mod	Good	18	21	**60**
32430	CHESTNUT AVE	N 58TH AVE	N 59TH AVE	Local	Asphalt	37	310	64	1,338	72	75	60	Mod	V Good	9	19	**72**
32410	CHESTNUT AVE	N 59TH AVE	S 60TH AVE	Local	Asphalt	33	339	62	1,305	63	70	60	Mod	Good	13	23	**64**
32380	CHESTNUT AVE	S 60TH AVE	S 61ST AVE	Local	Asphalt	34	336	63	1,333	60	47	80	Strng	Fair	16	24	**55**
32360	CHESTNUT AVE	S 61ST AVE	S 62ND AVE	Local	Asphalt	35	336	65	1,372	67	61	60	Mod	Good	11	22	**64**
32310	CHESTNUT AVE	S 62ND AVE	S 63RD AVE	Local	Asphalt	31	273	47	987	51	69	60	Mod	Fair	20	29	**56**
32270	CHESTNUT AVE	S 63RD AVE	S 64TH AVE	Local	Asphalt	25	268	37	782	49	66	60	Mod	Fair	22	30	**53**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
32260	CHESTNUT AVE	S 64TH AVE	S 65TH AVE	Local	Asphalt	23	267	34	716	52	66	60	Mod	Fair	25	23	**55**
32250	CHESTNUT AVE	S 65TH AVE	N 65TH AVE	Local	Asphalt	30	136	23	476	73	54	80	Strng	Good	8	19	**66**
32240	CHESTNUT AVE	N 65TH AVE	PARSONS AVE	Local	Asphalt	30	128	21	448	69	47	80	Strng	Good	10	21	**61**
32220	CHESTNUT AVE	PARSONS AVE	DS@131W PARSONS AVE	Local	Asphalt	30	131	22	459	87	68	60	Mod	V Good	0	13	**80**
32200	CHESTNUT AVE	DS@131W PARSONS AVE	S 66TH AVE	Local	Asphalt	22	123	15	316	55	45	80	Strng	Fair	20	25	**51**
71680	CHESTNUT AVE	S 66TH AVE	S 67TH AVE	Local	Asphalt	29	475	77	1,607	40	51	80	Strng	Marginal	30	24	**42**
32180	CHESTNUT AVE	S 67TH AVE	S 68TH AVE	Local	Asphalt	31	355	61	1,284	55	57	60	Mod	Fair	28	17	**55**
32170	CHESTNUT AVE	S 68TH AVE	S 69TH AVE	Local	Asphalt	29	326	53	1,103	96	87	60	Mod	Excellent	0	4	**92**
32130	CHESTNUT AVE	S 69TH AVE	S 70TH AVE	Local	Asphalt	28	336	52	1,098	87	68	60	Mod	V Good	4	8	**80**
71230	CHESTNUT AVE	S 70TH AVE	N 70TH AVE	Local	Asphalt	29	166	27	562	80	71	60	Mod	V Good	5	15	**76**
32060	CHESTNUT AVE	N 70TH AVE	S 72ND AVE	Local	Asphalt	30	326	54	1,141	82	64	60	Mod	V Good	3	14	**75**
32010	CHESTNUT AVE	S 72ND AVE	N 73RD AVE	Local	Asphalt	27	294	44	926	80	61	80	Strng	V Good	0	20	**73**
32030	CHESTNUT AVE	N 73RD AVE	N 74TH AVE	Local	Asphalt	29	345	56	1,167	84	66	60	Mod	V Good	5	11	**77**
32190	CHESTNUT AVE	S 74TH AVE	DS@263W S 74TH AVE	Local	Asphalt	28	263	41	859	51	41	80	Strng	Marginal	19	30	**46**
32140	CHESTNUT AVE	DS@263W S 74TH AVE	S 76TH AVE	Local	Asphalt	29	287	46	971	63	55	80	Strng	Good	4	33	**60**
31970	CHESTNUT AVE	EAST END	S 77TH AVE	Local	Asphalt	34	331	63	1,313	62	47	80	Strng	Fair	5	32	**56**
31960	CHESTNUT AVE	S 77TH AVE	S 78TH AVE	Local	Asphalt	34	284	54	1,127	64	35	80	Strng	Fair	11	26	**53**
31790	CHESTNUT AVE	N 88TH AVE	S 89TH AVE	Local	Asphalt	28	308	48	1,006	71	74	60	Mod	V Good	9	21	**71**
31830	CHESTNUT AVE	S 89TH AVE	N 90TH AVE	Local	Asphalt	29	516	83	1,746	86	99	60	Mod	Excellent	3	10	**90**
31850	CHESTNUT AVE	N 90TH AVE	S 91ST AVE	Local	Asphalt	28	324	50	1,058	83	76	60	Mod	V Good	3	13	**80**
31730	CHESTNUT AVE	S 91ST AVE	S 92ND AVE	Local	Asphalt	30	169	28	592	84	65	60	Mod	V Good	4	12	**77**
31660	CHESTNUT AVE	S 92ND AVE	DS@503W S 92ND AVE	Local	Asphalt	29	503	81	1,702	68	74	60	Mod	V Good	8	24	**69**
31600	CHESTNUT AVE	DS@503W S 92ND AVE	S 94TH AVE	Local	Asphalt	28	334	52	1,091	47	60	80	Strng	Fair	16	37	**51**
31700	CHESTNUT AVE	S 94TH AVE	N 96TH AVE	Local	Asphalt	28	496	77	1620	45	54	80	Strng	Marginal	15	40	**47**
30810	CHICAGO AVE	W YAKIMA AVE	W A ST	Local	Asphalt	31	760	131	2749	75	57	60	Mod	Good	9	15	**68.5**
28280	CHINOOK DR	EAST END	N 66TH AVE	Local	Asphalt	39	356	77	1,619	64	56	80	Strng	Good	12	24	**60**
28450	CHINOOK DR	N 66TH AVE	N 67TH AVE	Local	Asphalt	32	338	60	1262	55	39	80	Strng	Marginal	22	24	**48.2**
28930	CHINOOK DR	N 68TH PL	N 69TH AVE	Local	Asphalt	31	84	14	304	78	59	80	Strng	V Good	0	22	**71**
29100	CHINOOK DR	N 69TH AVE	N 71ST AVE	Local	Asphalt	32	742	132	2770	70	61	80	Strng	Good	3	27	**66.2**
35820	CHISHOLM TL	WESTOVER DR	W WALNUT ST	Local	Asphalt	31	697	120	2521	53	43	80	Strng	Marginal	17	29	**48.8**
36610	CHISHOLM TL	W WALNUT ST	DS@203S W WALNUT ST	Local	Asphalt	32	203	36	758	57	43	80	Strng	Fair	13	30	**51.5**
36870	CHISHOLM TL	DS@203S W WALNUT ST	BELL AVE	Local	Asphalt	31	96	17	347	54	42	80	Strng	Marginal	16	30	**48.8**
20630	CLARKE AVE	W LINCOLN AVE	DS@161N W LINCOLN AVE	Local	Asphalt	24	161	21	451	77	58	80	Strng	V Good	0	23	**70**
19370	CLARKE AVE	DS@161N W LINCOLN AVE	GARFIELD AVE	Local	Asphalt	23	164	21	440	72	57	60	Mod	Good	11	18	**65.4**
18890	CLARKE AVE	GARFIELD AVE	DS@166N GARFIELD AVE	Local	Asphalt	25	166	23	484	61	41	80	Strng	Fair	15	24	**53.2**
17760	CLARKE AVE	DS@166N GARFIELD AVE	MCKINLEY AVE	Local	Asphalt	24	161	21	451	71	49	80	Strng	Good	1	28	**63**
17220	CLARKE AVE	MCKINLEY AVE	DS@169N MCKINLEY AVE	Local	Asphalt	23	169	22	453	62	45	60	Mod	Fair	19	19	**55**
16440	CLARKE AVE	DS@169N MCKINLEY AVE	ROOSEVELT AVE	Local	Asphalt	23	160	20	429	68	58	80	Strng	Good	6	26	**63.7**
15990	CLARKE AVE	ROOSEVELT AVE	DS@164N ROOSEVELT AVE	Local	Asphalt	24	164	22	459	75	55	80	Strng	Good	4	21	**68**
15040	CLARKE AVE	DS@164N ROOSEVELT AVE	CHERRY AVE	Local	Asphalt	24	177	24	496	74	67	60	Mod	V Good	6	20	**70.9**
14330	CLARKE AVE	CHERRY AVE	DS@164N CHERRY AVE	Local	Asphalt	24	164	22	459	75	58	80	Strng	Good	5	20	**69**
13460	CLARKE AVE	DS@164N CHERRY AVE	FAIRBANKS AVE	Local	Asphalt	24	167	22	468	79	59	80	Strng	V Good	0	22	**71**
22990	CLARKE AVE	FOLSOM AVE	DS@155N FOLSOM AVE	Local	Asphalt	24	155	21	434	76	56	80	Strng	Good	4	20	**68.5**
22430	CLARKE AVE	DS@155N FOLSOM AVE	JEFFERSON AVE	Local	Asphalt	24	164	22	459	82	63	60	Mod	V Good	5	13	**74.6**
21890	CLARKE AVE	JEFFERSON AVE	DS@164N JEFFERSON AVE	Local	Asphalt	24	164	22	459	77	65	80	Strng	V Good	0	23	**72.1**
21160	CLARKE AVE	DS@164N JEFFERSON AVE	W LINCOLN AVE	Local	Asphalt	25	162	23	473	81	62	60	Mod	V Good	4	15	**73.7**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
25940	CLEMAN AVE	SUMMITVIEW AVE	N 30TH AVE	Local	Asphalt	24	803	107	2248	51	35	80	Strng	Marginal	28	21	**44.4**
51330	CLINTON PL	CLINTON WY	SOUTH END	Local	Asphalt	43	113	27	569	55	33	80	Strng	Marginal	10	35	**47**
51270	CLINTON WY	S 24TH AVE	DS@357W S 24TH AVE	Local	Asphalt	32	357	63	1333	74	53	60	Mod	Good	9	17	**65.7**
51250	CLINTON WY	DS@357W S 24TH AVE	DS@669W S 24TH AVE	Local	Asphalt	32	312	55	1165	60	51	60	Mod	Fair	21	19	**56**
51240	CLINTON WY	DS@669W S 24TH AVE	DS@993W S 24TH AVE	Local	Asphalt	32	324	58	1210	65	55	60	Mod	Good	16	18	**60.9**
51230	CLINTON WY	DS@993W S 24TH AVE	S 28TH AVE	Local	Asphalt	32	508	90	1,897	72	51	80	Strng	Good	4	25	**64**
51220	CLINTON WY	S 28TH AVE	S 29TH AVE	Local	Asphalt	32	286	51	1,068	62	44	80	Strng	Fair	18	20	**55**
51480	CLINTON WY	S 29TH AVE	S 30TH AVE	Local	Asphalt	33	232	43	893	55	48	80	Strng	Fair	6	39	**51.5**
51150	CLINTON WY	S 30TH AVE	S 31ST AVE	Local	Asphalt	32	291	52	1,086	50	37	80	Strng	Marginal	18	32	**45**
50910	CLINTON WY	S 32ND AVE	S 33RD AVE	Local	Asphalt	32	363	65	1,355	72	61	80	Strng	Good	0	28	**68**
51180	CLINTON WY	S 34TH AVE	DS@416W S 34TH AVE	Local	Asphalt	32	416	74	1,553	70	63	80	Strng	Good	0	30	**67**
51040	CLINTON WY	DS@416W S 34TH AVE	DS@680W S 34TH AVE	Local	Asphalt	31	264	45	955	71	58	80	Strng	Good	0	29	**66**
51100	CLINTON WY	DS@680W S 34TH AVE	CLINTON PL	Local	Asphalt	31	126	22	456	59	54	80	Strng	Fair	0	41	**56**
51110	CLINTON WY	CLINTON PL	S 37TH AVE	Local	Asphalt	31	253	44	915	61	41	80	Strng	Fair	0	39	**53**
51430	CLINTON WY	S 38TH AVE	S 39TH AVE	Local	Asphalt	32	221	39	825	52	55	80	Strng	Fair	7	40	**52**
51200	CLINTON WY	EAST END	S 48TH AVE	Local	Asphalt	36	349	71	1484	38	36	80	Strng	Poor	28	34	**36.6**
51120	CLINTON WY	EAST END	S 69TH AVE	Local	Asphalt	41	269	62	1296	65	59	80	Strng	Good	2	32	**62.2**
10090	CONESTOGA BLVD	N 46TH AVE	PHAETON PL	Local	Asphalt	33	407	75	1,567	95	84	60	Mod	Excellent	5	0	**90**
8880	CONESTOGA BLVD	PHAETON PL	SURREY LN	Local	Asphalt	30	430	72	1,505	100	90	60	Mod	Excellent	0	0	**96**
8030	CONESTOGA BLVD	SURREY LN	CARRIAGE HILL DR	Local	Asphalt	32	646	115	2,412	95	84	60	Mod	Excellent	5	0	**90**
6780	CONESTOGA BLVD	CARRIAGE HILL DR	FECHTER RD	Local	Asphalt	32	380	68	1,419	100	90	60	Mod	Excellent	0	0	**96**
10100	CONESTOGA BLVD	N 46TH AVE	DS@123W N 46TH AVE	Local	Asphalt	32	123	22	459	100	90	60	Mod	Excellent	0	0	**95.6**
10080	CONESTOGA BLVD	DS@123W N 46TH AVE	CARRIAGE HILL DR	Local	Asphalt	32	153	27	571	100	90	60	Mod	Excellent	0	0	**96**
10070	CONESTOGA BLVD	CARRIAGE HILL DR	N 48TH AVE	Local	Asphalt	32	307	55	1,146	95	84	60	Mod	Excellent	5	0	**91**
59160	CONOVER DR	ZIER RD	PERRY ST	Local	Asphalt	33	292	54	1,124	63	53	80	Strng	Fair	9	27	**59**
59530	CONOVER DR	PERRY ST	SPOKANE ST	Local	Asphalt	31	277	48	1,002	56	68	80	Strng	Good	8	35	**59**
59640	CONOVER DR	SPOKANE ST	SW END	Local	Asphalt	35	313	61	1286	57	54	80	Strng	Fair	14	29	**55.2**
54410	CONRAD AVE	NORTH END	W LOGAN AVE	Local	Asphalt	40	181	40	841	55	39	80	Strng	Marginal	17	28	**48.2**
55880	CONRAD AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	33	646	118	2,487	62	56	80	Strng	Fair	10	29	**59**
22330	COOK ST	EAST END	N 40TH AVE	Local	Asphalt	32	206	37	769	43	45	80	Strng	Marginal	22	35	**43**
75610	COOLIDGE RD	S 59TH AVE	S 60TH AVE	Local	Asphalt	32	416	74	1553	79	60	60	Mod	V Good	4	17	**72.1**
62360	COOLIDGE RD	EAST END	S 69TH AVE	Local	Asphalt	23	447	57	1199	82	63	60	Mod	V Good	11	7	**75.2**
62300	COOLIDGE RD	S 72ND AVE	DS@381W S 72ND AVE	Major Collector	Asphalt	40	381	85	1778	89	72	60	Mod	V Good	11	0	**82.7**
62310	COOLIDGE RD	DS@381W S 72ND AVE	DS@719W S 72ND AVE	Major Collector	Asphalt	40	338	75	1,577	99	90	60	Mod	Excellent	0	2	**95**
62290	COOLIDGE RD	DS@719W S 72ND AVE	S 76TH AVE	Major Collector	Asphalt	43	513	123	2,574	82	73	60	Mod	V Good	15	3	**79**
62230	COOLIDGE RD	S 76TH AVE	S 77TH AVE	Major Collector	Asphalt	41	150	34	718	64	63	80	Strng	Good	5	30	**63**
62240	COOLIDGE RD	S 77TH AVE	S 78TH AVE	Major Collector	Asphalt	33	401	74	1,544	78	69	60	Mod	V Good	1	21	**74**
62270	COOLIDGE RD	S 78TH AVE	DS@330W S 78TH AVE	Major Collector	Asphalt	25	330	46	963	57	64	60	Mod	Fair	18	25	**59**
62280	COOLIDGE RD	DS@330W S 78TH AVE	DS@614W S 78TH AVE	Major Collector	Asphalt	26	284	41	861	54	58	80	Strng	Fair	16	29	**54**
62260	COOLIDGE RD	DS@614W S 78TH AVE	S 80TH AVE	Major Collector	Asphalt	26	299	43	907	54	54	80	Strng	Fair	17	30	**52**
62250	COOLIDGE RD	S 80TH AVE	DS@701W S 80TH AVE	Truck Route	Asphalt	28	701	109	2,290	87	87	60	Mod	Excellent	0	13	**86**
62220	COOLIDGE RD	DS@701W S 80TH AVE	S 84TH AVE	Truck Route	Asphalt	28	626	97	2,045	94	97	60	Mod	Excellent	0	6	**94**
73230	COOLIDGE RD	S 84TH AVE	S 86TH AVE	Truck Route	Asphalt	28	797	124	2,604	95	87	60	Mod	Excellent	0	5	**91**
71950	COOLIDGE RD	S 86TH AVE	S 87TH AVE	Truck Route	Asphalt	39	216	47	983	95	84	60	Mod	Excellent	0	5	**90**
73130	COOLIDGE RD	S 87TH AVE	S 88TH AVE	Truck Route	Asphalt	38	316	67	1,401	96	87	60	Mod	Excellent	0	4	**92**
62350	COOLIDGE RD	S 88TH AVE	S 91ST AVE	Truck Route	Asphalt	33	565	104	2175	72	76	60	Mod	V Good	12	16	**72.3**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
70530	COOLIDGE RD	S 91ST AVE	S 94TH AVE	Truck Route	Asphalt	32	917	163	3,423	82	69	60	Mod	V Good	4	13	**77**
70540	COOLIDGE RD	S 94TH AVE	S 96TH AVE	Truck Route	Asphalt	32	1,218	217	4,547	93	79	60	Mod	Excellent	4	3	**87**
40800	CORNELL AVE	DIVISION ST	PEACH ST	Local	Asphalt	24	462	62	1,294	89	72	60	Mod	V Good	0	11	**83**
43460	CORNELL AVE	PEACH ST	SAINT HELENS ST	Local	Asphalt	24	532	71	1,490	75	63	60	Mod	V Good	12	13	**70**
45290	CORNELL AVE	SAINT HELENS ST	BAKER ST	Local	Asphalt	24	456	61	1,277	73	64	60	Mod	V Good	6	20	**69**
45710	CORNELL AVE	BAKER ST	BAKER ST	Local	Asphalt	24	192	26	538	75	64	60	Mod	V Good	9	16	**71**
46600	CORNELL AVE	BAKER ST	STEWART ST	Local	Asphalt	25	312	43	910	88	69	60	Mod	V Good	0	12	**81**
48760	CORNELL AVE	STEWART ST	W NOB HILL BLVD	Local	Asphalt	33	669	123	2,576	58	55	80	Strng	Fair	12	30	**56**
50580	CORNELL AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	33	670	123	2,580	65	38	80	Strng	Fair	16	18	**56**
52700	CORNELL AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	31	661	114	2,391	71	47	60	Mod	Good	13	16	**62**
54790	CORNELL AVE	W VIOLA AVE	W LOGAN AVE	Local	Asphalt	32	661	118	2,468	61	41	80	Strng	Fair	18	21	**54**
56090	CORNELL AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	33	652	120	2,510	74	53	80	Strng	Good	3	22	**66**
57290	CORNELL AVE	W MEAD AVE	DS@499S W MEAD AVE	Local	Asphalt	31	499	86	1,805	100	90	60	Mod	Excellent	0	0	**96**
57700	CORNELL AVE	DS@499S W MEAD AVE	W KING ST	Local	Asphalt	27	173	26	545	100	90	60	Mod	Excellent	0	0	**96**
58800	CORNELL AVE	W KING ST	W PIERCE ST	Local	Asphalt	35	648	126	2,646	100	90	60	Mod	Excellent	0	0	**96**
59140	CORNELL AVE	W PIERCE ST	DS@94S W PIERCE ST	Local	Asphalt	31	94	16	340	100	90	60	Mod	Excellent	0	0	**95.6**
59830	CORNELL AVE	DS@94S W PIERCE ST	DS@523S W PIERCE ST	Local	Asphalt	28	428	67	1398	100	90	60	Mod	Excellent	0	0	**95.6**
59990	CORNELL AVE	DS@523S W PIERCE ST	SPOKANE ST	Local	Asphalt	32	123	22	459	100	90	60	Mod	Excellent	0	0	**95.6**
60410	CORNELL AVE	SPOKANE ST	FREMONT ST	Local	Asphalt	35	406	79	1,658	100	90	60	Mod	Excellent	0	0	**96**
61040	CORNELL AVE	FREMONT ST	W WASHINGTON AVE	Local	Asphalt	33	272	50	1,047	100	90	60	Mod	Excellent	0	0	**96**
61530	CORPMAN LN	W WASHINGTON AVE	SOUTH END	Local	Asphalt	26	346	50	1,050	68	54	80	Strng	Good	4	6	**63**
27880	CORRIGAN WY	SHARON WY	SUMMITVIEW AVE	Local	Asphalt	23	350	45	939	47	34	80	Strng	Marginal	28	25	**42**
59590	COTTAGE WY	TERRY AVE	S 71ST AVE	Local	Asphalt	38	496	105	2,199	68	67	80	Strng	Good	0	32	**67**
49690	COWDEN PL	EAST END	S 48TH AVE	Local	Asphalt	36	333	66	1,393	74	53	80	Strng	Good	4	23	**66**
75620	CRESTFIELDS RD	S 59TH AVE	S 60TH AVE	Local	Asphalt	32	418	74	1,561	83	64	60	Mod	V Good	5	12	**76**
62770	CRESTFIELDS RD	S 60TH AVE	S 61ST AVE	Local	Asphalt	32	671	119	2,505	72	49	80	Strng	Good	8	20	**64**
62760	CRESTFIELDS RD	S 61ST AVE	S 64TH AVE	Local	Asphalt	33	780	143	3,003	55	71	80	Strng	Good	8	37	**59**
62780	CRESTFIELDS RD	S 64TH AVE	S 65TH AVE	Local	Asphalt	33	369	68	1421	61	44	80	Strng	Fair	11	28	**54.3**
62790	CRESTFIELDS RD	S 65TH AVE	S 67TH AVE	Local	Asphalt	32	466	83	1740	62	66	80	Strng	Good	9	29	**62.7**
62730	CRESTFIELDS RD	S 67TH AVE	S 68TH AVE	Local	Asphalt	32	360	64	1,344	73	56	80	Strng	Good	6	22	**66**
74850	CRESTFIELDS RD	S 75TH AVE	S 76TH AVE	Local	Asphalt	33	349	64	1344	82	64	60	Mod	V Good	0	18	**75.4**
75880	CRESTFIELDS RD	S 78TH AVE	DIAMOND WY	Local	Asphalt	30	251	42	879	83	65	60	Mod	V Good	0	17	**76**
75860	CRESTFIELDS RD	DIAMOND WY	S 79TH AVE	Local	Asphalt	30	250	42	875	80	71	60	Mod	V Good	3	17	**76**
75910	CRESTFIELDS RD	S 79TH AVE	RUBY WY	Local	Asphalt	30	238	40	833	88	69	60	Mod	V Good	4	8	**81**
71340	CROWN CREST AVE	S 75TH AVE	S 76TH AVE	Local	Asphalt	32	410	73	1,531	72	64	60	Mod	Good	7	21	**69**
72290	CROWN CREST WY	S 72ND AVE	S 73RD AVE	Local	Asphalt	32	346	62	1,292	90	91	60	Mod	Excellent	0	10	**90**
61460	CROWN CREST WY	S 73RD AVE	S 75TH AVE	Local	Asphalt	32	588	105	2,195	86	85	60	Mod	Excellent	5	9	**85**
20590	CUSTER AVE	W LINCOLN AVE	DS@159N W LINCOLN AVE	Local	Asphalt	32	159	28	594	75	54	60	Mod	Good	9	16	**67**
19350	CUSTER AVE	DS@159N W LINCOLN AVE	GARFIELD AVE	Local	Asphalt	32	164	29	612	81	63	80	Strng	V Good	0	19	**74**
18860	CUSTER AVE	GARFIELD AVE	DS@170N GARFIELD AVE	Local	Asphalt	32	170	30	635	76	60	60	Mod	V Good	7	16	**70**
17730	CUSTER AVE	DS@170N GARFIELD AVE	MCKINLEY AVE	Local	Asphalt	31	158	27	571	80	75	60	Mod	V Good	0	20	**77.5**
17200	CUSTER AVE	MCKINLEY AVE	DS@169N MCKINLEY AVE	Local	Asphalt	31	169	29	611	78	66	60	Mod	V Good	6	16	**73**
16430	CUSTER AVE	DS@169N MCKINLEY AVE	ROOSEVELT AVE	Local	Asphalt	31	163	28	590	84	77	60	Mod	V Good	1	14	**81.2**
15970	CUSTER AVE	ROOSEVELT AVE	DS@167N ROOSEVELT AVE	Local	Asphalt	32	167	30	623	100	90	60	Mod	Excellent	0	0	**96**
15010	CUSTER AVE	DS@167N ROOSEVELT AVE	CHERRY AVE	Local	Asphalt	31	169	29	611	86	67	60	Mod	V Good	1	14	**79**
14430	CUSTER AVE	CHERRY AVE	DS@165N CHERRY AVE	Local	Asphalt	32	165	29	616	79	70	60	Mod	V Good	0	21	**75.2**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
13470	CUSTER AVE	DS@165N CHERRY AVE	FAIRBANKS AVE	Local	Asphalt	33	166	30	639	78	58	60	Mod	V Good	7	16	**70**
12960	CUSTER AVE	FAIRBANKS AVE	DS@163N FAIRBANKS AVE	Local	Asphalt	32	163	29	609	76	56	80	Strng	Good	0	24	**68.7**
12450	CUSTER AVE	DS@163N FAIRBANKS AVE	JEROME AVE	Local	Asphalt	32	168	30	627	67	63	80	Strng	Good	1	32	**65**
26290	CUSTER AVE	SUMMITVIEW AVE	DS@162N SUMMITVIEW AVE	Local	Asphalt	23	162	21	435	51	39	80	Strng	Marginal	24	26	**46**
25170	CUSTER AVE	DS@162N SUMMITVIEW AVE	BROWNE AVE	Local	Asphalt	24	151	20	423	76	55	60	Mod	Good	8	17	**68**
24310	CUSTER AVE	BROWNE AVE	DS@173N BROWNE AVE	Local	Asphalt	24	173	23	484	52	51	60	Mod	Fair	29	19	**50.3**
23670	CUSTER AVE	DS@173N BROWNE AVE	FOLSOM AVE	Local	Asphalt	25	171	24	499	63	46	80	Strng	Fair	13	24	**56.3**
23020	CUSTER AVE	FOLSOM AVE	DS@158N FOLSOM AVE	Local	Asphalt	31	158	27	571	71	50	60	Mod	Good	12	17	**63**
22420	CUSTER AVE	DS@158N FOLSOM AVE	JEFFERSON AVE	Local	Asphalt	33	164	30	631	73	53	60	Mod	Good	13	15	**65**
21870	CUSTER AVE	JEFFERSON AVE	DS@165N JEFFERSON AVE	Local	Asphalt	34	165	31	655	93	81	60	Mod	Excellent	0	7	**88.4**
21150	CUSTER AVE	DS@165N JEFFERSON AVE	W LINCOLN AVE	Local	Asphalt	32	164	29	612	85	67	60	Mod	V Good	5	9	**78.3**
10850	D ST	N 8TH ST	DS@166E N 8TH ST	Local	Asphalt	32	166	30	620	87	68	60	Mod	V Good	0	13	**79.8**
10560	D ST	DS@166E N 8TH ST	DS@209E N 8TH ST	Local	Asphalt	31	43	7	156	100	90	60	Mod	Excellent	0	0	**95.6**
73240	D ST	DS@209E N 8TH ST	N 9TH ST	Local	Asphalt	31	145	25	524	81	76	60	Mod	V Good	4	15	**79**
10460	D ST	N 9TH ST	N 9TH ST	Local	Asphalt	31	48	8	174	76	63	80	Strng	V Good	3	21	**70.9**
10420	D ST	N 9TH ST	DS@148E N 9TH ST	Local	Asphalt	32	148	26	553	75	70	60	Mod	V Good	7	18	**72.5**
10250	D ST	DS@148E N 9TH ST	EAST END	Local	Asphalt	31	498	86	1801	86	69	60	Mod	V Good	5	9	**79.9**
11610	D ST	N 6TH ST	DS@202E N 6TH ST	Local	Asphalt	31	202	35	731	73	53	80	Strng	Good	7	20	**65.4**
11460	D ST	DS@202E N 6TH ST	N 7TH ST	Local	Asphalt	31	190	33	687	51	42	80	Strng	Marginal	19	30	**47**
11330	D ST	N 7TH ST	DS@208E N 7TH ST	Local	Asphalt	31	208	36	752	57	57	80	Strng	Fair	13	30	**56**
11030	D ST	DS@208E N 7TH ST	N 8TH ST	Local	Asphalt	31	193	33	698	73	52	80	Strng	Good	1	26	**65.7**
13720	D ST	N 1ST ST	DS@198E N 1ST ST	Local	Asphalt	40	198	44	924	69	49	80	Strng	Good	6	24	**61.7**
13590	D ST	DS@198E N 1ST ST	N 2ND ST	Local	Asphalt	41	197	45	942	72	50	80	Strng	Good	4	24	**64.2**
13260	D ST	N 2ND ST	DS@203E N 2ND ST	Local	Asphalt	40	203	45	947	72	56	80	Strng	Good	0	28	**65.7**
13160	D ST	DS@203E N 2ND ST	N 3RD ST	Local	Asphalt	40	201	45	938	72	50	80	Strng	Good	0	28	**64**
13010	D ST	N 3RD ST	DS@191E N 3RD ST	Local	Asphalt	32	191	34	713	87	68	60	Mod	V Good	0	13	**79.9**
12700	D ST	DS@191E N 3RD ST	N 4TH ST	Local	Asphalt	32	209	37	780	86	67	60	Mod	V Good	0	14	**78.8**
12520	D ST	N 4TH ST	DS@194E N 4TH ST	Local	Asphalt	32	194	34	724	76	56	60	Mod	Good	6	18	**68**
12400	D ST	DS@194E N 4TH ST	N NACHES AVE	Local	Asphalt	32	224	40	836	48	53	80	Strng	Marginal	12	31	**48.8**
12260	D ST	N NACHES AVE	DS@219E N NACHES AVE	Local	Asphalt	31	219	38	792	65	50	80	Strng	Good	11	23	**59**
12000	D ST	DS@219E N NACHES AVE	N 6TH ST	Local	Asphalt	31	199	34	720	87	68	60	Mod	V Good	0	13	**80**
14700	D ST	N FRONT ST	DS@190E N FRONT ST	Local	Asphalt	40	190	42	887	88	72	60	Mod	V Good	0	12	**81.9**
14250	D ST	DS@190E N FRONT ST	N 1ST ST	Local	Asphalt	40	202	45	943	79	59	80	Strng	V Good	0	21	**72**
14810	D ST	N FRONT ST	DS@210W N FRONT ST	Local	Asphalt	25	210	29	613	68	44	80	Strng	Good	13	19	**59**
15210	D ST	DS@210W N FRONT ST	N 1ST AVE	Local	Asphalt	28	329	51	1,075	94	84	60	Mod	Excellent	0	6	**90**
16040	D ST	N 1ST AVE	DS@396W N 1ST AVE	Local	Asphalt	47	396	103	2171	94	84	60	Mod	Excellent	0	6	**89.7**
16350	D ST	DS@396W N 1ST AVE	N 3RD AVE	Local	Asphalt	41	400	91	1913	92	95	60	Mod	Excellent	0	8	**92**
16670	D ST	N 3RD AVE	DS@198W N 3RD AVE	Local	Asphalt	50	198	55	1155	85	95	60	Mod	Excellent	3	12	**87.3**
16820	D ST	DS@198W N 3RD AVE	N 4TH AVE	Local	Asphalt	46	196	50	1052	89	100	60	Mod	Excellent	0	11	**91.6**
17140	D ST	N 4TH AVE	DS@201W N 4TH AVE	Local	Asphalt	48	201	54	1126	89	89	60	Mod	Excellent	0	11	**88.4**
17500	D ST	DS@201W N 4TH AVE	N 5TH AVE	Local	Asphalt	39	205	44	933	85	71	60	Mod	V Good	0	15	**79.4**
17690	D ST	N 5TH AVE	DS@196W N 5TH AVE	Local	Asphalt	37	196	40	846	62	46	80	Strng	Fair	10	28	**55.5**
17900	D ST	DS@196W N 5TH AVE	N 6TH AVE	Local	Asphalt	36	207	41	869	65	61	80	Strng	Good	5	30	**63**
18050	D ST	N 6TH AVE	PIERCE AVE	Local	Asphalt	38	91	19	403	64	36	80	Strng	Fair	3	33	**54**
47620	DALTON LN	WEST END	DS@332E WEST END	Local	Asphalt	32	332	59	1,239	76	66	60	Mod	V Good	7	17	**72**
47610	DALTON LN	DS@332E WEST END	S 18TH ST	Local	Asphalt	27	325	49	1,024	59	40	80	Strng	Fair	13	28	**52**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
35690	DELMAR TER	NORTH END	W WALNUT ST	Local	Asphalt	19	210	22	466	74	53	80	Strng	Good	0	26	**67**
37270	DELMAR TER	W WALNUT ST	SOUTH END	Local	Asphalt	22	377	46	968	46	27	80	Strng	Poor	25	28	**39**
75870	DIAMOND WY	CRESTFIELDS RD	LYONS LN	Local	Asphalt	31	390	67	1,411	91	73	60	Mod	Excellent	0	9	**84**
38960	DIVISION ST	S 2ND AVE	S 3RD AVE	Local	Asphalt	39	333	72	1,515	56	36	80	Strng	Marginal	15	29	**48**
39290	DIVISION ST	S 3RD AVE	S 4TH AVE	Minor Arterial	Asphalt	50	212	59	1,237	55	30	80	Strng	Marginal	15	30	**45**
39310	DIVISION ST	S 4TH AVE	S 5TH AVE	Minor Arterial	Asphalt	50	443	123	2,584	40	49	80	Strng	Marginal	32	28	**41**
70230	DIVISION ST	S 5TH AVE	QUEEN ANNE BLVD	Local	Asphalt	35	186	36	760	61	36	80	Strng	Fair	16	23	**52**
70250	DIVISION ST	QUEEN ANNE BLVD	S 6TH AVE	Local	Asphalt	32	199	35	743	69	47	80	Strng	Good	5	26	**61**
70240	DIVISION ST	S 6TH AVE	DS@117W S 6TH AVE	Local	Asphalt	20	117	13	273	47	39	80	Strng	Marginal	24	29	**43.2**
39350	DIVISION ST	DS@117W S 6TH AVE	CORNELL AVE	Local	Asphalt	25	157	22	458	74	53	80	Strng	Good	6	20	**66**
39430	DIVISION ST	CORNELL AVE	S 7TH AVE	Local	Asphalt	31	149	26	539	93	80	60	Mod	Excellent	0	7	**88**
75810	DIVISION ST	S 7TH AVE	S 7TH AVE	Local	Asphalt	31	37	6	134	81	62	60	Mod	V Good	5	15	**74**
39460	DIVISION ST	S 7TH AVE	DS@161W S 7TH AVE	Local	Asphalt	32	161	29	601	82	64	60	Mod	V Good	0	18	**75**
39470	DIVISION ST	DS@161W S 7TH AVE	S 8TH AVE	Local	Asphalt	33	215	39	828	76	56	80	Strng	Good	0	24	**69**
5390	DONALD DR	EAST END	DS@315W EAST END	Local	Asphalt	37	315	64	1,345	56	43	80	Strng	Fair	10	34	**51**
5410	DONALD DR	DS@315W EAST END	FELLOWS DR	Local	Asphalt	32	154	27	575	62	44	80	Strng	Fair	1	36	**55**
15380	DOUGLAS CT	N 66TH AVE	WEST END	Local	Asphalt	26	321	46	974	59	36	80	Strng	Fair	8	32	**50.6**
16980	DOUGLAS DR	N 42ND AVE	DS@336W N 42ND AVE	Local	Asphalt	32	336	60	1254	68	54	80	Strng	Good	4	27	**62.5**
16960	DOUGLAS DR	DS@336W N 42ND AVE	N 44TH AVE	Local	Asphalt	32	322	57	1202	59	53	60	Mod	Fair	21	21	**55.8**
16950	DOUGLAS DR	N 44TH AVE	N 45TH AVE	Local	Asphalt	31	500	86	1,808	23	29	60	Mod	Poor	51	26	**24**
16940	DOUGLAS DR	N 45TH AVE	N 46TH AVE	Local	Asphalt	32	157	28	586	25	25	80	Strng	V Poor	42	34	**23.8**
16910	DOUGLAS DR	N 46TH AVE	DOUGLAS DR (CDS)	Local	Asphalt	31	377	65	1363	34	43	80	Strng	Poor	32	34	**35.7**
16270	DOUGLAS DR	DOUGLAS DR (CDS)	DS@275W DOUGLAS DR (CDS)	Local	Asphalt	32	275	49	1027	53	41	80	Strng	Marginal	20	27	**47.9**
15800	DOUGLAS DR	DS@275W DOUGLAS DR (CDS)	N 49TH AVE	Local	Asphalt	32	347	62	1,295	48	47	80	Strng	Marginal	23	29	**46**
15680	DOUGLAS DR	N 49TH AVE	DS@314W N 49TH AVE	Local	Asphalt	32	314	56	1172	71	50	80	Strng	Good	9	20	**63.2**
15640	DOUGLAS DR	DS@314W N 49TH AVE	DS@609W N 49TH AVE	Local	Asphalt	32	295	52	1,101	55	49	60	Mod	Fair	25	20	**52**
15610	DOUGLAS DR	DS@609W N 49TH AVE	N 52ND AVE	Local	Asphalt	31	380	65	1374	38	39	80	Strng	Poor	29	33	**37.2**
15590	DOUGLAS DR	N 52ND AVE	DS@331W N 52ND AVE	Local	Asphalt	31	331	57	1197	57	42	80	Strng	Fair	14	29	**50.9**
15530	DOUGLAS DR	DS@331W N 52ND AVE	DS@759W N 52ND AVE	Local	Asphalt	31	428	74	1548	64	54	80	Strng	Good	7	28	**59.9**
15370	DOUGLAS DR	DS@759W N 52ND AVE	DS@1176W N 52ND AVE	Local	Asphalt	31	418	72	1512	35	43	80	Strng	Poor	37	27	**36.9**
15270	DOUGLAS DR	DS@1176W N 52ND AVE	N 56TH AVE	Local	Asphalt	31	291	50	1,052	60	46	80	Strng	Fair	13	28	**54**
15050	DOUGLAS DR	N 57TH AVE	N 58TH AVE	Local	Asphalt	32	335	60	1,251	58	35	80	Strng	Fair	18	24	**49**
14940	DOUGLAS DR	N 58TH AVE	DS@376W N 58TH AVE	Local	Asphalt	32	376	67	1404	54	48	80	Strng	Fair	9	37	**50.9**
14860	DOUGLAS DR	DS@376W N 58TH AVE	DS@734W N 58TH AVE	Local	Asphalt	32	358	64	1,337	64	51	80	Strng	Fair	14	23	**58**
14870	DOUGLAS DR	DS@734W N 58TH AVE	N 61ST AVE	Local	Asphalt	32	476	85	1,777	62	60	80	Strng	Good	13	25	**61**
15750	DOUGLAS DR	N 61ST AVE	N 62ND AVE	Local	Asphalt	33	330	61	1,271	71	48	80	Strng	Good	6	23	**62**
15700	DOUGLAS DR	N 62ND AVE	N 63RD AVE	Local	Asphalt	32	338	60	1,262	66	40	80	Strng	Fair	8	26	**56**
14670	DOUGLAS DR	N 77TH AVE	N 78TH AVE	Local	Asphalt	32	354	63	1,322	56	57	80	Strng	Fair	10	34	**55**
16260	DOUGLAS DR (CDS)	DOUGLAS DR	NE END	Local	Asphalt	37	230	48	1006	61	40	80	Strng	Fair	17	22	**52.9**
34370	DRAKE DR	EAST END	S 45TH AVE	Local	Asphalt	38	231	49	1,037	57	35	80	Strng	Marginal	12	31	**49**
42170	DUNDEE CT	S 68TH AVE	WEST END	Local	Asphalt	46	144	37	774	46	35	80	Strng	Marginal	23	31	**41.4**
9310	E ST	N 8TH ST	EAST END	Local	Asphalt	40	176	39	821	39	44	80	Strng	Marginal	28	33	**40**
10210	E ST	N 6TH ST	DS@201E N 6TH ST	Local	Asphalt	32	201	36	750	54	54	80	Strng	Fair	4	42	**52.9**
10110	E ST	DS@201E N 6TH ST	N 7TH ST	Local	Asphalt	32	190	34	709	71	49	80	Strng	Good	0	29	**63**
10020	E ST	N 7TH ST	DS@208E N 7TH ST	Local	Asphalt	31	208	36	752	77	59	80	Strng	V Good	0	23	**70**
9470	E ST	DS@208E N 7TH ST	N 8TH ST	Local	Asphalt	31	200	34	723	72	57	80	Strng	Good	6	22	**66**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
12380	E ST	N 1ST ST	DS@199E N 1ST ST	Local	Asphalt	40	199	44	929	67	48	80	Strng	Good	8	25	**60**
12240	E ST	DS@199E N 1ST ST	N 2ND ST	Local	Asphalt	40	198	44	924	85	67	60	Mod	V Good	0	15	**78**
12020	E ST	N 2ND ST	DS@204E N 2ND ST	Local	Asphalt	40	204	45	952	71	49	80	Strng	Good	9	19	**63**
11600	E ST	DS@204E N 2ND ST	N 3RD ST	Local	Asphalt	40	198	44	924	78	58	60	Mod	V Good	4	18	**70**
11440	E ST	N 3RD ST	DS@199E N 3RD ST	Local	Asphalt	40	199	44	929	84	66	60	Mod	V Good	10	6	**77**
11320	E ST	DS@199E N 3RD ST	N 4TH ST	Local	Asphalt	40	204	45	952	89	70	60	Mod	V Good	0	11	**82**
11040	E ST	N 4TH ST	DS@196E N 4TH ST	Local	Asphalt	31	196	34	709	81	67	60	Mod	V Good	3	16	**75**
10890	E ST	DS@196E N 4TH ST	N NACHES AVE	Local	Asphalt	31	222	38	803	77	57	60	Mod	V Good	10	14	**69**
10530	E ST	N NACHES AVE	DS@221E N NACHES AVE	Local	Asphalt	31	221	38	799	82	63	60	Mod	V Good	6	13	**74.6**
10350	E ST	DS@221E N NACHES AVE	N 6TH ST	Local	Asphalt	31	198	34	716	86	67	60	Mod	V Good	0	14	**79.3**
12620	E ST	N FRONT ST	DS@190E N FRONT ST	Local	Asphalt	40	190	42	887	54	33	80	Strng	Marginal	21	25	**45.8**
12510	E ST	DS@190E N FRONT ST	N 1ST ST	Local	Asphalt	40	201	45	938	60	30	80	Strng	Marginal	15	25	**48.8**
76340	EASY ST	EAST END	WEST END	Other	Asphalt	33	1030	190	3983	95	84	60	Mod	Excellent	0	6	**90.1**
62900	EASY ST	S 68TH AVE	S 69TH AVE	Local	Asphalt	33	726	133	2795	79	60	60	Mod	V Good	3	18	**71.5**
62890	EASY ST	S 69TH AVE	S 70TH AVE	Local	Asphalt	28	597	93	1950	66	67	80	Strng	Good	5	29	**65.4**
63180	EASY ST	S 77TH AVE	S 78TH AVE	Local	Asphalt	32	315	56	1176	72	71	80	Strng	V Good	2	25	**71.3**
63190	EASY ST	EAST END	S 80TH AVE	Local	Asphalt	39	537	116	2442	66	43	80	Strng	Fair	10	24	**57.4**
28110	ELEANOR ST	N 18TH AVE	PARK AVE	Local	Asphalt	23	308	39	826	70	47	80	Strng	Good	11	19	**61.4**
28070	ELEANOR ST	N 22ND AVE	N 23RD AVE	Local	Asphalt	24	332	44	930	87	68	60	Mod	V Good	0	13	**80**
27990	ELEANOR ST	N 23RD AVE	N 24TH AVE	Local	Asphalt	24	330	44	924	93	81	60	Mod	Excellent	0	7	**88.6**
14360	ENGLEWOOD AVE	N 16TH AVE	DS@388W N 16TH AVE	Major Collector	Asphalt	36	388	78	1630	78	58	80	Strng	V Good	3	19	**70.2**
14370	ENGLEWOOD AVE	DS@388W N 16TH AVE	N 18TH AVE	Major Collector	Asphalt	39	282	61	1283	81	62	60	Mod	V Good	7	11	**74.2**
14450	ENGLEWOOD AVE	N 18TH AVE	DS@329W N 18TH AVE	Major Collector	Asphalt	26	329	48	998	75	66	60	Mod	V Good	13	12	**71.1**
14460	ENGLEWOOD AVE	DS@329W N 18TH AVE	N 20TH AVE	Major Collector	Asphalt	23	330	42	886	74	58	60	Mod	Good	9	17	**67.6**
14480	ENGLEWOOD AVE	N 20TH AVE	N 21ST AVE	Major Collector	Asphalt	36	331	66	1390	78	59	60	Mod	V Good	6	16	**70.9**
14290	ENGLEWOOD AVE	N 21ST AVE	N 22ND AVE	Major Collector	Asphalt	23	337	43	904	100	90	60	Mod	Excellent	0	0	**95.6**
14300	ENGLEWOOD AVE	N 22ND AVE	DS@142W N 22ND AVE	Major Collector	Asphalt	32	142	25	530	76	58	60	Mod	Good	10	14	**68.9**
14310	ENGLEWOOD AVE	DS@142W N 22ND AVE	N 23RD AVE	Major Collector	Asphalt	31	180	31	651	78	59	60	Mod	V Good	6	16	**70.6**
14320	ENGLEWOOD AVE	N 23RD AVE	N 24TH AVE	Major Collector	Asphalt	32	330	59	1232	80	61	60	Mod	V Good	8	12	**72.9**
14280	ENGLEWOOD AVE	N 24TH AVE	DS@207W N 24TH AVE	Major Collector	Asphalt	32	207	37	773	70	47	60	Mod	Good	16	14	**61.2**
14260	ENGLEWOOD AVE	DS@207W N 24TH AVE	N 25TH AVE	Major Collector	Asphalt	36	122	24	512	65	37	60	Mod	Fair	21	14	**54.1**
14240	ENGLEWOOD AVE	N 25TH AVE	N 25TH AVE	Major Collector	Asphalt	36	87	17	365	75	55	60	Mod	Good	13	12	**67.3**
14270	ENGLEWOOD AVE	N 25TH AVE	N 26TH AVE	Major Collector	Asphalt	33	256	47	986	66	47	80	Strng	Fair	14	20	**58**
14220	ENGLEWOOD AVE	N 26TH AVE	N 27TH AVE	Major Collector	Asphalt	32	316	56	1,180	70	50	80	Strng	Good	10	20	**62**
14200	ENGLEWOOD AVE	N 27TH AVE	SUPERIOR LN	Major Collector	Asphalt	32	200	36	747	72	50	60	Mod	Good	11	16	**63.7**
72700	ENGLEWOOD AVE	SUPERIOR LN	POWERHOUSE RD	Major Collector	Asphalt	36	498	100	2,092	66	41	60	Mod	Fair	19	15	**56**
72690	ENGLEWOOD AVE	POWERHOUSE RD	DS@700W POWERHOUSE RD	Major Collector	Asphalt	35	700	136	2,858	62	46	80	Strng	Fair	13	25	**55**
14080	ENGLEWOOD AVE	DS@700W POWERHOUSE RD	N 32ND AVE	Major Collector	Asphalt	29	250	40	846	50	58	60	Mod	Fair	30	20	**52**
14090	ENGLEWOOD AVE	N 32ND AVE	DS@321W N 32ND AVE	Major Collector	Asphalt	37	321	66	1,386	53	63	60	Mod	Fair	19	27	**56**
14120	ENGLEWOOD AVE	DS@321W N 32ND AVE	N 34TH AVE	Major Collector	Asphalt	38	336	71	1490	67	75	60	Mod	Good	17	16	**68.7**
14160	ENGLEWOOD AVE	N 34TH AVE	N 34TH AVE	Local	Asphalt	38	42	9	186	72	57	80	Strng	Good	0	28	**66**
14170	ENGLEWOOD AVE	N 34TH AVE	N 35TH AVE	Major Collector	Asphalt	24	343	46	960	51	73	60	Mod	Fair	22	27	**57**
14140	ENGLEWOOD AVE	N 35TH AVE	DS@467W N 35TH AVE	Major Collector	Asphalt	37	467	96	2,016	44	75	60	Mod	Fair	28	29	**53**
14150	ENGLEWOOD AVE	DS@467W N 35TH AVE	N 37TH AVE	Major Collector	Asphalt	52	183	53	1,110	49	82	60	Mod	Fair	27	24	**59**
14110	ENGLEWOOD AVE	N 37TH AVE	N 39TH AVE	Major Collector	Asphalt	44	478	117	2,454	52	77	60	Mod	Good	30	18	**59**
14070	ENGLEWOOD AVE	N 39TH AVE	N 40TH AVE	Major Collector	Asphalt	47	447	117	2,451	79	74	60	Mod	V Good	7	14	**77**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
14050	ENGLEWOOD AVE	N 40TH AVE	DS@322W N 40TH AVE	Major Collector	Asphalt	44	322	79	1,653	53	45	60	Mod	Fair	32	16	**49**
14030	ENGLEWOOD AVE	DS@322W N 40TH AVE	N 42ND AVE	Major Collector	Asphalt	29	529	85	1,790	23	57	60	Mod	Poor	47	30	**33**
14010	ENGLEWOOD AVE	N 42ND AVE	DS@98W N 42ND AVE	Major Collector	Asphalt	38	98	21	434	48	65	60	Mod	Fair	33	18	**53**
14020	ENGLEWOOD AVE	DS@98W N 42ND AVE	N 44TH AVE	Major Collector	Asphalt	38	392	83	1,738	21	63	60	Mod	Poor	51	28	**34**
13970	ENGLEWOOD AVE	N 44TH AVE	BELLEVUE PL	Major Collector	Asphalt	23	271	35	727	75	74	60	Mod	V Good	15	11	**74**
13990	ENGLEWOOD AVE	BELLEVUE PL	N 45TH AVE	Major Collector	Asphalt	23	230	29	617	68	77	60	Mod	V Good	20	11	**70**
13950	ENGLEWOOD AVE	N 45TH AVE	N 46TH AVE	Major Collector	Asphalt	22	217	27	557	53	55	60	Mod	Fair	37	11	**52**
13940	ENGLEWOOD AVE	N 46TH AVE	N 47TH AVE	Major Collector	Asphalt	36	292	58	1,226	62	65	60	Mod	Good	27	11	**62**
13920	ENGLEWOOD AVE	N 47TH AVE	N 48TH AVE	Major Collector	Asphalt	21	304	35	745	65	76	60	Mod	Good	21	13	**67.8**
13890	ENGLEWOOD AVE	N 48TH AVE	N 49TH AVE	Major Collector	Asphalt	33	226	41	870	80	61	60	Mod	V Good	13	7	**73**
13860	ENGLEWOOD AVE	N 49TH AVE	N 49TH AVE	Major Collector	Asphalt	39	90	20	410	91	71	60	Mod	V Good	4	5	**84**
13850	ENGLEWOOD AVE	N 49TH AVE	N 50TH AVE	Major Collector	Asphalt	39	309	67	1,406	93	80	60	Mod	Excellent	5	2	**88**
13820	ENGLEWOOD AVE	N 50TH AVE	N 51ST AVE	Major Collector	Asphalt	30	299	50	1,047	34	66	60	Mod	Marginal	41	25	**43**
13770	ENGLEWOOD AVE	N 51ST AVE	N 52ND AVE	Major Collector	Asphalt	27	299	45	942	23	55	60	Mod	Poor	42	35	**33**
13750	ENGLEWOOD AVE	N 52ND AVE	N 53RD AVE	Major Collector	Asphalt	31	305	53	1,103	18	57	60	Mod	Poor	46	36	**30**
13710	ENGLEWOOD AVE	N 53RD AVE	N 54TH AVE	Major Collector	Asphalt	31	466	80	1,685	23	41	60	Mod	Poor	48	29	**28**
13690	ENGLEWOOD AVE	N 54TH AVE	N 55TH AVE	Major Collector	Asphalt	31	420	72	1,519	19	58	60	Mod	Poor	47	33	**31**
13680	ENGLEWOOD AVE	N 55TH AVE	N 56TH AVE	Major Collector	Asphalt	31	307	53	1,110	35	52	60	Mod	Marginal	41	24	**40**
13670	ENGLEWOOD AVE	N 56TH AVE	N 58TH AVE	Other	Asphalt	29	421	68	1424	33	73	60	Mod	Marginal	33	35	**44.7**
13640	ENGLEWOOD AVE	N 58TH AVE	N 58TH AVE	Other	Asphalt	31	217	37	785	41	60	60	Mod	Marginal	32	27	**46.1**
13620	ENGLEWOOD AVE	N 58TH AVE	DS@838W N 58TH AVE	Other	Asphalt	25	838	116	2444	40	73	60	Mod	Fair	37	23	**49.4**
13580	ENGLEWOOD AVE	DS@838W N 58TH AVE	DS@1111W N 58TH AVE	Other	Asphalt	27	273	41	860	34	71	60	Mod	Marginal	44	21	**45**
13570	ENGLEWOOD AVE	DS@1111W N 58TH AVE	N 62ND AVE	Other	Asphalt	24	411	55	1151	40	89	60	Mod	Fair	33	27	**55.5**
13560	ENGLEWOOD AVE	N 62ND AVE	DS@329W N 62ND AVE	Other	Asphalt	23	329	42	883	59	80	60	Mod	Good	15	26	**65.2**
13550	ENGLEWOOD AVE	DS@329W N 62ND AVE	DS@520W N 62ND AVE	Other	Asphalt	25	191	27	557	71	70	60	Mod	V Good	11	18	**70**
13540	ENGLEWOOD AVE	DS@520W N 62ND AVE	N 65TH AVE	Other	Asphalt	25	327	45	954	54	85	60	Mod	Good	24	22	**63**
13520	ENGLEWOOD AVE	N 65TH AVE	N 66TH AVE	Other	Asphalt	24	321	43	899	60	53	60	Mod	Fair	19	21	**57**
13490	ENGLEWOOD AVE	N 66TH AVE	N 68TH AVE	Other	Asphalt	24	642	86	1798	37	50	80	Strng	Marginal	24	39	**40.5**
13410	ENGLEWOOD AVE	N 68TH AVE	ENGLEWOOD TERRACE	Other	Asphalt	25	188	26	548	37	57	80	Strng	Marginal	23	40	**43**
13390	ENGLEWOOD AVE	ENGLEWOOD TERRACE	SNOW MASS LN	Other	Asphalt	24	802	107	2246	31	51	80	Strng	Poor	30	38	**36.9**
13370	ENGLEWOOD AVE	SNOW MASS LN	N 72ND AVE	Local	Asphalt	32	276	49	1030	36	67	60	Mod	Marginal	35	29	**45.3**
13360	ENGLEWOOD AVE	N 72ND AVE	N 74TH AVE	Local	Asphalt	38	706	149	3130	60	69	60	Mod	Good	13	27	**62**
13340	ENGLEWOOD AVE	N 74TH AVE	N 77TH AVE	Local	Asphalt	40	801	178	3738	39	63	80	Strng	Marginal	26	35	**46.1**
13320	ENGLEWOOD AVE	N 77TH AVE	ENGLEWOOD CREST DR	Local	Asphalt	26	450	65	1,365	45	72	60	Mod	Fair	23	32	**53**
13310	ENGLEWOOD AVE	ENGLEWOOD CREST DR	N 78TH AVE	Local	Asphalt	26	49	7	149	51	59	80	Strng	Fair	13	36	**53**
13300	ENGLEWOOD AVE	N 78TH AVE	N 80TH AVE	Local	Asphalt	26	667	96	2023	51	57	80	Strng	Fair	15	33	**52.3**
15870	ENGLEWOOD CREST DR	ENGLEWOOD AVE	ENGLEWOOD PL	Local	Asphalt	32	702	125	2,621	38	51	80	Strng	Marginal	26	37	**41**
16640	ENGLEWOOD CREST DR	ENGLEWOOD PL	N 80TH AVE	Local	Asphalt	32	332	59	1239	48	77	80	Strng	Fair	14	38	**56.9**
16860	ENGLEWOOD CREST DR	N 80TH AVE	VIEWCREST PL	Local	Asphalt	32	150	27	560	44	73	80	Strng	Fair	16	40	**52**
16380	ENGLEWOOD CREST DR	ENGLEWOOD PL	BLUE HILLS PL	Local	Asphalt	31	156	27	564	55	23	80	Strng	Marginal	15	30	**43**
18110	ENGLEWOOD CREST DR	BLUE HILLS PL	SUNSET AVE	Local	Asphalt	29	521	84	1,763	91	72	60	Mod	V Good	0	9	**84**
69980	ENGLEWOOD CREST DR	SUNSET AVE	N 80TH AVE	Local	Asphalt	29	889	143	3,008	89	70	60	Mod	V Good	0	11	**82**
19110	ENGLEWOOD CREST DR	N 80TH AVE	ENGLEWOOD CREST CT	Local	Asphalt	24	97	13	272	85	66	60	Mod	V Good	0	15	**78**
19100	ENGLEWOOD CREST DR	ENGLEWOOD CREST CT	VIEWCREST PL	Local	Asphalt	22	537	66	1,378	62	59	80	Strng	Good	13	26	**60**
12660	ENGLEWOOD HILL DR	EAST END	N 54TH AVE	Local	Asphalt	38	225	48	1,004	60	30	80	Strng	Fair	10	30	**49**
12670	ENGLEWOOD HILL DR	N 54TH AVE	DS@130W N 54TH AVE	Local	Asphalt	32	130	23	485	64	51	80	Strng	Fair	1	34	**59**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
72560	ENGLEWOOD HILL DR	DS@130W N 54TH AVE	N 55TH AVE	Local	Asphalt	32	303	54	1131	34	49	80	Strng	Poor	35	31	**37.8**
72550	ENGLEWOOD HILL DR	N 55TH AVE	N 56TH AVE	Local	Asphalt	32	313	56	1169	59	41	80	Strng	Fair	16	25	**51.8**
12650	ENGLEWOOD HILL PL	EAST END	N 58TH AVE	Local	Asphalt	37	215	45	937	44	31	80	Strng	Poor	24	32	**38.7**
12760	ENGLEWOOD HILL PL	N 72ND AVE	SW END	Local	Asphalt	41	428	98	2049	56	51	80	Strng	Fair	12	31	**53.5**
15880	ENGLEWOOD PL	ENGLEWOOD CREST DR	NORTH END	Local	Asphalt	31	254	43	913	69	45	80	Strng	Good	11	20	**60.4**
14180	ENGLEWOOD TERRACE	ENGLEWOOD AVE	SW END	Local	Asphalt	34	859	163	3,413	66	39	80	Strng	Fair	11	24	**56**
3940	ERICKSON LN	N 4TH ST	DS@378E N 4TH ST	Local	Asphalt	18	378	38	794	83	67	60	Mod	V Good	5	12	**77**
3980	ERICKSON LN	DS@378E N 4TH ST	EAST END	Local	Asphalt	17	218	21	432	89	76	60	Mod	V Good	0	11	**83.7**
12610	ESTEE CT	ESTEE CT	N 42ND AVE	Local	Asphalt	32	451	80	1,684	100	90	60	Mod	Excellent	0	0	**96**
12730	ESTEE CT	ESTEE CT	N 42ND AVE	Local	Asphalt	32	325	58	1213	100	90	60	Mod	Excellent	0	0	**95.6**
8190	F ST	N 8TH ST	EAST END	Local	Asphalt	32	187	33	698	51	39	80	Strng	Marginal	1	48	**46.1**
8790	F ST	N 6TH ST	DS@198E N 6TH ST	Local	Asphalt	32	198	35	739	84	66	60	Mod	V Good	0	16	**77.5**
8580	F ST	DS@198E N 6TH ST	N 7TH ST	Local	Asphalt	32	191	34	713	64	50	80	Strng	Fair	9	27	**59**
8500	F ST	N 7TH ST	DS@211E N 7TH ST	Local	Asphalt	32	211	38	788	59	57	80	Strng	Fair	14	27	**57**
8310	F ST	DS@211E N 7TH ST	N 8TH ST	Local	Asphalt	32	199	35	743	64	38	80	Strng	Fair	19	17	**55**
9450	F ST	N 4TH ST	DS@197E N 4TH ST	Local	Asphalt	32	197	35	735	62	51	60	Mod	Fair	18	20	**57.1**
9330	F ST	DS@197E N 4TH ST	N NACHES AVE	Local	Asphalt	32	222	39	829	69	45	60	Mod	Good	14	17	**60**
9020	F ST	N NACHES AVE	DS@219E N NACHES AVE	Local	Asphalt	31	219	38	792	74	53	80	Strng	Good	6	20	**66**
8900	F ST	DS@219E N NACHES AVE	N 6TH ST	Local	Asphalt	31	199	34	720	72	50	80	Strng	Good	2	26	**64**
10780	F ST	N 1ST ST	DS@198E N 1ST ST	Local	Asphalt	40	198	44	924	71	48	80	Strng	Good	8	21	**63**
10500	F ST	DS@198E N 1ST ST	N 2ND ST	Local	Asphalt	39	199	43	905	54	43	80	Strng	Fair	9	37	**49**
10360	F ST	N 2ND ST	DS@202E N 2ND ST	Local	Asphalt	40	202	45	943	78	59	60	Mod	V Good	6	15	**71**
10200	F ST	DS@202E N 2ND ST	N 3RD ST	Local	Asphalt	40	200	44	933	60	27	80	Strng	Marginal	22	18	**47.6**
10120	F ST	N 3RD ST	EAST END	Local	Asphalt	40	198	44	924	81	62	60	Mod	V Good	3	16	**73.7**
11230	F ST	N FRONT ST	DS@191E N FRONT ST	Local	Asphalt	39	191	41	869	46	47	80	Strng	Marginal	20	35	**45.3**
11010	F ST	DS@191E N FRONT ST	N 1ST ST	Local	Asphalt	39	202	44	919	51	29	80	Strng	Marginal	9	39	**42.9**
69870	FAIR AV LP	E YAKIMA AVE	S FAIR AVE	Minor Arterial	Asphalt	50	517	144	3,016	82	63	60	Mod	V Good	3	15	**75**
69920	FAIR AVE	E YAKIMA AVE	I 82 RAMP EB	Truck Route	Asphalt	35	1,438	280	5,872	62	74	60	Mod	Good	25	13	**65**
69820	FAIR AVE	I 82 RAMP EB	E MARTIN LUTHER KING JR BLVD	Truck Route	Asphalt	41	722	164	3,454	75	82	60	Mod	V Good	11	13	**77**
69790	FAIR AVE	E MARTIN LUTHER KING JR BLVD	N 10TH ST	Truck Route	Concrete	30	365	61	1,278	100	90	60	Mod	Excellent	0	0	**96**
69850	FAIR AVE	E YAKIMA AVE	I 82 RAMP EB	Minor Arterial	Asphalt	37	219	45	945	59	74	60	Mod	Good	23	19	**62.5**
19070	FAIR AVE	I 82 RAMP EB	FAIR AV LP	Minor Arterial	Asphalt	34	168	32	666	64	68	60	Mod	Good	18	18	**64.2**
19770	FAIR AVE	FAIR AV LP	E CHESTNUT AVE	Minor Arterial	Asphalt	43	178	43	893	87	69	60	Mod	V Good	5	8	**80**
22140	FAIR AVE	E CHESTNUT AVE	E SPRUCE ST	Minor Arterial	Asphalt	32	489	87	1,826	91	72	60	Mod	V Good	4	6	**84**
23430	FAIR AVE	E SPRUCE ST	E SPRUCE ST	Minor Arterial	Asphalt	32	328	58	1,225	93	81	60	Mod	Excellent	5	2	**88**
24610	FAIR AVE	E SPRUCE ST	DS@350S E SPRUCE ST	Minor Arterial	Asphalt	32	350	62	1,307	94	90	60	Mod	Excellent	5	1	**92**
27070	FAIR AVE	DS@350S E SPRUCE ST	E MAPLE ST	Minor Arterial	Asphalt	33	393	72	1513	94	93	60	Mod	Excellent	5	2	**92.3**
29690	FAIR AVE	E MAPLE ST	E BEECH ST	Minor Arterial	Asphalt	32	517	92	1930	91	83	60	Mod	Excellent	5	4	**87.6**
31430	FAIR AVE	E BEECH ST	S 10TH ST	Minor Arterial	Asphalt	32	401	71	1497	71	83	30	Weak	V Good	27	2	**73.7**
31870	FAIR AVE	S 10TH ST	HIGH ST	Minor Arterial	Asphalt	32	65	12	243	57	70	60	Mod	Good	32	12	**60**
33710	FAIR AVE	HIGH ST	E RACE ST	Minor Arterial	Asphalt	32	272	48	1,015	70	77	60	Mod	V Good	20	10	**72**
34780	FAIR AVE	E RACE ST	E ALDER ST	Minor Arterial	Asphalt	32	336	60	1,254	69	84	30	Weak	V Good	23	8	**73**
37110	FAIR AVE	E ALDER ST	E ADAMS ST	Minor Arterial	Asphalt	33	515	94	1,983	70	86	30	Weak	V Good	22	8	**74**
39750	FAIR AVE	E ADAMS ST	PACIFIC AVE	Minor Arterial	Asphalt	43	469	112	2,353	70	70	60	Mod	Good	20	10	**69**
40090	FAIR AVE	PACIFIC AVE	DS@176S PACIFIC AVE	Minor Arterial	Asphalt	53	176	52	1,088	78	66	60	Mod	V Good	5	17	**73**
40610	FAIR AVE	DS@176S PACIFIC AVE	RAINIER ST	Minor Arterial	Asphalt	52	170	49	1,031	91	88	60	Mod	Excellent	0	9	**89**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
41230	FAIR AVE	RAINIER ST	DS@171S RAINIER ST	Minor Arterial	Asphalt	60	171	57	1,197	90	86	60	Mod	Excellent	0	10	**88**
42140	FAIR AVE	DS@171S RAINIER ST	WALKER ST	Minor Arterial	Asphalt	60	169	56	1,183	83	89	60	Mod	Excellent	0	17	**84**
42490	FAIR AVE	WALKER ST	DS@171S WALKER ST	Minor Arterial	Asphalt	59	171	56	1,177	83	88	60	Mod	V Good	5	12	**84**
43580	FAIR AVE	DS@171S WALKER ST	LA SALLE ST	Minor Arterial	Asphalt	59	163	53	1122	80	82	60	Mod	V Good	0	20	**80.1**
45220	FAIR AVE	LA SALLE ST	E ARLINGTON ST	Minor Arterial	Asphalt	59	310	102	2,134	79	89	60	Mod	V Good	5	16	**81**
47100	FAIR AVE	E ARLINGTON ST	CENTRAL AVE	Minor Arterial	Asphalt	58	651	210	4,405	79	87	60	Mod	V Good	8	14	**81**
49380	FAIR AVE	CENTRAL AVE	E NOB HILL BLVD	Minor Arterial	Asphalt	60	660	220	4,620	57	60	60	Mod	Fair	20	23	**56**
49560	FAIR AVE	E NOB HILL BLVD	DS@158S E NOB HILL BLVD	Minor Arterial	Asphalt	42	158	37	774	45	43	80	Strng	Marginal	23	32	**42.6**
49890	FAIR AVE	DS@158S E NOB HILL BLVD	LA FOLLETTE ST	Minor Arterial	Asphalt	42	170	40	833	76	69	80	Strng	V Good	1	23	**73**
51020	FAIR AVE	LA FOLLETTE ST	WILSON LN	Minor Arterial	Asphalt	41	371	85	1,775	77	89	60	Mod	V Good	5	18	**80**
53120	FAIR AVE	WILSON LN	E VIOLA AVE	Minor Arterial	Asphalt	44	660	161	3,388	73	87	60	Mod	V Good	9	18	**77**
53760	FAIR AVE	E VIOLA AVE	SIMPSON LN	Minor Arterial	Asphalt	45	323	81	1,696	75	81	60	Mod	V Good	8	17	**76**
54160	FAIR AVE	SIMPSON LN	TENNANT LN	Minor Arterial	Asphalt	43	131	31	657	81	90	60	Mod	V Good	0	19	**83**
55010	FAIR AVE	TENNANT LN	ILER LN	Minor Arterial	Asphalt	42	214	50	1049	74	93	60	Mod	V Good	6	20	**79.6**
55310	FAIR AVE	ILER LN	LINDY LN	Minor Arterial	Asphalt	43	217	52	1,089	83	92	60	Mod	Excellent	0	17	**85**
56630	FAIR AVE	LINDY LN	E MEAD AVE	Minor Arterial	Asphalt	47	444	116	2,435	79	77	60	Mod	V Good	7	14	**77**
12890	FAIRBANKS AVE	N 4TH AVE	DS@179W N 4TH AVE	Local	Asphalt	21	179	21	439	76	55	80	Strng	Good	6	18	**68**
12900	FAIRBANKS AVE	DS@179W N 4TH AVE	N 5TH AVE	Local	Asphalt	25	169	23	493	67	42	80	Strng	Fair	12	21	**57.7**
12920	FAIRBANKS AVE	N 5TH AVE	DS@175W N 5TH AVE	Local	Asphalt	23	175	22	470	72	49	80	Strng	Good	2	27	**63.2**
12870	FAIRBANKS AVE	DS@175W N 5TH AVE	N 6TH AVE	Local	Asphalt	25	164	23	478	80	60	60	Mod	V Good	5	16	**72.3**
12980	FAIRBANKS AVE	N 6TH AVE	DS@652W N 6TH AVE	Local	Asphalt	32	652	116	2434	29	44	80	Strng	Poor	39	26	**32.8**
12990	FAIRBANKS AVE	DS@652W N 6TH AVE	CUSTER AVE	Local	Asphalt	24	288	38	806	52	42	80	Strng	Marginal	23	24	**47.6**
12970	FAIRBANKS AVE	CUSTER AVE	CLARKE AVE	Local	Asphalt	23	467	60	1,253	70	50	80	Strng	Good	4	26	**63**
12950	FAIRBANKS AVE	CLARKE AVE	LEWIS AVE	Local	Asphalt	24	442	59	1238	78	70	60	Mod	V Good	0	22	**74.4**
12940	FAIRBANKS AVE	LEWIS AVE	WEST END	Local	Asphalt	24	444	59	1243	76	56	80	Strng	Good	0	24	**68.7**
12850	FAIRBANKS AVE	EAST END	DS@151W EAST END	Local	Asphalt	24	151	20	423	77	58	80	Strng	V Good	0	23	**70**
12840	FAIRBANKS AVE	DS@151W EAST END	N 25TH AVE	Local	Asphalt	24	180	24	504	81	63	60	Mod	V Good	4	15	**74**
12830	FAIRBANKS AVE	N 25TH AVE	N 26TH AVE	Local	Asphalt	24	343	46	960	81	62	80	Strng	V Good	0	19	**74**
12810	FAIRBANKS AVE	N 26TH AVE	DS@330W N 26TH AVE	Local	Asphalt	25	330	46	963	76	55	60	Mod	Good	7	18	**68**
12790	FAIRBANKS AVE	DS@330W N 26TH AVE	WEST END	Local	Asphalt	25	180	25	525	76	55	60	Mod	Good	9	15	**68**
13130	FAIRBANKS AVE	N 34TH AVE	MESSINA DR	Local	Asphalt	32	841	150	3,140	38	60	60	Mod	Marginal	33	29	**44**
13110	FAIRBANKS AVE	MESSINA DR	N 37TH AVE	Local	Asphalt	33	184	34	708	28	49	80	Strng	Poor	31	41	**34**
13090	FAIRBANKS AVE	N 37TH AVE	N 39TH AVE	Local	Asphalt	33	482	88	1856	38	67	80	Strng	Marginal	21	42	**46.4**
13100	FAIRBANKS AVE	N 39TH AVE	N 39TH AVE	Local	Asphalt	33	185	34	712	36	76	80	Strng	Marginal	24	40	**48.2**
51370	FAIRBROOK DR	S 45TH AVE	S 46TH AVE	Local	Asphalt	31	407	70	1472	64	40	80	Strng	Fair	13	23	**55.2**
5910	FECHTER RD	EAST END	N 42ND PL	Major Collector	Asphalt	28	637	100	2,094	47	52	80	Strng	Marginal	20	33	**47**
72930	FECHTER RD	N 42ND PL	CASTLEVALE RD	Major Collector	Asphalt	24	214	29	599	46	46	80	Strng	Marginal	21	34	**44**
6660	FECHTER RD	SCENIC DR	DS@309W SCENIC DR	Major Collector	Asphalt	20	309	34	721	95	84	60	Mod	Excellent	5	0	**91**
70600	FECHTER RD	DS@309W SCENIC DR	SURREY LN	Major Collector	Asphalt	38	758	160	3,360	72	49	60	Mod	Good	28	0	**63**
5420	FELLOWS DR	DONALD DR	SCENIC DR	Local	Asphalt	31	412	71	1,490	52	50	80	Strng	Fair	7	41	**50**
4920	FELLOWS DR	SCENIC DR	NORTH END	Local	Asphalt	31	302	52	1,092	67	41	80	Strng	Fair	0	33	**57**
5450	FELLOWS DR	DONALD DR	DS@146W DONALD DR	Local	Asphalt	33	146	27	562	66	60	80	Strng	Good	0	34	**63**
5510	FELLOWS DR	DS@146W DONALD DR	DS@415W DONALD DR	Local	Asphalt	33	269	49	1,036	62	68	80	Strng	Good	6	33	**63**
5640	FELLOWS DR	DS@415W DONALD DR	DS@534W DONALD DR	Local	Asphalt	31	120	21	434	68	66	80	Strng	Good	3	29	**67**
5880	FELLOWS DR	DS@534W DONALD DR	FECHTER RD	Local	Asphalt	32	180	32	672	64	51	80	Strng	Fair	10	26	**59**
71820	FENTON ST	UNION ST	EAST END	Local	Asphalt	24	418	56	1,170	36	46	80	Strng	Poor	30	34	**38**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
23070	FOLSOM AVE	PIERCE AVE	OREGON AVE	Local	Asphalt	24	460	61	1288	61	41	80	Strng	Fair	16	23	**53.2**
23090	FOLSOM AVE	OREGON AVE	KERR ST	Local	Asphalt	23	81	10	217	44	37	80	Strng	Marginal	26	30	**41**
23060	FOLSOM AVE	KERR ST	CUSTER AVE	Local	Asphalt	24	388	52	1086	60	51	60	Mod	Fair	18	22	**55.8**
23030	FOLSOM AVE	CUSTER AVE	CLARKE AVE	Local	Asphalt	24	460	61	1,288	27	37	60	Mod	Poor	47	26	**29**
23220	FOLSOM AVE	CLARKE AVE	DS@454W CLARKE AVE	Local	Asphalt	24	454	61	1271	65	51	60	Mod	Good	15	20	**59.3**
23230	FOLSOM AVE	DS@454W CLARKE AVE	LEWIS AVE	Local	Asphalt	24	121	16	339	77	58	80	Strng	V Good	1	21	**70**
23200	FOLSOM AVE	LEWIS AVE	DS@337W LEWIS AVE	Local	Asphalt	24	337	45	944	77	77	60	Mod	V Good	3	20	**76.3**
23180	FOLSOM AVE	DS@337W LEWIS AVE	N 16TH AVE	Local	Asphalt	24	337	45	944	77	58	60	Mod	V Good	5	18	**70**
23510	FOLSOM AVE	N 32ND AVE	N 33RD AVE	Local	Asphalt	33	463	85	1,783	49	52	80	Strng	Fair	11	40	**49**
42400	FRASER WY	S 27TH AVE	S 28TH AVE	Local	Asphalt	32	327	58	1221	78	59	80	Strng	V Good	3	20	**70.6**
44190	FRASER WY	S 28TH AVE	W ARLINGTON ST	Local	Asphalt	33	572	105	2,202	68	66	80	Strng	Good	6	26	**67**
60040	FREMONT DR	TERRY AVE	DS@759S TERRY AVE	Local	Asphalt	33	759	139	2,922	71	71	80	Strng	V Good	3	26	**70**
60180	FREMONT DR	DS@759S TERRY AVE	PARSONS LP	Local	Asphalt	31	503	87	1,819	63	68	80	Strng	Good	10	27	**64**
60200	FREMONT DR	PARSONS LP	S 66TH AVE	Local	Asphalt	32	249	44	930	74	60	80	Strng	Good	0	26	**68.5**
60420	FREMONT ST	CORNELL AVE	DS@160W CORNELL AVE	Local	Asphalt	22	160	20	411	71	48	60	Mod	Good	17	13	**62**
60400	FREMONT ST	DS@160W CORNELL AVE	S 7TH AVE	Local	Asphalt	22	172	21	441	75	54	60	Mod	Good	15	11	**67**
60390	FREMONT ST	S 7TH AVE	S 8TH AVE	Local	Asphalt	27	326	49	1,027	78	59	60	Mod	V Good	10	12	**70**
60370	FREMONT ST	S 8TH AVE	S 9TH AVE	Local	Asphalt	22	331	40	850	76	56	60	Mod	Good	7	17	**69**
60350	FREMONT ST	S 9TH AVE	S 10TH AVE	Local	Asphalt	25	326	45	951	81	62	60	Mod	V Good	10	9	**74**
60120	FREMONT WY	S 72ND AVE	S 74TH AVE	Local	Asphalt	32	644	114	2,404	62	69	80	Strng	Good	11	27	**63**
70980	FREMONT WY	S 74TH AVE	S 76TH AVE	Local	Asphalt	30	866	144	3,031	65	70	60	Mod	Good	11	24	**66**
70990	FREMONT WY	S 76TH AVE	WEST END	Local	Asphalt	35	1,046	205	4,295	89	70	60	Mod	V Good	4	7	**82**
3350	FRONT ST	OAK ST	DS@159N OAK ST	Local	Asphalt	32	159	28	594	36	60	60	Mod	Marginal	33	30	**43**
3250	FRONT ST	DS@159N OAK ST	SYCAMORE ST	Local	Asphalt	31	151	26	546	42	64	80	Strng	Marginal	23	35	**47.9**
3120	FRONT ST	SYCAMORE ST	DS@152N SYCAMORE ST	Local	Asphalt	32	152	27	567	45	58	80	Strng	Marginal	18	37	**48.5**
3030	FRONT ST	DS@152N SYCAMORE ST	TAMARACK AVE	Local	Asphalt	32	202	36	754	30	39	80	Strng	Poor	40	30	**32**
16530	FRONT ST	E LINCOLN AVE	W D ST	Local	Asphalt	44	483	118	2,479	50	43	60	Mod	Marginal	30	20	**47**
14710	FRONT ST	W D ST	E E ST	Local	Asphalt	44	476	116	2443	73	59	60	Mod	Good	8	19	**67.6**
12630	FRONT ST	E E ST	E F ST	Local	Asphalt	41	479	109	2,291	63	60	60	Mod	Good	19	18	**61**
11240	FRONT ST	E F ST	E G ST	Local	Asphalt	42	481	112	2,357	75	65	60	Mod	V Good	10	15	**71**
9950	FRONT ST	E G ST	E H ST	Local	Asphalt	37	498	102	2,150	58	53	60	Mod	Fair	24	18	**55**
8430	FRONT ST	E H ST	DS@653N E H ST	Local	Asphalt	38	653	138	2,895	75	55	60	Mod	Good	9	16	**67**
6830	FRONT ST	DS@653N E H ST	W I ST	Local	Asphalt	37	266	55	1,148	77	58	60	Mod	V Good	8	15	**70**
18740	FRONT ST	E MARTIN LUTHER KING JR BLVD	E LINCOLN AVE	Local	Asphalt	37	480	99	2,072	93	81	60	Mod	Excellent	0	7	**89**
22670	FRONT ST	E YAKIMA AVE	DS@191N E YAKIMA AVE	Local	Asphalt	44	191	47	980	56	18	80	Strng	Marginal	0	44	**42**
20980	FRONT ST	STAFF SGT PENDLETON WAY	E MARTIN LUTHER KING JR BLVD	Local	Asphalt	44	484	118	2,485	93	80	60	Mod	Excellent	4	3	**88**
23460	FRONT ST	E YAKIMA AVE	DS@183S E YAKIMA AVE	Local	Asphalt	46	183	47	982	56	39	80	Strng	Fair	0	44	**49**
24510	FRONT ST	DS@183S E YAKIMA AVE	E CHESTNUT AVE	Local	Asphalt	45	302	76	1586	50	54	80	Strng	Fair	20	31	**50.3**
27160	FRONT ST	E CHESTNUT AVE	E WALNUT ST	Local	Asphalt	37	485	100	2,094	50	47	80	Strng	Marginal	14	36	**48**
29210	FRONT ST	E WALNUT ST	E SPRUCE ST	Local	Concrete	40	474	105	2,212	49	40	60	Mod	Marginal	0	0	**46**
31480	FRONT ST	E SPRUCE ST	E PINE ST	Local	Asphalt	40	491	109	2291	53	52	60	Mod	Fair	23	24	**51.2**
34060	FRONT ST	E PINE ST	E MAPLE ST	Local	Asphalt	38	474	100	2,101	37	56	60	Mod	Marginal	34	28	**42**
36320	FRONT ST	E MAPLE ST	E BEECH ST	Local	Asphalt	39	486	105	2,211	47	57	80	Strng	Fair	23	29	**50**
37500	FRONT ST	E BEECH ST	E RACE ST	Local	Asphalt	37	477	98	2059	56	55	80	Strng	Fair	17	26	**54.9**
8410	FRUITVALE BLVD	QUINCE ST	N 5TH AVE	Truck Route	Asphalt	30	133	22	466	63	50	80	Strng	Fair	14	23	**58**
72980	FRUITVALE BLVD	N 5TH AVE	FRUITVALE BLVD	Truck Route	Concrete	23	170	22	456	100	90	60	Mod	Excellent	0	0	**96**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
69730	FRUITVALE BLVD	N 5TH AVE	DS@112W N 5TH AVE	Truck Route	Concrete	24	112	15	314	100	90	60	Mod	Excellent	0	0	**96.1**
69740	FRUITVALE BLVD	DS@112W N 5TH AVE	N 6TH AVE	Truck Route	Asphalt	59	227	74	1563	74	58	80	Strng	Good	6	20	**67.6**
7850	FRUITVALE BLVD	N 6TH AVE	DS@344W N 6TH AVE	Truck Route	Asphalt	80	344	153	3211	68	87	60	Mod	V Good	13	19	**73.7**
7740	FRUITVALE BLVD	DS@344W N 6TH AVE	DS@646W N 6TH AVE	Truck Route	Asphalt	82	302	138	2889	76	97	60	Mod	V Good	4	20	**82.5**
7750	FRUITVALE BLVD	DS@646W N 6TH AVE	DS@989W N 6TH AVE	Truck Route	Asphalt	79	343	151	3,161	71	97	60	Mod	V Good	9	21	**79**
7760	FRUITVALE BLVD	DS@989W N 6TH AVE	N 9TH AVE	Truck Route	Asphalt	79	168	74	1,548	62	83	60	Mod	Good	9	29	**68**
7770	FRUITVALE BLVD	N 9TH AVE	DS@161W N 9TH AVE	Truck Route	Asphalt	80	161	72	1,503	63	86	60	Mod	V Good	11	26	**69**
7720	FRUITVALE BLVD	DS@161W N 9TH AVE	N 10TH AVE	Truck Route	Asphalt	78	166	72	1,511	65	87	60	Mod	V Good	8	27	**72**
7680	FRUITVALE BLVD	N 10TH AVE	N 11TH AVE	Truck Route	Asphalt	80	190	84	1,773	64	83	60	Mod	V Good	13	23	**70**
7690	FRUITVALE BLVD	N 11TH AVE	N 14TH AVE	Truck Route	Asphalt	79	317	139	2,922	65	90	60	Mod	V Good	12	23	**72**
7710	FRUITVALE BLVD	N 14TH AVE	N 15TH AVE	Truck Route	Asphalt	79	315	138	2903	65	87	60	Mod	V Good	6	29	**71.3**
7670	FRUITVALE BLVD	N 15TH AVE	N 16TH AVE	Truck Route	Asphalt	80	343	152	3201	66	68	60	Mod	Good	10	24	**65.4**
7630	FRUITVALE BLVD	N 16TH AVE	DS@429W N 16TH AVE	Truck Route	Asphalt	80	429	191	4004	69	68	60	Mod	Good	13	18	**68**
7610	FRUITVALE BLVD	DS@429W N 16TH AVE	N 18TH AVE	Truck Route	Asphalt	80	241	107	2249	68	83	60	Mod	V Good	15	17	**71.9**
7600	FRUITVALE BLVD	N 18TH AVE	DS@286W N 18TH AVE	Truck Route	Asphalt	79	286	126	2636	67	81	60	Mod	V Good	16	17	**70.4**
7580	FRUITVALE BLVD	DS@286W N 18TH AVE	N 20TH AVE	Truck Route	Asphalt	79	373	164	3438	66	90	60	Mod	V Good	12	22	**73.3**
7570	FRUITVALE BLVD	N 20TH AVE	N 21ST AVE	Truck Route	Asphalt	79	435	191	4009	72	85	60	Mod	V Good	11	16	**75.7**
7550	FRUITVALE BLVD	N 21ST AVE	DS@258W N 21ST AVE	Truck Route	Asphalt	79	258	113	2,378	70	79	60	Mod	V Good	11	19	**72**
7530	FRUITVALE BLVD	DS@258W N 21ST AVE	DS@394W N 21ST AVE	Truck Route	Asphalt	81	137	62	1295	75	88	60	Mod	V Good	6	19	**78.8**
7500	FRUITVALE BLVD	DS@394W N 21ST AVE	DS@570W N 21ST AVE	Truck Route	Asphalt	79	176	77	1622	74	90	60	Mod	V Good	7	19	**78.3**
7390	FRUITVALE BLVD	DS@570W N 21ST AVE	N 24TH AVE	Truck Route	Asphalt	80	251	112	2343	71	91	60	Mod	V Good	6	23	**77.1**
7300	FRUITVALE BLVD	N 24TH AVE	DS@505W N 24TH AVE	Truck Route	Asphalt	78	505	219	4,596	68	84	60	Mod	V Good	11	21	**73**
72500	FRUITVALE BLVD	DS@505W N 24TH AVE	N 26TH AVE	Truck Route	Asphalt	70	390	152	3,185	65	89	60	Mod	V Good	17	17	**73**
72490	FRUITVALE BLVD	N 26TH AVE	DS@294W N 26TH AVE	Truck Route	Asphalt	52	294	85	1,784	60	94	60	Mod	V Good	15	25	**70**
5780	FRUITVALE BLVD	DS@294W N 26TH AVE	N 28TH AVE	Truck Route	Asphalt	54	460	138	2898	56	90	60	Mod	Good	14	29	**66.4**
5370	FRUITVALE BLVD	N 28TH AVE	N 29TH AVE	Truck Route	Asphalt	52	364	105	2208	53	90	60	Mod	Good	16	31	**64.5**
5030	FRUITVALE BLVD	N 29TH AVE	N 30TH AVE	Truck Route	Asphalt	55	397	121	2547	53	85	60	Mod	Good	15	32	**62.5**
4700	FRUITVALE BLVD	N 30TH AVE	DS@740W N 30TH AVE	Truck Route	Asphalt	55	740	226	4,748	63	88	60	Mod	V Good	16	22	**70**
4410	FRUITVALE BLVD	DS@740W N 30TH AVE	N 34TH AVE	Truck Route	Asphalt	54	716	215	4,511	47	89	60	Mod	Good	17	37	**60**
3730	FRUITVALE BLVD	N 34TH AVE	CHESTERLY DR	Truck Route	Asphalt	72	1135	454	9534	45	83	60	Mod	Fair	28	27	**56.3**
3340	FRUITVALE BLVD	CHESTERLY DR	LAKESIDE CT	Truck Route	Asphalt	63	550	193	4,043	54	75	60	Mod	Good	26	21	**60**
3170	FRUITVALE BLVD	LAKESIDE CT	N 40TH AVE	Truck Route	Asphalt	68	354	134	2808	49	67	80	Strng	Fair	13	38	**53.8**
72430	FRUITVALE BLVD	N 40TH AVE	US 12 HWY RAMP	Ramp	Asphalt	32	283	50	1057	90	74	60	Mod	V Good	6	3	**84.1**
7370	G ST	N 6TH ST	DS@198E N 6TH ST	Major Collector	Asphalt	32	198	35	739	67	45	80	Strng	Fair	6	27	**59**
7340	G ST	DS@198E N 6TH ST	N 7TH ST	Major Collector	Asphalt	31	191	33	691	59	47	80	Strng	Fair	6	36	**54**
72790	G ST	N 7TH ST	DS@214E N 7TH ST	Major Collector	Concrete	25	214	30	624	70	47	60	Mod	Good	0	0	**61**
72780	G ST	DS@214E N 7TH ST	N 8TH ST	Major Collector	Concrete	25	171	24	499	25	44	60	Mod	Poor	0	0	**31**
9260	G ST	N 1ST ST	DS@198E N 1ST ST	Major Collector	Asphalt	37	198	41	855	35	45	60	Mod	Poor	39	26	**37**
9010	G ST	DS@198E N 1ST ST	N 2ND ST	Major Collector	Asphalt	37	201	41	868	44	48	80	Strng	Marginal	23	33	**44**
8910	G ST	N 2ND ST	DS@201E N 2ND ST	Major Collector	Asphalt	39	201	44	915	23	39	60	Mod	Poor	49	28	**27**
8830	G ST	DS@201E N 2ND ST	N 3RD ST	Major Collector	Asphalt	40	199	44	929	32	54	60	Mod	Poor	38	30	**38**
8560	G ST	N 3RD ST	DS@199E N 3RD ST	Major Collector	Asphalt	40	199	44	929	43	64	60	Mod	Marginal	29	29	**48.5**
8480	G ST	DS@199E N 3RD ST	N 4TH ST	Major Collector	Asphalt	40	202	45	943	52	68	80	Strng	Fair	14	35	**55.8**
8320	G ST	N 4TH ST	DS@198E N 4TH ST	Major Collector	Asphalt	32	198	35	739	36	48	80	Strng	Marginal	32	32	**39**
8210	G ST	DS@198E N 4TH ST	N NACHES AVE	Major Collector	Asphalt	32	220	39	821	34	50	80	Strng	Poor	33	32	**38**
8080	G ST	N NACHES AVE	DS@222E N NACHES AVE	Major Collector	Asphalt	33	222	41	855	58	47	80	Strng	Fair	11	31	**53**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
7520	G ST	DS@222E N NACHES AVE	N 6TH ST	Major Collector	Asphalt	32	200	36	747	57	52	80	Strng	Fair	6	37	**54**
9940	G ST	N FRONT ST	DS@191E N FRONT ST	Local	Asphalt	40	191	42	891	80	82	60	Mod	V Good	6	14	**79.8**
9410	G ST	DS@191E N FRONT ST	N 1ST ST	Local	Asphalt	40	202	45	943	69	45	80	Strng	Good	2	29	**60**
47190	GARDEN AVE	S 76TH AVE	DS@251W S 76TH AVE	Local	Asphalt	31	251	43	908	45	46	80	Strng	Marginal	23	32	**44.4**
47200	GARDEN AVE	DS@251W S 76TH AVE	S 78TH AVE	Local	Asphalt	31	137	24	495	56	55	60	Mod	Fair	20	24	**54.3**
47180	GARDEN AVE	S 78TH AVE	S 79TH AVE	Local	Asphalt	31	140	24	506	71	51	80	Strng	Good	0	29	**63.5**
47340	GARDEN AVE	S 85TH AVE	S 88TH AVE	Local	Asphalt	32	1054	187	3935	65	58	80	Strng	Good	9	25	**61.7**
47290	GARDEN AVE	S 89TH AVE	S 90TH AVE	Local	Asphalt	32	222	39	829	66	48	60	Mod	Good	15	19	**59.1**
47310	GARDEN AVE	S 90TH AVE	S 91ST AVE	Local	Asphalt	32	258	46	963	58	52	80	Strng	Fair	15	27	**54.9**
11480	GARDEN PARK WY	SE END	N 42ND AVE	Local	Asphalt	43	196	46	973	68	46	80	Strng	Good	11	21	**59.6**
11310	GARDEN PARK WY	N 42ND AVE	N 43RD AVE	Local	Asphalt	32	231	41	862	100	90	60	Mod	Excellent	0	0	**96**
11270	GARDEN PARK WY	N 43RD AVE	N 44TH AVE	Local	Asphalt	31	269	46	973	100	90	60	Mod	Excellent	0	0	**95.6**
10980	GARDEN PARK WY	N 44TH AVE	WEST END	Local	Asphalt	17	205	19	407	60	32	80	Strng	Fair	15	25	**49.7**
18830	GARFIELD AVE	PIERCE AVE	OREGON AVE	Local	Asphalt	31	459	79	1660	75	54	80	Strng	Good	7	18	**66.9**
18850	GARFIELD AVE	OREGON AVE	CUSTER AVE	Local	Asphalt	32	473	84	1,766	80	61	60	Mod	V Good	6	14	**73**
18880	GARFIELD AVE	CUSTER AVE	CLARKE AVE	Local	Asphalt	32	459	82	1,714	74	53	80	Strng	Good	6	20	**66**
18910	GARFIELD AVE	CLARKE AVE	LEWIS AVE	Local	Asphalt	31	450	78	1,628	74	53	60	Mod	Good	8	18	**66**
18940	GARFIELD AVE	LEWIS AVE	N 16TH AVE	Local	Asphalt	32	800	142	2,987	74	53	80	Strng	Good	5	21	**67**
8630	GARRETT ST	N 9TH AVE	DS@162W N 9TH AVE	Local	Asphalt	31	162	28	586	72	69	80	Strng	V Good	4	24	**70**
8610	GARRETT ST	DS@162W N 9TH AVE	N 10TH AVE	Local	Asphalt	31	167	29	604	73	51	80	Strng	Good	0	27	**65**
8650	GARRETT ST	N 10TH AVE	N 11TH AVE	Local	Asphalt	31	189	33	684	62	32	80	Strng	Fair	5	33	**51**
72730	GARRETT ST	N 11TH AVE	DS@99W N 11TH AVE	Local	Asphalt	31	99	17	358	59	65	80	Strng	Good	12	30	**59.9**
72740	GARRETT ST	DS@99W N 11TH AVE	DS@300W N 11TH AVE	Local	Asphalt	31	201	35	727	69	63	80	Strng	Good	0	31	**66.4**
8710	GARRETT ST	DS@300W N 11TH AVE	N 15TH AVE	Local	Asphalt	31	332	57	1,201	64	57	80	Strng	Good	4	32	**60**
8750	GARRETT ST	N 16TH AVE	DS@366W N 16TH AVE	Local	Asphalt	28	366	57	1,196	92	76	60	Mod	Excellent	0	8	**86**
8720	GARRETT ST	DS@366W N 16TH AVE	N 18TH AVE	Local	Asphalt	42	301	70	1,475	92	75	60	Mod	Excellent	0	8	**86**
8770	GARRETT ST	NE END	N 27TH AVE	Local	Asphalt	26	92	13	279	78	59	80	Strng	V Good	0	22	**71.1**
8780	GARRETT ST	N 27TH AVE	WEST END	Local	Asphalt	27	180	27	567	79	62	80	Strng	V Good	0	21	**72.9**
31090	GILBERT DR	W YAKIMA AVE	BARGE ST	Local	Asphalt	33	262	48	1009	71	51	80	Strng	Good	8	22	**63.2**
29820	GILBERT DR	BARGE ST	SUMMITVIEW AVE	Local	Asphalt	34	914	173	3626	35	36	80	Strng	Poor	29	35	**34.2**
16790	GLACIER WY	N 52ND AVE	DS@332W N 52ND AVE	Local	Asphalt	32	332	59	1239	84	66	60	Mod	V Good	0	16	**77.3**
16760	GLACIER WY	DS@332W N 52ND AVE	DS@662W N 52ND AVE	Local	Asphalt	32	330	59	1232	69	53	80	Strng	Good	8	22	**63**
16730	GLACIER WY	DS@662W N 52ND AVE	DS@1230W N 52ND AVE	Local	Asphalt	32	567	101	2117	77	66	80	Strng	V Good	0	23	**73.1**
16710	GLACIER WY	DS@1230W N 52ND AVE	N 56TH AVE	Local	Asphalt	32	239	42	892	66	40	80	Strng	Fair	14	20	**56.6**
16250	GLACIER WY	N 58TH AVE	DS@320W N 58TH AVE	Local	Asphalt	32	320	57	1,195	61	34	80	Strng	Fair	12	27	**51**
16210	GLACIER WY	DS@320W N 58TH AVE	N 60TH AVE	Local	Asphalt	32	554	98	2,068	34	40	80	Strng	Poor	32	35	**35**
16180	GLACIER WY	N 60TH AVE	N 61ST AVE	Local	Asphalt	32	334	59	1247	61	61	80	Strng	Good	8	32	**59.9**
16850	GLACIER WY	N 75TH AVE	N 77TH AVE	Local	Asphalt	33	519	95	1998	72	49	80	Strng	Good	7	21	**63.5**
43850	GLENMOOR CIR	S 46TH AVE	S 47TH AVE	Local	Asphalt	24	508	68	1,422	65	59	80	Strng	Good	8	27	**62**
45770	GLENSIDE CT	S 48TH AVE	S 49TH AVE	Local	Asphalt	36	284	57	1,193	56	70	80	Strng	Good	0	44	**60**
45750	GLENSIDE CT	S 49TH AVE	S 50TH AVE	Local	Asphalt	36	263	53	1,105	62	64	80	Strng	Good	7	31	**62**
3400	GORDON RD	OAK ST	DS@159N OAK ST	Local	Asphalt	32	159	28	594	75	55	60	Mod	Good	11	14	**67**
3260	GORDON RD	DS@159N OAK ST	SYCAMORE ST	Local	Asphalt	30	144	24	504	97	88	60	Mod	Excellent	0	3	**93**
3160	GORDON RD	SYCAMORE ST	DS@159N SYCAMORE ST	Local	Asphalt	28	159	25	519	92	76	60	Mod	Excellent	1	7	**85.9**
3050	GORDON RD	DS@159N SYCAMORE ST	TAMARACK AVE	Local	Asphalt	24	202	27	566	75	55	60	Mod	Good	14	11	**68**
2940	GORDON RD	TAMARACK AVE	DS@1886N TAMARACK AVE	Local	Asphalt	29	1,886	304	6,381	76	64	60	Mod	V Good	8	16	**71**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
2280	GORDON RD	DS@1886N TAMARACK AVE	N 6TH AVE	Local	Asphalt	30	547	91	1,915	69	78	60	Mod	V Good	10	18	**71**
69570	GORDON RD	N 6TH AVE	DS@415N N 6TH AVE	Local	Asphalt	25	415	58	1,210	77	62	60	Mod	V Good	8	15	**72**
69560	GORDON RD	DS@415N N 6TH AVE	DS@1500E N 6TH AVE	Local	Asphalt	27	1,085	163	3,418	63	63	60	Mod	Good	12	14	**62**
34010	GRAHAM ST	S 18TH AVE	DS@164W S 18TH AVE	Local	Asphalt	24	164	22	459	62	39	80	Strng	Fair	14	24	**52.9**
34020	GRAHAM ST	DS@164W S 18TH AVE	S 19TH AVE	Local	Asphalt	24	167	22	468	82	63	60	Mod	V Good	11	8	**74.6**
51590	GRANT ST	S 16TH AVE	DS@398W S 16TH AVE	Local	Asphalt	23	398	51	1,068	65	57	80	Strng	Good	11	24	**61**
51570	GRANT ST	DS@398W S 16TH AVE	S 18TH AVE	Local	Asphalt	23	303	39	813	77	59	80	Strng	V Good	4	19	**70**
51560	GRANT ST	S 18TH AVE	DS@182W S 18TH AVE	Local	Asphalt	21	182	21	446	85	68	60	Mod	V Good	4	10	**78.6**
51540	GRANT ST	DS@182W S 18TH AVE	S 20TH AVE	Local	Asphalt	21	438	51	1,073	82	63	60	Mod	V Good	5	13	**75**
12230	GRAYSTONE CT	N 78TH AVE	EAST END	Local	Asphalt	38	504	107	2,250	69	50	80	Strng	Good	7	24	**62**
3770	GREEN RIDGE DR	EAST END	DS@1420W EAST END	Local	Asphalt	15	1,420	118	2,485	29	61	80	Strng	Poor	33	38	**39**
3780	GREEN RIDGE DR	DS@1420W EAST END	PECKS CANYON RD	Local	Asphalt	22	616	75	1,581	60	52	80	Strng	Fair	17	24	**56**
53550	GREENWAY ST	S 18TH AVE	DS@348W S 18TH AVE	Local	Asphalt	23	348	44	934	74	54	80	Strng	Good	5	21	**66**
53530	GREENWAY ST	DS@348W S 18TH AVE	S 20TH AVE	Local	Asphalt	20	275	31	642	74	52	80	Strng	Good	7	20	**66**
54030	GREGORY AVE	S 32ND AVE	DS@365W S 32ND AVE	Local	Asphalt	36	365	73	1,533	59	63	80	Strng	Good	9	32	**59**
54040	GREGORY AVE	DS@365W S 32ND AVE	S 34TH AVE	Local	Asphalt	34	292	55	1158	49	65	80	Strng	Fair	17	34	**53.2**
54020	GREGORY AVE	S 34TH AVE	DS@434W S 34TH AVE	Local	Asphalt	36	434	87	1823	55	53	80	Strng	Fair	18	27	**53.2**
54000	GREGORY AVE	DS@434W S 34TH AVE	S 36TH AVE	Local	Asphalt	36	220	44	924	64	51	80	Strng	Fair	6	30	**59.1**
53990	GREGORY CT	S 36TH AVE	WEST END	Local	Asphalt	44	172	42	887	58	34	80	Strng	Fair	20	21	**49.1**
53650	GREGORY PL	EAST END	S 72ND AVE	Local	Asphalt	38	541	114	2,395	74	61	60	Mod	Good	13	13	**69**
45950	GROVE AVE	S 85TH AVE	S 88TH AVE	Local	Asphalt	32	1052	187	3927	70	65	60	Mod	Good	9	21	**67.6**
45920	GROVE AVE	S 89TH AVE	S 90TH AVE	Local	Asphalt	32	269	48	1,004	74	61	80	Strng	Good	0	26	**69**
45900	GROVE AVE	S 90TH AVE	S 91ST AVE	Local	Asphalt	32	259	46	967	74	62	80	Strng	V Good	0	26	**69.4**
6360	H ST	N 6TH ST	DS@201E N 6TH ST	Local	Asphalt	24	201	27	563	18	37	80	Strng	V Poor	49	33	**24**
6320	H ST	DS@201E N 6TH ST	N 7TH ST	Local	Asphalt	20	193	21	450	29	42	80	Strng	Poor	36	36	**32**
6330	H ST	N 7TH ST	EAST END	Local	Asphalt	66	195	72	1,502	50	20	80	Strng	Marginal	14	35	**39**
8150	H ST	N 1ST ST	DS@198E N 1ST ST	Local	Asphalt	30	198	33	693	65	44	80	Strng	Fair	16	19	**57**
8000	H ST	DS@198E N 1ST ST	N 2ND ST	Local	Asphalt	26	208	30	631	81	62	60	Mod	V Good	1	18	**74**
7420	H ST	N 2ND ST	DS@193E N 2ND ST	Local	Asphalt	26	193	28	585	75	54	60	Mod	Good	8	17	**67**
7360	H ST	DS@193E N 2ND ST	DS@393E N 2ND ST	Local	Asphalt	26	200	29	607	68	60	60	Mod	Good	10	22	**65**
7270	H ST	DS@393E N 2ND ST	DS@592E N 2ND ST	Local	Asphalt	37	198	41	855	64	59	60	Mod	Good	14	21	**61**
7180	H ST	DS@592E N 2ND ST	N 4TH ST	Local	Asphalt	39	199	43	905	70	46	80	Strng	Good	5	25	**61**
7020	H ST	N 4TH ST	DS@201E N 4TH ST	Local	Asphalt	40	201	45	938	74	52	80	Strng	Good	8	18	**66**
6890	H ST	DS@201E N 4TH ST	N NACHES AVE	Local	Asphalt	22	221	27	567	73	62	60	Mod	Good	9	17	**68**
6810	H ST	N NACHES AVE	DS@218E N NACHES AVE	Local	Asphalt	23	218	28	585	79	59	60	Mod	V Good	4	17	**71**
6600	H ST	DS@218E N NACHES AVE	N 6TH ST	Local	Asphalt	23	201	26	539	89	70	60	Mod	V Good	0	11	**82**
8420	H ST	N FRONT ST	DS@191E N FRONT ST	Local	Asphalt	32	191	34	713	64	41	80	Strng	Fair	7	29	**55**
8260	H ST	DS@191E N FRONT ST	N 1ST ST	Local	Asphalt	26	200	29	607	69	44	80	Strng	Good	1	30	**60**
47210	HAGAR AVE	BONNIE DOONE AVE	SOUTH END	Local	Asphalt	26	236	34	718	14	21	80	Strng	V Poor	49	38	**16**
26590	HALL AVE	SUMMITVIEW AVE	BROWNE AVE	Local	Concrete	30	345	58	1,208	36	30	60	Mod	Poor	0	0	**33**
30490	HALL AVE	W YAKIMA AVE	DS@277N W YAKIMA AVE	Local	Concrete	30	277	46	970	54	41	60	Mod	Fair	0	0	**49**
29110	HALL AVE	DS@277N W YAKIMA AVE	W A ST	Local	Concrete	30	398	66	1,393	38	51	60	Mod	Marginal	0	0	**41**
27410	HALL AVE	W A ST	SUMMITVIEW AVE	Local	Concrete	31	168	29	608	32	26	60	Mod	Poor	0	0	**29.1**
52370	HAMILTON AVE	W VIOLA AVE	DS@221S W VIOLA AVE	Local	Asphalt	32	221	39	825	72	55	80	Strng	Good	4	24	**66**
53380	HAMILTON AVE	DS@221S W VIOLA AVE	LILA AVE	Local	Asphalt	32	203	36	758	64	54	80	Strng	Good	4	32	**60**
54340	HAMILTON AVE	NORTH END	W LOGAN AVE	Local	Asphalt	40	193	43	896	46	32	80	Strng	Marginal	19	35	**41**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name

GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
55840	HAMILTON AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	32	643	114	2401	71	65	80	Strng	Good	5	24	**68.2**
49780	HAMM AVE	PLEASANT AVE	DS@167W PLEASANT AVE	Local	Asphalt	24	167	22	468	35	24	80	Strng	Poor	34	31	**31**
49810	HAMM AVE	DS@167W PLEASANT AVE	QUEEN AVE	Local	Asphalt	24	166	22	465	43	33	80	Strng	Poor	28	28	**39**
49820	HAMM AVE	QUEEN AVE	DS@164W QUEEN AVE	Local	Asphalt	24	164	22	459	57	45	80	Strng	Fair	21	22	**52**
49830	HAMM AVE	DS@164W QUEEN AVE	S 12TH AVE	Local	Asphalt	24	164	22	459	75	54	80	Strng	Good	0	25	**66.9**
49800	HAMM AVE	S 12TH AVE	S 13TH AVE	Local	Asphalt	24	319	43	893	64	42	80	Strng	Fair	13	23	**56**
45620	HANRATTY DR	NORTH END	DS@224S NORTH END	Local	Asphalt	24	224	30	627	62	35	80	Strng	Fair	11	27	**52**
46790	HANRATTY DR	DS@224S NORTH END	STEWART ST	Local	Asphalt	23	324	41	869	55	28	80	Strng	Marginal	16	28	**45.3**
5600	HATHAWAY AVE	N 30TH AVE	DS@333W N 30TH AVE	Local	Asphalt	33	333	61	1282	72	49	80	Strng	Good	0	28	**63.2**
72720	HATHAWAY AVE	DS@333W N 30TH AVE	WEST END	Local	Asphalt	37	214	44	925	71	47	80	Strng	Good	11	19	**62**
6120	HATHAWAY ST	W I ST	DS@343W W I ST	Local	Asphalt	31	343	59	1241	99	90	60	Mod	Excellent	0	1	**94.9**
6130	HATHAWAY ST	DS@343W W I ST	N 8TH AVE	Local	Asphalt	40	326	72	1521	97	90	60	Mod	Excellent	0	3	**93.8**
6080	HATHAWAY ST	N 8TH AVE	N 15TH AVE	Local	Asphalt	49	1641	447	9381	91	89	60	Mod	Excellent	7	2	**89.6**
6060	HATHAWAY ST	N 15TH AVE	N 16TH AVE	Local	Asphalt	32	337	60	1258	94	82	60	Mod	Excellent	6	0	**89.1**
5630	HATHAWAY ST	N 29TH AVE	N 30TH AVE	Local	Asphalt	23	334	43	896	81	62	60	Mod	V Good	4	15	**74.2**
22290	HAVEN WY	N 56TH AVE	DS@413W N 56TH AVE	Local	Asphalt	32	413	73	1,542	66	63	80	Strng	Good	5	29	**64**
22270	HAVEN WY	DS@413W N 56TH AVE	DS@697W N 56TH AVE	Local	Asphalt	33	285	52	1097	64	58	80	Strng	Good	5	31	**60.9**
22210	HAVEN WY	DS@697W N 56TH AVE	WEST END	Local	Asphalt	44	59	14	304	64	36	80	Strng	Fair	2	34	**53.5**
21710	HAWTHORNE DR	N 84TH AVE	N 85TH AVE	Local	Asphalt	21	345	40	845	77	57	60	Mod	V Good	5	18	**69.4**
21600	HAWTHORNE DR	N 85TH AVE	DS@308W N 85TH AVE	Local	Asphalt	25	308	43	898	80	61	60	Mod	V Good	7	13	**72.9**
21590	HAWTHORNE DR	DS@308W N 85TH AVE	DS@643W N 85TH AVE	Local	Asphalt	22	335	41	860	82	64	60	Mod	V Good	8	10	**75.2**
22220	HAWTHORNE DR	DS@643W N 85TH AVE	N 88TH AVE	Local	Asphalt	25	397	55	1158	87	68	60	Mod	V Good	0	13	**80.1**
40420	HAYNES ST	S 10TH AVE	DS@158W S 10TH AVE	Local	Asphalt	23	158	20	424	78	58	60	Mod	V Good	8	14	**70.2**
40430	HAYNES ST	DS@158W S 10TH AVE	S 11TH AVE	Local	Asphalt	23	151	19	405	72	50	80	Strng	Good	8	20	**63.7**
40410	HAYNES ST	S 11TH AVE	DS@156W S 11TH AVE	Local	Asphalt	24	156	21	437	87	68	60	Mod	V Good	0	13	**79.8**
40440	HAYNES ST	DS@156W S 11TH AVE	PLEASANT AVE	Local	Asphalt	24	167	22	468	80	61	60	Mod	V Good	8	12	**73.3**
40480	HAYNES ST	PLEASANT AVE	DS@169W PLEASANT AVE	Local	Asphalt	19	169	18	375	63	34	80	Strng	Fair	20	17	**52.6**
40490	HAYNES ST	DS@169W PLEASANT AVE	QUEEN AVE	Local	Asphalt	19	164	17	364	56	20	80	Strng	Marginal	23	21	**43**
40470	HAYNES ST	QUEEN AVE	WEST END	Local	Asphalt	15	165	14	289	36	39	80	Strng	Poor	20	27	**36**
72310	HEATHERS WY	EAST END	S 73RD AVE	Local	Asphalt	52	165	47	997	60	50	80	Strng	Fair	13	28	**56**
72300	HEATHERS WY	S 73RD AVE	WEST END	Local	Asphalt	50	168	47	989	65	53	80	Strng	Good	11	24	**60**
34700	HENRY AVE	W CHESTNUT AVE	LABAN AVE	Local	Asphalt	23	416	53	1,116	54	40	80	Strng	Marginal	22	24	**49**
31880	HIGH ST	S FAIR AVE	DS@185E S FAIR AVE	Local	Asphalt	27	185	28	583	79	59	80	Strng	V Good	0	21	**72**
31900	HIGH ST	DS@185E S FAIR AVE	S 12TH ST	Local	Asphalt	27	179	27	564	81	63	60	Mod	V Good	0	19	**74**
31910	HIGH ST	S 12TH ST	DS@181E S 12TH ST	Local	Asphalt	20	181	20	422	81	62	60	Mod	V Good	4	16	**73.5**
31930	HIGH ST	DS@181E S 12TH ST	S 13TH ST	Local	Asphalt	20	179	20	418	81	62	60	Mod	V Good	3	16	**73.5**
31940	HIGH ST	S 13TH ST	EAST END	Local	Asphalt	20	180	20	420	73	52	60	Mod	Good	13	14	**65.2**
14920	HIGHVIEW DR	N 35TH AVE	DS@472W N 35TH AVE	Local	Asphalt	32	472	84	1762	46	42	80	Strng	Marginal	22	32	**43.5**
14900	HIGHVIEW DR	DS@472W N 35TH AVE	N 37TH AVE	Local	Asphalt	32	285	51	1064	61	34	80	Strng	Fair	15	24	**51.2**
69750	HILL DR	PEACH TEN LN	PECKS CANYON RD	Local	Asphalt	17	556	53	1103	35	28	80	Strng	Poor	37	28	**31.9**
4990	HILLTOP LN	HILLTOP WY	NORTH END	Local	Asphalt	34	87	16	345	45	43	80	Strng	Marginal	19	36	**43.2**
71480	HILLTOP WY	SCENIC DR	HILLTOP LN	Local	Asphalt	35	139	27	568	60	57	80	Strng	Fair	9	31	**58.2**
5000	HILLTOP WY	HILLTOP LN	DS@635W HILLTOP LN	Local	Asphalt	36	635	127	2667	48	48	80	Strng	Marginal	21	31	**46.7**
4710	HILLTOP WY	DS@635W HILLTOP LN	DS@1030W HILLTOP LN	Local	Asphalt	19	395	42	876	17	54	60	Mod	Poor	47	37	**28**
4930	HILLTOP WY	DS@1030W HILLTOP LN	SCENIC DR	Local	Asphalt	28	214	33	699	23	25	80	Strng	V Poor	46	30	**23.3**
58350	HOLLOW CREEK PL	EAST END	S 27TH AVE	Local	Asphalt	41	249	57	1199	94	83	60	Mod	Excellent	0	6	**89.7**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
42280	HOLLY LN	S 73RD AVE	S 74TH AVE	Local	Asphalt	32	389	69	1452	66	62	80	Strng	Good	4	29	**63.7**
39090	HOLTON AVE	W SPRUCE ST	TIETON DR	Local	Asphalt	24	541	72	1515	69	44	60	Mod	Good	15	17	**59.3**
34920	HOME DR	S 32ND AVE	DS@345W S 32ND AVE	Local	Asphalt	23	345	44	926	76	56	60	Mod	Good	7	17	**68.5**
34930	HOME DR	DS@345W S 32ND AVE	S 34TH AVE	Local	Asphalt	23	322	41	864	66	39	80	Strng	Fair	17	18	**56**
63380	HONEYCRISP CT	NE END	OCCIDENTAL RD	Local	Asphalt	36	786	158	3324	80	68	60	Mod	V Good	3	16	**75.4**
63870	HOPE LN	S 79TH AVE	S 80TH AVE	Local	Asphalt	33	307	56	1182	63	66	80	Strng	Good	9	29	**62.7**
63850	HOPE LN	S 80TH AVE	WEST END	Local	Asphalt	33	174	32	670	77	64	80	Strng	V Good	0	23	**72.1**
69680	I ST	N NACHES AVE	DS@230E N NACHES AVE	Major Collector	Asphalt	24	230	31	644	35	46	80	Strng	Poor	33	31	**38**
5960	I ST	DS@230E N NACHES AVE	N 6TH ST	Major Collector	Asphalt	22	117	14	300	77	63	60	Mod	V Good	10	13	**72**
5970	I ST	N 6TH ST	N 6TH ST	Major Collector	Asphalt	31	91	16	329	21	25	80	Strng	V Poor	40	24	**21**
6220	I ST	N 1ST ST	N 2ND ST	Major Collector	Asphalt	39	332	72	1511	48	32	80	Strng	Marginal	30	22	**41.4**
6240	I ST	N 2ND ST	N 2ND ST	Major Collector	Asphalt	39	109	24	496	81	78	60	Mod	V Good	0	19	**79**
6230	I ST	N 2ND ST	BUWALDA LN	Major Collector	Asphalt	40	222	49	1036	54	70	60	Mod	Fair	25	21	**58**
6270	I ST	BUWALDA LN	N 3RD ST	Major Collector	Asphalt	39	179	39	814	54	73	60	Mod	Good	21	25	**58.8**
6300	I ST	N 3RD ST	N 3RD ST	Major Collector	Asphalt	39	184	40	837	24	55	60	Mod	Poor	44	26	**33**
6280	I ST	N 3RD ST	N 4TH ST	Major Collector	Asphalt	40	243	54	1,134	73	87	60	Mod	V Good	0	27	**77**
6030	I ST	N 4TH ST	N 4TH ST	Major Collector	Asphalt	33	88	16	339	85	67	60	Mod	V Good	6	8	**78**
6250	I ST	W I ST	DS@198E W I ST	Truck Route	Asphalt	37	198	41	855	52	62	80	Strng	Fair	19	29	**54**
6200	I ST	DS@198E W I ST	DS@409E W I ST	Truck Route	Asphalt	45	211	53	1,108	69	51	80	Strng	Good	4	28	**62**
6260	I ST	N FRONT ST	DS@216W N FRONT ST	Truck Route	Asphalt	37	216	44	932	64	38	80	Strng	Fair	7	29	**54**
6160	I ST	DS@216W N FRONT ST	N 1ST AVE	Truck Route	Asphalt	33	335	61	1,290	52	61	60	Mod	Fair	24	25	**54**
6170	I ST	N 1ST AVE	N 4TH AVE	Truck Route	Asphalt	34	366	69	1,452	64	66	80	Strng	Good	5	31	**64**
6180	I ST	N 4TH AVE	N 5TH AVE	Truck Route	Asphalt	34	329	62	1,305	62	58	80	Strng	Good	7	31	**60**
6150	I ST	N 5TH AVE	DS@168W N 5TH AVE	Major Collector	Asphalt	32	168	30	627	61	29	80	Strng	Fair	16	23	**49**
6090	I ST	DS@168W N 5TH AVE	N 6TH AVE	Major Collector	Asphalt	34	169	32	670	46	31	80	Strng	Marginal	33	21	**40**
55040	ILER LN	S FAIR AVE	DS@671E S FAIR AVE	Local	Asphalt	25	671	93	1,957	90	72	60	Mod	V Good	4	6	**83**
55030	ILER LN	DS@671E S FAIR AVE	S 13TH ST	Local	Asphalt	24	323	43	904	87	68	60	Mod	V Good	3	11	**79**
24020	IVY CT	EAST END	N 80TH AVE	Local	Asphalt	39	201	43	913	57	28	80	Strng	Marginal	15	28	**46**
5300	J ST	N 3RD ST	DS@171E N 3RD ST	Local	Asphalt	30	171	29	599	66	50	80	Strng	Good	4	30	**60**
5330	J ST	DS@171E N 3RD ST	N 4TH ST	Local	Asphalt	30	174	29	609	74	55	80	Strng	Good	0	26	**67.1**
5490	J ST	WEST END	N 1ST ST	Local	Asphalt	30	283	47	991	51	55	80	Strng	Fair	14	36	**51**
5360	J ST	N 6TH AVE	DS@346W N 6TH AVE	Local	Asphalt	27	346	52	1,090	53	66	60	Mod	Fair	22	26	**56**
5380	J ST	DS@346W N 6TH AVE	N 8TH AVE	Local	Asphalt	28	306	48	1,000	56	76	60	Mod	Good	18	26	**61**
5290	J ST	N 16TH AVE	DS@1047W N 16TH AVE	Local	Asphalt	32	1047	186	3909	63	70	60	Mod	Good	10	27	**64**
5240	J ST	DS@1047W N 16TH AVE	N 20TH AVE	Local	Asphalt	28	279	43	911	70	55	60	Mod	Good	12	18	**64.2**
5260	J ST	N 20TH AVE	N 21ST AVE	Local	Asphalt	35	442	86	1805	37	47	60	Mod	Marginal	35	28	**39.3**
5270	J ST	N 21ST AVE	DS@260W N 21ST AVE	Local	Asphalt	37	260	53	1,122	49	40	80	Strng	Marginal	12	39	**45**
5230	J ST	DS@260W N 21ST AVE	N 23RD AVE	Local	Asphalt	34	303	57	1202	45	44	80	Strng	Marginal	28	27	**43.8**
5220	J ST	N 23RD AVE	DS@285W N 23RD AVE	Local	Asphalt	21	285	33	698	48	37	80	Strng	Marginal	19	33	**43.5**
5200	J ST	DS@285W N 23RD AVE	DS@677W N 23RD AVE	Local	Asphalt	31	391	67	1,414	75	54	80	Strng	Good	5	21	**67**
5190	J ST	DS@677W N 23RD AVE	N 26TH AVE	Local	Asphalt	31	312	54	1,128	70	47	80	Strng	Good	7	23	**62**
5180	J ST	N 26TH AVE	WEST END	Local	Asphalt	16	167	15	312	60	32	80	Strng	Fair	17	23	**49.7**
5020	J ST	N 30TH AVE	WEST END	Local	Asphalt	23	369	47	990	79	60	60	Mod	V Good	10	11	**72**
16090	JACKSON CT	SE END	N 77TH AVE	Local	Asphalt	52	127	36	765	60	33	80	Strng	Fair	10	30	**50.3**
40670	JADE PL	TIETON DR	SOUTH END	Local	Asphalt	39	561	122	2568	68	49	80	Strng	Good	5	27	**61.2**
21820	JEFFERSON AVE	PIERCE AVE	OREGON AVE	Local	Asphalt	31	465	80	1682	78	62	60	Mod	V Good	7	15	**71.9**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
21860	JEFFERSON AVE	OREGON AVE	CUSTER AVE	Local	Asphalt	32	470	84	1,755	72	50	80	Strng	Good	6	21	**64**
21880	JEFFERSON AVE	CUSTER AVE	CLARKE AVE	Local	Asphalt	32	460	82	1717	70	49	80	Strng	Good	8	22	**62.2**
21900	JEFFERSON AVE	CLARKE AVE	LEWIS AVE	Local	Asphalt	32	572	102	2,135	77	57	60	Mod	V Good	10	14	**69**
21540	JEFFERSON AVE	N 32ND AVE	DS@363W N 32ND AVE	Local	Asphalt	32	363	65	1,355	75	55	60	Mod	Good	12	12	**68**
21500	JEFFERSON AVE	DS@363W N 32ND AVE	N 34TH AVE	Local	Asphalt	32	296	53	1,105	83	81	60	Mod	V Good	0	17	**82**
21490	JEFFERSON AVE	N 34TH AVE	N 35TH AVE	Local	Asphalt	31	376	65	1,360	75	71	60	Mod	V Good	6	19	**73**
11980	JEROME AVE	N 6TH AVE	CAMPBELL LN	Local	Asphalt	25	703	98	2,050	37	56	80	Strng	Marginal	30	33	**42**
11930	JEROME AVE	CAMPBELL LN	CUSTER AVE	Local	Asphalt	21	238	28	583	32	44	60	Mod	Poor	41	27	**35**
11890	JEROME AVE	CUSTER AVE	DS@442W CUSTER AVE	Local	Asphalt	21	442	52	1083	57	58	80	Strng	Fair	12	31	**56**
11900	JEROME AVE	DS@442W CUSTER AVE	LEWIS AVE	Local	Asphalt	21	467	54	1144	60	71	80	Strng	Good	6	34	**62.7**
11910	JEROME AVE	LEWIS AVE	WEST END	Local	Asphalt	22	141	17	362	71	56	80	Strng	Good	6	22	**65.4**
11880	JEROME AVE	N 16TH AVE	N 18TH AVE	Local	Asphalt	41	672	153	3214	68	53	60	Mod	Good	18	14	**62**
11840	JEROME AVE	N 18TH AVE	N 19TH AVE	Local	Asphalt	23	330	42	886	72	58	80	Strng	Good	6	22	**66**
11860	JEROME AVE	N 19TH AVE	N 20TH AVE	Local	Asphalt	23	330	42	886	81	62	80	Strng	V Good	0	19	**74**
11820	JEROME AVE	N 20TH AVE	DS@393W N 20TH AVE	Local	Asphalt	22	393	48	1,009	76	56	60	Mod	Good	7	16	**69**
11800	JEROME AVE	DS@393W N 20TH AVE	DS@728W N 20TH AVE	Local	Asphalt	22	335	41	860	74	58	60	Mod	Good	8	17	**68**
11790	JEROME AVE	DS@728W N 20TH AVE	DS@1064W N 20TH AVE	Local	Asphalt	25	336	47	980	81	63	80	Strng	V Good	0	19	**74**
11760	JEROME AVE	DS@1064W N 20TH AVE	N 24TH AVE	Local	Asphalt	25	261	36	761	79	70	60	Mod	V Good	0	21	**75**
11780	JEROME AVE	N 24TH AVE	N 25TH AVE	Local	Asphalt	25	330	46	963	82	63	60	Mod	V Good	0	19	**74**
12010	JEROME AVE	N 25TH AVE	DS@225W N 25TH AVE	Local	Asphalt	32	225	40	840	71	54	80	Strng	Good	0	29	**64.5**
12080	JEROME AVE	DS@225W N 25TH AVE	N 26TH AVE	Local	Asphalt	29	129	21	436	82	66	60	Mod	V Good	0	18	**76**
12180	JEROME AVE	N 26TH AVE	N 27TH AVE	Local	Asphalt	27	243	36	765	74	87	60	Mod	V Good	0	26	**78**
12280	JEROME AVE	N 27TH AVE	N 28TH AVE	Local	Asphalt	25	366	51	1068	69	73	80	Strng	V Good	4	27	**69.4**
34220	JOYCE PL	NORTH END	S 82ND AVE	Local	Asphalt	42	393	91	1,903	49	41	80	Strng	Marginal	13	39	**45**
35540	JOYCE PL	S 82ND AVE	SE END	Local	Asphalt	39	427	92	1,936	70	53	80	Strng	Good	7	23	**63**
23640	JUANITA DR	N 86TH AVE	DS@175W N 86TH AVE	Local	Asphalt	29	175	28	592	100	90	60	Mod	Excellent	0	0	**96**
23650	JUANITA DR	DS@175W N 86TH AVE	N 88TH AVE	Local	Asphalt	27	105	16	331	51	38	80	Strng	Marginal	0	14	**45**
76060	JUANITA DR	N 88TH AVE	SUMMIT CREST WAY	Other	Asphalt	32	203	36	758	90	70	60	Mod	V Good	0	10	**83**
76040	JUANITA DR	SUMMIT CREST WAY	N 89TH AVE	Other	Asphalt	32	361	64	1,348	100	90	60	Mod	Excellent	0	0	**96**
4860	K ST	N 3RD ST	DS@178E N 3RD ST	Local	Asphalt	14	178	14	291	77	57	60	Mod	V Good	11	12	**70**
4840	K ST	DS@178E N 3RD ST	N 4TH ST	Local	Asphalt	14	168	13	274	79	60	60	Mod	V Good	5	16	**72**
4820	K ST	N 4TH ST	N NACHES AVE	Local	Asphalt	31	342	59	1,237	64	49	80	Strng	Fair	7	29	**58**
69670	K ST	N NACHES AVE	N 6TH ST	Local	Asphalt	32	339	60	1,266	57	57	80	Strng	Fair	10	33	**56**
4910	K ST	N 6TH ST	EAST END	Local	Asphalt	34	202	38	801	86	67	60	Mod	V Good	6	8	**79**
22850	KAIL DR	N 85TH AVE	DS@278W N 85TH AVE	Local	Asphalt	23	278	36	746	66	50	60	Mod	Good	16	19	**59**
22870	KAIL DR	DS@278W N 85TH AVE	N 86TH AVE	Local	Asphalt	22	355	43	911	79	60	60	Mod	V Good	11	10	**72.1**
22880	KAIL DR	N 86TH AVE	N 88TH AVE	Local	Asphalt	21	396	46	970	82	63	60	Mod	V Good	8	10	**75**
76050	KAIL DR	N 89TH AVE	SUMMIT CREST WAY	Other	Asphalt	31	375	65	1356	92	78	60	Mod	Excellent	6	2	**87**
52190	KARR AVE	W VIOLA AVE	W VIOLA AVE	Local	Asphalt	33	181	33	697	68	47	80	Strng	Good	10	22	**60**
53350	KARR AVE	W VIOLA AVE	LILA AVE	Local	Asphalt	32	233	41	870	67	59	80	Strng	Good	4	29	**63.2**
54080	KARR AVE	LILA AVE	W LOGAN AVE	Local	Asphalt	31	322	55	1165	68	57	80	Strng	Good	6	26	**63.2**
55790	KARR AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	32	769	137	2,871	60	46	80	Strng	Fair	8	32	**55**
28350	KENNY DR	N 39TH AVE	N 39TH AVE	Local	Asphalt	32	618	110	2,307	49	38	80	Strng	Marginal	29	22	**44**
72630	KERN RD	POWERHOUSE RD	N 39TH AVE	Local	Asphalt	33	917	168	3530	46	59	80	Strng	Fair	17	37	**49.1**
9530	KERN RD	N 39TH AVE	N 40TH AVE	Local	Asphalt	32	388	69	1449	48	56	80	Strng	Fair	15	37	**49.4**
9550	KERN WY	KERN RD	DS@504W KERN RD	Local	Asphalt	20	504	56	1176	70	47	60	Mod	Good	13	17	**61.2**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name

GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
9440	KERN WY	DS@504W KERN RD	N 41ST AVE	Local	Asphalt	20	282	31	658	86	82	60	Mod	V Good	8	6	**83.8**
24330	KERR ST	BROWNE AVE	DS@172N BROWNE AVE	Local	Asphalt	23	172	22	462	80	60	80	Strng	V Good	1	19	**72.5**
23680	KERR ST	DS@172N BROWNE AVE	FOLSOM AVE	Local	Asphalt	23	171	22	459	68	43	60	Mod	Fair	16	16	**58.5**
12750	KIMBERLY PL	EAST END	N 46TH AVE	Local	Asphalt	39	228	49	1030	47	40	80	Strng	Marginal	20	33	**43.5**
57140	KING CT	EAST END	S 26TH AVE	Local	Asphalt	20	150	17	350	72	50	80	Strng	Good	5	23	**64**
57230	KING CT	EAST END	S 27TH AVE	Local	Asphalt	40	193	43	894	55	38	80	Strng	Marginal	10	35	**48.2**
57200	KING CT	S 28TH AVE	EAST END	Local	Asphalt	36	265	53	1103	77	57	60	Mod	Good	6	17	**68.9**
58080	KING ST	MARYLAND ST	S 1ST ST	Local	Asphalt	47	694	181	3805	33	43	80	Strng	Poor	31	36	**35.4**
57920	KING ST	VOELKER AVE	DS@169W VOELKER AVE	Local	Asphalt	27	169	25	532	79	60	60	Mod	V Good	9	11	**72.1**
57900	KING ST	DS@169W VOELKER AVE	LEDWICH AVE	Local	Asphalt	27	161	24	507	95	84	60	Mod	Excellent	0	5	**90.6**
57880	KING ST	ROCK AVE	LANDON AVE	Local	Asphalt	28	331	51	1081	87	68	60	Mod	V Good	4	9	**79.6**
57860	KING ST	LANDON AVE	S 1ST AVE	Local	Asphalt	28	338	53	1104	89	70	60	Mod	V Good	4	7	**82.2**
57780	KING ST	S 1ST AVE	S 2ND AVE	Local	Asphalt	27	329	49	1,036	87	68	60	Mod	V Good	6	7	**80**
57800	KING ST	S 2ND AVE	S 3RD AVE	Local	Asphalt	30	338	56	1183	84	65	60	Mod	V Good	0	16	**77.1**
57740	KING ST	S 3RD AVE	S 4TH AVE	Local	Asphalt	23	334	43	896	86	68	60	Mod	V Good	3	10	**79**
57810	KING ST	S 4TH AVE	S 5TH AVE	Local	Asphalt	28	334	52	1,091	83	64	60	Mod	V Good	0	17	**76**
57830	KING ST	S 5TH AVE	S 6TH AVE	Local	Asphalt	29	318	51	1076	72	49	60	Mod	Good	14	14	**63**
57690	KING ST	S 6TH AVE	CORNELL AVE	Local	Asphalt	28	337	52	1,101	81	63	60	Mod	V Good	3	16	**74**
57710	KING ST	CORNELL AVE	DS@171W CORNELL AVE	Local	Asphalt	24	171	23	479	85	66	60	Mod	V Good	0	15	**78**
57670	KING ST	DS@171W CORNELL AVE	S 7TH AVE	Local	Asphalt	27	152	23	479	83	64	60	Mod	V Good	5	12	**76**
57590	KING ST	PLEASANT AVE	QUEEN AVE	Local	Asphalt	25	300	42	875	62	52	60	Mod	Fair	24	14	**57.7**
57560	KING ST	QUEEN AVE	S 12TH AVE	Local	Asphalt	25	338	47	986	69	45	80	Strng	Good	13	18	**60**
57570	KING ST	S 13TH AVE	S 14TH AVE	Local	Asphalt	27	322	48	1014	74	52	60	Mod	Good	15	11	**65.4**
57580	KING ST	S 14TH AVE	S 15TH AVE	Local	Asphalt	21	320	37	784	100	90	60	Mod	Excellent	0	0	**96**
57250	KING ST	S 16TH AVE	DS@516W S 16TH AVE	Local	Asphalt	20	516	57	1,204	34	53	80	Strng	Marginal	22	34	**39**
57210	KING ST	DS@516W S 16TH AVE	S 18TH AVE	Local	Asphalt	25	187	26	545	56	47	80	Strng	Fair	20	24	**52**
56560	KING ST	S 32ND AVE	S SUNCREST WY	Local	Asphalt	30	377	63	1,320	63	63	80	Strng	Good	9	28	**62**
56510	KING ST	S SUNCREST WY	S 34TH AVE	Local	Asphalt	27	137	21	432	56	54	80	Strng	Fair	15	30	**54**
57390	KING ST	S 67TH AVE	S 68TH AVE	Local	Asphalt	34	270	51	1,071	71	59	80	Strng	Good	4	24	**66**
57360	KING ST	S 68TH AVE	S 69TH AVE	Local	Asphalt	33	257	47	989	78	59	60	Mod	V Good	4	18	**71**
57350	KING ST	S 69TH AVE	S 70TH AVE	Local	Asphalt	33	248	45	955	67	48	80	Strng	Good	7	26	**60**
57330	KING ST	S 70TH AVE	S 72ND AVE	Local	Asphalt	34	525	99	2083	60	53	80	Strng	Fair	11	29	**56.9**
49570	LA FOLLETTE ST	E NOB HILL BLVD	DS@167S E NOB HILL BLVD	Local	Asphalt	22	167	20	429	68	43	80	Strng	Good	6	26	**59**
49860	LA FOLLETTE ST	DS@167S E NOB HILL BLVD	DS@619E E NOB HILL BLVD	Local	Asphalt	20	452	50	1,055	88	69	60	Mod	V Good	5	6	**81**
49900	LA FOLLETTE ST	DS@619E E NOB HILL BLVD	S FAIR AVE	Local	Asphalt	20	325	36	758	85	66	60	Mod	V Good	4	11	**78**
43590	LA SALLE ST	S 9TH ST	S FAIR AVE	Local	Asphalt	24	497	66	1,392	77	57	60	Mod	V Good	8	16	**69**
42860	LA SALLE ST	S 6TH ST	DS@164E S 6TH ST	Local	Asphalt	32	164	29	612	86	68	60	Mod	V Good	0	14	**79**
42890	LA SALLE ST	DS@164E S 6TH ST	S 7TH ST	Local	Asphalt	33	167	31	643	77	58	60	Mod	V Good	8	15	**70**
42900	LA SALLE ST	S 7TH ST	DS@167E S 7TH ST	Local	Asphalt	32	167	30	623	80	61	60	Mod	V Good	6	14	**73**
42920	LA SALLE ST	DS@167E S 7TH ST	S 8TH ST	Local	Asphalt	33	166	30	639	77	57	60	Mod	V Good	10	13	**69.6**
42930	LA SALLE ST	S 8TH ST	DS@167E S 8TH ST	Local	Asphalt	32	167	30	623	78	59	60	Mod	V Good	7	14	**71**
42990	LA SALLE ST	DS@167E S 8TH ST	S 9TH ST	Local	Asphalt	31	178	31	644	62	31	80	Strng	Fair	16	22	**51**
42820	LA SALLE ST	S NACHES AVE	DS@164E S NACHES AVE	Local	Asphalt	23	164	21	440	73	53	80	Strng	Good	4	23	**65**
42840	LA SALLE ST	DS@164E S NACHES AVE	S 6TH ST	Local	Asphalt	22	166	20	426	79	60	80	Strng	V Good	1	20	**72**
34770	LABAN AVE	STANLEY BLVD	LESTER AVE	Local	Asphalt	25	155	22	452	85	67	60	Mod	V Good	0	15	**78.5**
34660	LABAN AVE	LESTER AVE	UNKNOWN - 36090	Local	Asphalt	24	156	21	437	71	49	80	Strng	Good	9	19	**63**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
34670	LABAN AVE	UNKNOWN - 36090	ARTHUR BLVD	Local	Asphalt	20	115	13	268	66	54	60	Mod	Good	14	20	**60.7**
34690	LABAN AVE	ARTHUR BLVD	HENRY AVE	Local	Asphalt	20	157	17	366	63	52	60	Mod	Fair	17	20	**58**
69610	LAKESIDE CT	NORTH END	FRUITVALE BLVD	Local	Asphalt	26	703	102	2132	39	13	80	Strng	Poor	35	26	**29.7**
45860	LANAI DR	S 53RD AVE	WEST END	Local	Asphalt	32	334	59	1,247	68	62	80	Strng	Good	0	32	**65**
46740	LANDON AVE	W ARLINGTON ST	STEWART ST	Local	Asphalt	32	659	117	2460	77	57	80	Strng	V Good	4	19	**69.8**
49170	LANDON AVE	STEWART ST	W NOB HILL BLVD	Local	Asphalt	32	674	120	2516	45	38	60	Mod	Marginal	35	20	**41.4**
50560	LANDON AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	31	660	114	2387	67	50	80	Strng	Good	8	25	**60.1**
52800	LANDON AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	31	666	115	2,409	55	49	60	Mod	Fair	24	21	**52**
54720	LANDON AVE	W VIOLA AVE	W LOGAN AVE	Local	Asphalt	31	656	113	2373	51	47	80	Strng	Marginal	14	35	**48.8**
56370	LANDON AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	31	671	116	2427	33	41	80	Strng	Poor	31	36	**35.1**
56870	LANDON AVE	W MEAD AVE	DS@186S W MEAD AVE	Local	Asphalt	25	186	26	543	79	60	60	Mod	V Good	4	17	**71.7**
57850	LANDON AVE	DS@186S W MEAD AVE	W KING ST	Local	Asphalt	25	474	66	1383	100	90	60	Mod	Excellent	0	0	**95.6**
59040	LANDON AVE	W KING ST	W PIERCE ST	Local	Asphalt	25	672	93	1960	86	67	60	Mod	V Good	3	11	**78.8**
55130	LAURA LN	S 40TH AVE	DS@786W S 40TH AVE	Local	Asphalt	32	786	140	2934	67	49	80	Strng	Good	8	25	**60.1**
55000	LAURA LN	S 42ND AVE	DS@289S S 42ND AVE	Local	Asphalt	33	289	53	1113	70	54	80	Strng	Good	4	26	**64.2**
6940	LAUREL ST	N 6TH AVE	DS@346W N 6TH AVE	Local	Asphalt	26	346	50	1050	78	76	60	Mod	V Good	15	7	**76.6**
6950	LAUREL ST	DS@346W N 6TH AVE	WEST END	Local	Asphalt	24	315	42	882	47	75	80	Strng	Fair	5	31	**55.2**
6970	LAUREL ST	N 14TH AVE	N 15TH AVE	Local	Asphalt	22	319	39	819	27	61	80	Strng	Poor	29	30	**37.5**
40750	LEANN PL	NORTH END	DS@121S NORTH END	Local	Asphalt	48	121	32	679	52	31	80	Strng	Marginal	14	34	**43.8**
41980	LEANN PL	DS@121S NORTH END	WEBSTER AVE	Local	Asphalt	32	187	33	698	61	53	80	Strng	Fair	5	34	**57**
70300	LEDWICH AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	32	786	140	2934	48	37	80	Strng	Marginal	26	27	**42.9**
52850	LEDWICH AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	32	666	118	2486	72	49	80	Strng	Good	9	19	**63.2**
54890	LEDWICH AVE	W VIOLA AVE	W LOGAN AVE	Local	Asphalt	32	659	117	2,460	68	52	60	Mod	Good	14	18	**61**
56420	LEDWICH AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	32	673	120	2513	79	60	60	Mod	V Good	5	16	**71.7**
57890	LEDWICH AVE	W MEAD AVE	W KING ST	Local	Asphalt	30	663	111	2321	81	73	60	Mod	V Good	8	11	**77.5**
59080	LEDWICH AVE	W KING ST	W PIERCE ST	Local	Asphalt	30	665	111	2328	84	65	60	Mod	V Good	4	12	**77**
34390	LESTER AVE	W CHESTNUT AVE	LABAN AVE	Local	Asphalt	23	335	43	899	82	63	60	Mod	V Good	7	12	**74.8**
20660	LEWIS AVE	W LINCOLN AVE	DS@161N W LINCOLN AVE	Local	Asphalt	28	161	25	526	67	41	80	Strng	Fair	6	27	**57**
19380	LEWIS AVE	DS@161N W LINCOLN AVE	GARFIELD AVE	Local	Asphalt	28	163	25	532	81	62	80	Strng	V Good	0	19	**73.7**
18920	LEWIS AVE	GARFIELD AVE	DS@166N GARFIELD AVE	Local	Asphalt	28	166	26	542	65	38	80	Strng	Fair	1	34	**55.5**
17770	LEWIS AVE	DS@166N GARFIELD AVE	MCKINLEY AVE	Local	Asphalt	28	164	26	536	65	73	80	Strng	Good	5	29	**66.9**
17240	LEWIS AVE	MCKINLEY AVE	DS@167N MCKINLEY AVE	Local	Asphalt	23	167	21	448	68	43	80	Strng	Fair	8	24	**58.8**
16450	LEWIS AVE	DS@167N MCKINLEY AVE	ROOSEVELT AVE	Local	Asphalt	23	162	21	435	70	54	80	Strng	Good	4	26	**63.7**
16010	LEWIS AVE	ROOSEVELT AVE	DS@166N ROOSEVELT AVE	Local	Asphalt	25	166	23	484	35	30	80	Strng	Poor	30	35	**33**
15030	LEWIS AVE	DS@166N ROOSEVELT AVE	CHERRY AVE	Local	Asphalt	24	175	23	490	44	41	80	Strng	Marginal	21	35	**42**
14400	LEWIS AVE	CHERRY AVE	DS@169N CHERRY AVE	Local	Asphalt	25	169	23	493	32	36	80	Strng	Poor	33	35	**31.9**
13420	LEWIS AVE	DS@169N CHERRY AVE	FAIRBANKS AVE	Local	Asphalt	23	163	21	437	40	45	80	Strng	Marginal	25	35	**41**
12930	LEWIS AVE	FAIRBANKS AVE	DS@164N FAIRBANKS AVE	Local	Asphalt	25	164	23	478	66	39	80	Strng	Fair	0	34	**56**
12440	LEWIS AVE	DS@164N FAIRBANKS AVE	JEROME AVE	Local	Asphalt	25	163	23	475	59	56	80	Strng	Fair	7	34	**57**
23190	LEWIS AVE	FOLSOM AVE	DS@173N FOLSOM AVE	Local	Asphalt	23	173	22	464	37	29	80	Strng	Poor	21	43	**33**
22440	LEWIS AVE	DS@173N FOLSOM AVE	JEFFERSON AVE	Local	Asphalt	23	170	22	456	45	28	80	Strng	Poor	27	28	**38**
21850	LEWIS AVE	JEFFERSON AVE	DS@160N JEFFERSON AVE	Local	Asphalt	24	160	21	448	49	52	80	Strng	Marginal	11	40	**49**
21170	LEWIS AVE	DS@160N JEFFERSON AVE	W LINCOLN AVE	Local	Asphalt	24	163	22	456	49	39	80	Strng	Marginal	18	33	**45**
53450	LILA AVE	S 22ND AVE	WEST END	Local	Asphalt	36	344	70	1,464	52	24	80	Strng	Marginal	13	34	**42**
53500	LILA AVE	S 24TH AVE	LILA PL	Local	Asphalt	32	190	34	709	68	45	80	Strng	Good	0	32	**59.3**
53470	LILA AVE	LILA PL	S 25TH AVE	Local	Asphalt	32	254	45	948	66	65	60	Mod	Good	11	23	**64.7**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
53430	LILA AVE	S 25TH AVE	HAMILTON AVE	Local	Asphalt	33	250	46	963	63	64	80	Strng	Good	11	26	**62.2**
53390	LILA AVE	HAMILTON AVE	S 26TH AVE	Local	Asphalt	32	251	45	937	60	54	80	Strng	Fair	9	32	**56.6**
53370	LILA AVE	S 26TH AVE	KARR AVE	Local	Asphalt	32	249	44	930	58	44	80	Strng	Fair	5	36	**53**
53520	LILA AVE	S 29TH AVE	DS@198W S 29TH AVE	Local	Asphalt	32	198	35	739	66	54	80	Strng	Good	10	24	**61**
53480	LILA AVE	DS@198W S 29TH AVE	S 31ST AVE	Local	Asphalt	32	297	53	1,109	71	59	80	Strng	Good	5	25	**66**
53410	LILA AVE	S 31ST AVE	S 32ND AVE	Local	Asphalt	32	255	45	952	69	46	60	Mod	Good	14	16	**60**
52210	LILA PL	NORTH END	DS@175S NORTH END	Local	Asphalt	39	175	38	806	34	36	80	Strng	Poor	36	30	**33.7**
53460	LILA PL	DS@175S NORTH END	LILA AVE	Local	Asphalt	32	241	43	900	34	66	80	Strng	Marginal	28	38	**43.8**
12420	LINCOLN AVE	N 8TH ST	DS@192E N 8TH ST	Truck Route	Asphalt	32	192	34	717	60	82	60	Mod	Good	18	22	**66.4**
12310	LINCOLN AVE	DS@192E N 8TH ST	N 9TH ST	Truck Route	Asphalt	32	186	33	694	38	69	60	Mod	Marginal	37	26	**46.7**
12140	LINCOLN AVE	N 9TH ST	DS@190E N 9TH ST	Truck Route	Asphalt	30	190	32	665	90	81	60	Mod	Excellent	0	10	**86.2**
69800	LINCOLN AVE	DS@190E N 9TH ST	N 10TH ST	Truck Route	Asphalt	30	181	30	634	96	87	60	Mod	Excellent	0	4	**92**
13140	LINCOLN AVE	N 6TH ST	DS@200E N 6TH ST	Truck Route	Asphalt	60	200	67	1400	72	93	60	Mod	V Good	6	22	**78.3**
13040	LINCOLN AVE	DS@200E N 6TH ST	N 7TH ST	Truck Route	Asphalt	60	190	63	1330	75	95	60	Mod	V Good	5	21	**80.7**
12680	LINCOLN AVE	N 7TH ST	DS@192E N 7TH ST	Truck Route	Asphalt	60	192	64	1344	78	100	60	Mod	Excellent	0	22	**84.9**
12540	LINCOLN AVE	DS@192E N 7TH ST	N 8TH ST	Truck Route	Asphalt	60	189	63	1323	90	70	60	Mod	V Good	0	10	**82.7**
16130	LINCOLN AVE	N 1ST ST	DS@201E N 1ST ST	Truck Route	Asphalt	59	201	66	1384	75	66	60	Mod	V Good	7	18	**71.1**
15830	LINCOLN AVE	DS@201E N 1ST ST	N 2ND ST	Truck Route	Asphalt	42	196	46	960	83	89	60	Mod	Excellent	6	10	**84.7**
15540	LINCOLN AVE	N 2ND ST	DS@204E N 2ND ST	Truck Route	Asphalt	40	204	45	952	77	84	60	Mod	V Good	9	14	**79**
15110	LINCOLN AVE	DS@204E N 2ND ST	N 3RD ST	Truck Route	Asphalt	40	197	44	919	79	79	60	Mod	V Good	9	12	**78**
14840	LINCOLN AVE	N 3RD ST	DS@201E N 3RD ST	Truck Route	Asphalt	43	201	48	1,008	84	74	60	Mod	V Good	9	7	**80**
14780	LINCOLN AVE	DS@201E N 3RD ST	N 4TH ST	Truck Route	Asphalt	49	199	54	1,138	84	69	60	Mod	V Good	0	16	**78**
14640	LINCOLN AVE	N 4TH ST	DS@201E N 4TH ST	Truck Route	Asphalt	59	201	66	1,384	93	90	60	Mod	Excellent	0	7	**91**
13780	LINCOLN AVE	DS@201E N 4TH ST	N NACHES AVE	Truck Route	Asphalt	60	221	74	1,547	85	93	60	Mod	Excellent	0	16	**87**
13600	LINCOLN AVE	N NACHES AVE	DS@219E N NACHES AVE	Truck Route	Asphalt	60	219	73	1533	82	99	60	Mod	Excellent	0	18	**87.1**
13230	LINCOLN AVE	DS@219E N NACHES AVE	N 6TH ST	Truck Route	Asphalt	59	202	66	1,390	82	88	60	Mod	V Good	0	18	**83**
16520	LINCOLN AVE	N FRONT ST	DS@193E N FRONT ST	Truck Route	Asphalt	36	193	39	811	86	79	60	Mod	V Good	0	14	**83**
16280	LINCOLN AVE	DS@193E N FRONT ST	N 1ST ST	Truck Route	Asphalt	36	196	39	823	77	57	80	Strng	Good	3	20	**69**
16740	LINCOLN AVE	E LINCOLN AVE	DS@223W E LINCOLN AVE	Truck Route	Asphalt	38	223	47	989	99	90	60	Mod	Excellent	0	1	**95**
17260	LINCOLN AVE	DS@223W E LINCOLN AVE	N 1ST AVE	Truck Route	Asphalt	39	314	68	1,429	56	49	80	Strng	Fair	9	35	**53**
17710	LINCOLN AVE	N 1ST AVE	N 2ND AVE	Truck Route	Asphalt	48	393	105	2,201	81	81	60	Mod	V Good	10	9	**80**
18460	LINCOLN AVE	N 2ND AVE	N 3RD AVE	Truck Route	Asphalt	49	401	109	2292	91	86	60	Mod	Excellent	0	9	**88.6**
18900	LINCOLN AVE	N 3RD AVE	DS@200W N 3RD AVE	Truck Route	Asphalt	49	200	54	1143	85	90	60	Mod	Excellent	0	15	**85.5**
19080	LINCOLN AVE	DS@200W N 3RD AVE	N 4TH AVE	Truck Route	Asphalt	49	198	54	1132	91	88	60	Mod	Excellent	0	9	**89.2**
19190	LINCOLN AVE	N 4TH AVE	DS@200W N 4TH AVE	Truck Route	Asphalt	49	200	54	1,143	93	88	60	Mod	Excellent	0	7	**91**
19520	LINCOLN AVE	DS@200W N 4TH AVE	N 5TH AVE	Truck Route	Asphalt	51	202	57	1,202	87	68	60	Mod	V Good	6	7	**80**
19910	LINCOLN AVE	N 5TH AVE	DS@201W N 5TH AVE	Truck Route	Asphalt	47	201	52	1102	92	84	60	Mod	Excellent	0	8	**88.6**
20540	LINCOLN AVE	DS@201W N 5TH AVE	N 6TH AVE	Truck Route	Asphalt	49	203	55	1,160	96	87	60	Mod	Excellent	0	4	**92**
20560	LINCOLN AVE	N 6TH AVE	DS@154W N 6TH AVE	Truck Route	Asphalt	44	154	38	791	93	79	60	Mod	Excellent	0	7	**87.3**
20500	LINCOLN AVE	DS@154W N 6TH AVE	PIERCE AVE	Truck Route	Asphalt	43	98	23	492	75	72	60	Mod	V Good	8	17	**73**
20820	LINCOLN AVE	W LINCOLN AVE	PIERCE AVE	Truck Route	Asphalt	26	161	23	488	72	61	80	Strng	Good	5	23	**68**
20520	LINCOLN AVE	PIERCE AVE	OREGON AVE	Truck Route	Asphalt	41	410	93	1961	78	81	60	Mod	V Good	7	15	**78.3**
20580	LINCOLN AVE	OREGON AVE	CUSTER AVE	Truck Route	Asphalt	41	470	107	2,248	75	77	60	Mod	V Good	5	20	**75**
20620	LINCOLN AVE	CUSTER AVE	CLARKE AVE	Truck Route	Asphalt	40	458	102	2,137	77	80	60	Mod	V Good	5	18	**78**
20650	LINCOLN AVE	CLARKE AVE	LEWIS AVE	Truck Route	Asphalt	43	451	108	2,263	83	91	60	Mod	Excellent	0	17	**85**
20670	LINCOLN AVE	LEWIS AVE	LEWIS AVE	Truck Route	Asphalt	41	120	27	574	77	66	60	Mod	V Good	3	20	**72**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
20690	LINCOLN AVE	LEWIS AVE	N 16TH AVE	Truck Route	Asphalt	44	681	166	3496	72	74	60	Mod	V Good	12	16	**72.1**
20710	LINCOLN AVE	N 16TH AVE	DS@338W N 16TH AVE	Minor Arterial	Asphalt	55	338	103	2169	40	56	60	Mod	Marginal	33	27	**43.5**
20680	LINCOLN AVE	DS@338W N 16TH AVE	DS@552W N 16TH AVE	Minor Arterial	Asphalt	54	214	64	1,348	56	76	60	Mod	Good	24	20	**61**
20640	LINCOLN AVE	DS@552W N 16TH AVE	N 18TH AVE	Minor Arterial	Asphalt	48	174	46	974	47	62	60	Mod	Fair	30	23	**50.3**
20610	LINCOLN AVE	N 18TH AVE	DS@362W N 18TH AVE	Minor Arterial	Asphalt	51	362	103	2,154	44	64	80	Strng	Fair	20	36	**49**
20570	LINCOLN AVE	DS@362W N 18TH AVE	N 20TH AVE	Minor Arterial	Asphalt	49	237	65	1355	45	56	60	Mod	Marginal	28	27	**46.7**
20490	LINCOLN AVE	N 20TH AVE	DS@459W N 20TH AVE	Minor Arterial	Asphalt	48	459	122	2,570	50	71	60	Mod	Fair	27	23	**55**
20460	LINCOLN AVE	DS@459W N 20TH AVE	DS@659W N 20TH AVE	Minor Arterial	Asphalt	50	199	55	1161	54	73	60	Mod	Good	27	19	**59.1**
20450	LINCOLN AVE	DS@659W N 20TH AVE	N 23RD AVE	Minor Arterial	Asphalt	50	331	92	1931	62	78	60	Mod	Good	22	15	**66.6**
20430	LINCOLN AVE	N 23RD AVE	N 24TH AVE	Minor Arterial	Asphalt	49	326	89	1864	71	71	60	Mod	V Good	13	15	**70.2**
20410	LINCOLN AVE	N 24TH AVE	N 25TH AVE	Minor Arterial	Asphalt	38	336	71	1490	86	67	60	Mod	V Good	5	10	**78.8**
20370	LINCOLN AVE	N 25TH AVE	N 26TH AVE	Minor Arterial	Asphalt	37	330	68	1425	88	87	60	Mod	Excellent	4	9	**86.7**
20360	LINCOLN AVE	N 26TH AVE	N 27TH AVE	Minor Arterial	Asphalt	38	332	70	1472	91	86	60	Mod	Excellent	0	9	**88.1**
20340	LINCOLN AVE	N 27TH AVE	N 28TH AVE	Minor Arterial	Asphalt	37	332	68	1433	79	77	60	Mod	V Good	5	17	**77.3**
20320	LINCOLN AVE	N 28TH AVE	N 29TH AVE	Minor Arterial	Asphalt	35	329	64	1343	82	69	60	Mod	V Good	5	13	**77.1**
20310	LINCOLN AVE	N 29TH AVE	N 30TH AVE	Minor Arterial	Asphalt	37	279	57	1,204	92	78	60	Mod	Excellent	0	8	**87**
20270	LINCOLN AVE	N 30TH AVE	N 30TH AVE	Minor Arterial	Asphalt	35	53	10	216	88	69	60	Mod	V Good	3	8	**81**
20290	LINCOLN AVE	N 30TH AVE	WYMAN DR	Minor Arterial	Asphalt	38	180	38	798	87	79	60	Mod	V Good	4	8	**83.7**
20260	LINCOLN AVE	WYMAN DR	N 31ST AVE	Minor Arterial	Asphalt	37	149	31	643	90	70	60	Mod	V Good	0	10	**82.7**
20250	LINCOLN AVE	N 31ST AVE	N 32ND AVE	Minor Arterial	Asphalt	38	330	70	1463	84	66	60	Mod	V Good	8	9	**76.8**
20200	LINCOLN AVE	N 32ND AVE	DS@333W N 32ND AVE	Minor Arterial	Asphalt	37	333	68	1437	91	77	60	Mod	Excellent	0	9	**85.3**
20210	LINCOLN AVE	DS@333W N 32ND AVE	N 34TH AVE	Minor Arterial	Asphalt	36	322	64	1352	90	82	60	Mod	Excellent	0	10	**86.5**
20190	LINCOLN AVE	N 34TH AVE	N 35TH AVE	Minor Arterial	Asphalt	37	390	80	1,684	88	78	60	Mod	V Good	4	9	**84**
20110	LINCOLN AVE	N 35TH AVE	N 36TH AVE	Minor Arterial	Asphalt	37	269	55	1,161	91	83	60	Mod	Excellent	5	4	**87**
20050	LINCOLN AVE	N 36TH AVE	N 37TH AVE	Minor Arterial	Asphalt	36	292	58	1,226	92	86	60	Mod	Excellent	0	8	**89**
75510	LINCOLN AVE	N 37TH AVE	N 37TH AVE	Minor Arterial	Asphalt	36	38	8	160	75	77	60	Mod	V Good	0	25	**75**
20030	LINCOLN AVE	N 37TH AVE	EASTVIEW DR	Minor Arterial	Asphalt	38	504	106	2,234	89	87	60	Mod	Excellent	0	11	**87**
73090	LINCOLN AVE	EASTVIEW DR	N 39TH AVE	Minor Arterial	Asphalt	37	72	15	311	80	89	60	Mod	V Good	0	20	**82**
73080	LINCOLN AVE	N 39TH AVE	SUNRISE PARK DR	Minor Arterial	Asphalt	37	204	42	881	87	83	60	Mod	Excellent	4	9	**85**
20000	LINCOLN AVE	SUNRISE PARK DR	N 40TH AVE	Minor Arterial	Asphalt	37	206	42	889	82	64	60	Mod	V Good	13	5	**75**
20080	LINCOLN AVE	N 40TH AVE	N 41ST AVE	Major Collector	Asphalt	37	333	68	1,437	66	56	80	Strng	Good	11	23	**61**
20090	LINCOLN AVE	N 41ST AVE	N 42ND AVE	Major Collector	Asphalt	36	334	67	1,403	67	85	60	Mod	V Good	4	28	**72**
20070	LINCOLN AVE	N 42ND AVE	DS@327W N 42ND AVE	Major Collector	Asphalt	36	327	65	1,373	63	80	80	Strng	Good	5	32	**68**
20150	LINCOLN AVE	DS@327W N 42ND AVE	N 44TH AVE	Major Collector	Asphalt	35	328	64	1,339	62	88	60	Mod	V Good	8	30	**70**
20170	LINCOLN AVE	N 44TH AVE	DS@313W N 44TH AVE	Major Collector	Asphalt	36	313	63	1,315	54	84	80	Strng	Good	10	35	**63**
20120	LINCOLN AVE	DS@313W N 44TH AVE	N 46TH AVE	Major Collector	Asphalt	35	347	67	1,417	52	69	80	Strng	Fair	15	32	**57**
20220	LINCOLN AVE	N 46TH AVE	DS@281W N 46TH AVE	Major Collector	Asphalt	31	281	48	1,016	68	65	60	Mod	Good	8	24	**66**
20230	LINCOLN AVE	DS@281W N 46TH AVE	DS@841W N 46TH AVE	Major Collector	Asphalt	28	561	87	1,833	71	70	60	Mod	V Good	10	19	**69**
18750	LINCOLN AVE	DS@841W N 46TH AVE	N 49TH AVE	Major Collector	Asphalt	29	213	34	721	53	49	60	Mod	Fair	26	21	**51**
19120	LINCOLN AVE	N 49TH AVE	DS@401W N 49TH AVE	Major Collector	Asphalt	28	401	62	1,310	70	77	60	Mod	V Good	14	16	**72**
19970	LINCOLN AVE	DS@401W N 49TH AVE	BITTERROOT WY	Major Collector	Asphalt	29	348	56	1,177	72	59	60	Mod	Good	10	17	**67**
19980	LINCOLN AVE	BITTERROOT WY	N 52ND AVE	Major Collector	Asphalt	30	343	57	1,201	55	74	60	Mod	Good	16	29	**60**
19950	LINCOLN AVE	N 52ND AVE	DS@341W N 52ND AVE	Major Collector	Asphalt	25	341	47	995	58	74	80	Strng	Good	8	34	**62**
19960	LINCOLN AVE	DS@341W N 52ND AVE	DS@873W N 52ND AVE	Major Collector	Asphalt	28	532	83	1738	61	78	60	Mod	Good	14	25	**65.7**
19880	LINCOLN AVE	DS@873W N 52ND AVE	N 55TH AVE	Major Collector	Asphalt	27	297	45	936	48	62	60	Mod	Fair	27	25	**51.2**
19840	LINCOLN AVE	N 55TH AVE	N 56TH AVE	Major Collector	Asphalt	26	297	43	901	65	46	80	Strng	Fair	14	21	**58**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
19820	LINCOLN AVE	N 56TH AVE	N 57TH AVE	Major Collector	Asphalt	25	340	47	992	56	52	60	Mod	Fair	24	20	**54**
19760	LINCOLN AVE	N 57TH AVE	N 57TH AVE	Major Collector	Asphalt	30	82	14	287	98	89	60	Mod	Excellent	0	2	**94**
19740	LINCOLN AVE	N 57TH AVE	N 58TH AVE	Major Collector	Asphalt	29	246	40	832	99	90	60	Mod	Excellent	0	1	**95**
19710	LINCOLN AVE	N 58TH AVE	N 58TH AVE	Major Collector	Asphalt	26	184	27	558	98	89	60	Mod	Excellent	0	3	**94**
19670	LINCOLN AVE	N 58TH AVE	DS@179W N 58TH AVE	Major Collector	Asphalt	28	179	28	585	98	89	60	Mod	Excellent	0	2	**94**
19640	LINCOLN AVE	DS@179W N 58TH AVE	N 60TH AVE	Major Collector	Asphalt	27	348	52	1096	98	89	60	Mod	Excellent	0	3	**93.6**
19630	LINCOLN AVE	N 60TH AVE	DS@328W N 60TH AVE	Major Collector	Asphalt	36	328	66	1378	31	59	60	Mod	Marginal	37	32	**38.7**
19600	LINCOLN AVE	DS@328W N 60TH AVE	N 61ST AVE	Major Collector	Asphalt	35	150	29	613	28	64	60	Mod	Poor	41	31	**38.7**
19580	LINCOLN AVE	N 61ST AVE	N 62ND AVE	Major Collector	Asphalt	30	334	56	1,169	33	50	80	Strng	Poor	31	36	**38**
19560	LINCOLN AVE	N 62ND AVE	N 63RD AVE	Major Collector	Asphalt	32	171	30	638	36	53	80	Strng	Marginal	23	41	**41**
19540	LINCOLN AVE	N 63RD AVE	N 63RD AVE	Major Collector	Asphalt	34	122	23	484	52	67	80	Strng	Fair	17	31	**56**
19510	LINCOLN AVE	N 63RD AVE	N 64TH AVE	Major Collector	Asphalt	25	344	48	1,003	32	72	80	Strng	Marginal	29	39	**44**
19480	LINCOLN AVE	N 64TH AVE	DS@195W N 64TH AVE	Major Collector	Asphalt	26	195	28	592	51	72	80	Strng	Fair	15	34	**57**
19430	LINCOLN AVE	DS@195W N 64TH AVE	N 66TH AVE	Major Collector	Asphalt	19	327	35	725	42	69	80	Strng	Fair	21	37	**50**
19420	LINCOLN AVE	N 66TH AVE	APPLEVIEW RD	Local	Asphalt	20	525	58	1,225	67	46	80	Strng	Fair	5	28	**59**
19360	LINCOLN AVE	APPLEVIEW RD	N 68TH AVE	Local	Asphalt	25	302	42	881	75	55	80	Strng	Good	2	23	**68**
19330	LINCOLN AVE	N 68TH AVE	N 69TH AVE	Local	Asphalt	27	175	26	551	67	50	80	Strng	Good	11	22	**60**
19300	LINCOLN AVE	N 69TH AVE	N 71ST AVE	Local	Asphalt	19	656	69	1,454	55	46	80	Strng	Fair	16	28	**51**
19250	LINCOLN AVE	N 71ST AVE	WEST END	Local	Asphalt	14	152	12	248	26	17	80	Strng	V Poor	40	34	**22**
19270	LINCOLN AVE	N 74TH AVE	N 76TH AVE	Local	Asphalt	30	666	111	2,331	78	67	60	Mod	V Good	4	19	**73**
19240	LINCOLN AVE	N 76TH AVE	POPLAR VIEW WY	Local	Asphalt	29	432	70	1,462	67	77	60	Mod	V Good	10	23	**69**
69960	LINCOLN AVE	POPLAR VIEW WY	SUNSET AVE	Local	Asphalt	28	144	22	470	73	61	80	Strng	Good	0	27	**68**
20800	LINCOLN ESTATES DR	N 73RD AVE	N 74TH AVE	Local	Asphalt	32	400	71	1493	60	57	80	Strng	Fair	5	35	**58**
42360	LINDGREN DR	S 70TH AVE	S 72ND AVE	Local	Asphalt	32	510	91	1904	74	71	60	Mod	V Good	2	24	**72.3**
55270	LINDY LN	S 1ST ST	DS@393E S 1ST ST	Local	Asphalt	27	393	59	1238	78	59	60	Mod	V Good	4	18	**71.1**
55320	LINDY LN	DS@393E S 1ST ST	S FAIR AVE	Local	Asphalt	29	731	118	2473	67	63	60	Mod	Good	14	19	**64.5**
54930	LOGAN AVE	VOELKER AVE	DS@155W VOELKER AVE	Local	Asphalt	29	155	25	524	72	50	80	Strng	Good	9	19	**64**
54910	LOGAN AVE	DS@155W VOELKER AVE	LEDWICH AVE	Local	Asphalt	29	178	29	602	80	61	60	Mod	V Good	9	11	**73**
54900	LOGAN AVE	LEDWICH AVE	ROCK AVE	Local	Asphalt	29	330	53	1117	72	50	60	Mod	Good	12	16	**63.7**
54860	LOGAN AVE	ROCK AVE	DS@163W ROCK AVE	Local	Asphalt	30	163	27	571	82	63	60	Mod	V Good	0	19	**74.4**
54830	LOGAN AVE	DS@163W ROCK AVE	LANDON AVE	Local	Asphalt	28	163	25	532	82	64	60	Mod	V Good	0	18	**75.2**
54730	LOGAN AVE	LANDON AVE	S 1ST AVE	Local	Asphalt	30	333	56	1,166	76	56	60	Mod	Good	7	17	**69**
54690	LOGAN AVE	S 1ST AVE	S 2ND AVE	Local	Asphalt	30	331	55	1,159	60	47	80	Strng	Fair	17	24	**54**
54520	LOGAN AVE	S 2ND AVE	S 3RD AVE	Local	Asphalt	22	332	41	852	74	61	80	Strng	Good	5	21	**69**
54530	LOGAN AVE	S 4TH AVE	S 5TH AVE	Local	Asphalt	28	332	52	1,085	65	41	80	Strng	Fair	7	27	**56**
54840	LOGAN AVE	S 5TH AVE	S 6TH AVE	Local	Asphalt	27	332	50	1046	72	50	80	Strng	Good	5	23	**64.2**
54820	LOGAN AVE	S 6TH AVE	CORNELL AVE	Local	Asphalt	29	331	53	1,120	70	47	80	Strng	Good	1	29	**62**
54800	LOGAN AVE	CORNELL AVE	S 7TH AVE	Local	Asphalt	29	321	52	1,086	70	47	80	Strng	Good	2	27	**62**
54780	LOGAN AVE	S 7TH AVE	S 8TH AVE	Local	Asphalt	29	324	52	1096	62	34	80	Strng	Fair	12	26	**51.5**
54670	LOGAN AVE	S 8TH AVE	S 9TH AVE	Local	Asphalt	28	322	50	1052	40	42	80	Strng	Marginal	25	35	**39.9**
54640	LOGAN AVE	S 9TH AVE	S 10TH AVE	Local	Asphalt	29	343	55	1,160	75	55	80	Strng	Good	5	19	**67**
54590	LOGAN AVE	S 10TH AVE	DS@159W S 10TH AVE	Local	Asphalt	29	159	26	538	84	65	60	Mod	V Good	0	16	**77**
54600	LOGAN AVE	DS@159W S 10TH AVE	S 11TH AVE	Local	Asphalt	30	152	25	532	82	63	60	Mod	V Good	0	19	**74**
54620	LOGAN AVE	S 11TH AVE	DS@162W S 11TH AVE	Local	Asphalt	28	162	25	529	76	60	60	Mod	V Good	5	19	**70**
54580	LOGAN AVE	DS@162W S 11TH AVE	PLEASANT AVE	Local	Asphalt	28	166	26	542	45	30	80	Strng	Marginal	20	34	**39**
54560	LOGAN AVE	PLEASANT AVE	QUEEN AVE	Local	Asphalt	28	327	51	1,068	48	30	80	Strng	Marginal	19	33	**41**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
54870	LOGAN AVE	QUEEN AVE	S 12TH AVE	Local	Asphalt	23	334	43	896	72	50	80	Strng	Good	5	23	**64**
54750	LOGAN AVE	S 15TH AVE	S 16TH AVE	Local	Asphalt	19	340	36	754	45	36	80	Strng	Marginal	19	36	**41**
54460	LOGAN AVE	S 20TH AVE	S 21ST AVE	Local	Asphalt	30	329	55	1152	66	39	80	Strng	Fair	8	26	**55.8**
54440	LOGAN AVE	S 21ST AVE	S 22ND AVE	Local	Asphalt	30	336	56	1,176	68	44	80	Strng	Fair	8	24	**59**
54380	LOGAN AVE	S 22ND AVE	S 23RD AVE	Local	Asphalt	30	331	55	1,159	61	43	80	Strng	Fair	14	25	**55**
54310	LOGAN AVE	S 23RD AVE	S 24TH AVE	Local	Asphalt	31	356	61	1,288	74	60	60	Mod	Good	8	18	**68**
54420	LOGAN AVE	CONRAD AVE	S 25TH AVE	Local	Asphalt	29	258	42	873	67	46	80	Strng	Fair	8	26	**59**
54400	LOGAN AVE	S 25TH AVE	HAMILTON AVE	Local	Asphalt	31	255	44	922	68	42	80	Strng	Fair	13	19	**58**
54350	LOGAN AVE	HAMILTON AVE	S 26TH AVE	Local	Asphalt	29	260	42	880	79	60	80	Strng	V Good	0	21	**71.7**
54090	LOGAN AVE	KARR AVE	S 27TH AVE	Local	Asphalt	28	252	39	823	64	42	80	Strng	Fair	4	32	**55.5**
54100	LOGAN AVE	S 27TH AVE	S 28TH AVE	Local	Asphalt	28	251	39	820	55	48	80	Strng	Fair	16	29	**52**
54070	LOGAN AVE	S 28TH AVE	S 29TH AVE	Local	Asphalt	28	200	31	653	50	43	80	Strng	Marginal	22	28	**46.4**
54250	LOGAN AVE	S 29TH AVE	S 30TH AVE	Local	Asphalt	27	236	35	743	63	48	80	Strng	Fair	15	22	**57.1**
54270	LOGAN AVE	S 30TH AVE	S 31ST AVE	Local	Asphalt	27	243	36	765	67	43	80	Strng	Fair	0	33	**57.7**
54950	LOGAN AVE	S 33RD AVE	S 32ND AVE	Local	Asphalt	29	359	58	1,215	59	45	80	Strng	Fair	7	34	**53**
55400	LOGAN AVE	S 34TH AVE	S 35TH PL	Local	Asphalt	33	475	87	1,829	60	44	80	Strng	Fair	11	30	**54**
55340	LOGAN AVE	S 35TH PL	S 36TH AVE	Local	Asphalt	32	218	39	814	68	63	80	Strng	Good	6	26	**65**
54320	LOGAN AVE	S 38TH AVE	S 40TH AVE	Local	Asphalt	21	639	75	1566	57	55	80	Strng	Fair	15	27	**55.5**
54480	LOGAN AVE	S 68TH AVE	S 69TH AVE	Local	Asphalt	29	232	37	785	59	57	80	Strng	Fair	13	29	**57.1**
55210	LOGAN LN	S 36TH AVE	WEST END	Local	Asphalt	38	184	39	813	64	42	80	Strng	Fair	9	27	**56**
54050	LOGAN PL	SE END	MCLEAN DR	Local	Asphalt	42	219	52	1,082	56	46	80	Strng	Fair	15	29	**52**
71640	LONGFIBRE RD	W WASHINGTON AVE	DS@642S W WASHINGTON AVE	Local	Asphalt	30	642	107	2,247	78	59	60	Mod	V Good	4	18	**71**
71630	LONGFIBRE RD	DS@642S W WASHINGTON AVE	DS@1530S W WASHINGTON AVE	Local	Asphalt	42	888	207	4,353	44	47	60	Mod	Marginal	34	22	**44**
74450	LONGFIBRE RD	DS@2516S W WASHINGTON AVE	VALLEY MALL BLVD	Local	Asphalt	39	140	30	637	99	90	60	Mod	Excellent	0	2	**95**
77001	LONGFIBRE RD	DS@1530S W WASHINGTON AVE	DS@2516S W WASHINGTON AVE	Local	Asphalt	42	985	230	4,828	75	81	60	Mod	V Good	3	22	**76**
57000	LOREN AVE	S 18TH AVE	DS@372W S 18TH AVE	Local	Asphalt	24	372	50	1,042	73	52	60	Mod	Good	14	12	**65**
56980	LOREN AVE	DS@372W S 18TH AVE	WEST END	Local	Asphalt	33	260	48	1,001	78	59	60	Mod	V Good	6	16	**71**
56940	LOREN CT	EAST END	S 26TH AVE	Local	Asphalt	24	113	15	316	80	61	80	Strng	V Good	0	20	**72.9**
56890	LOREN CT	EAST END	S 27TH AVE	Local	Asphalt	46	193	49	1027	61	45	80	Strng	Fair	5	34	**54.9**
56830	LOREN CT	S 28TH AVE	NW END	Local	Asphalt	44	164	40	848	69	45	80	Strng	Good	5	26	**60**
56520	LOREN PL	EAST END	S 71ST AVE	Local	Asphalt	31	270	47	977	80	62	60	Mod	V Good	4	17	**73**
74870	LYONS LN	S 75TH AVE	S 76TH AVE	Local	Asphalt	34	373	70	1,480	79	59	60	Mod	V Good	4	17	**71**
76140	LYONS LN	EAST END	S 78TH AVE	Local	Asphalt	42	318	75	1,570	79	59	60	Mod	V Good	4	18	**71**
76150	LYONS LN	S 78TH AVE	DIAMOND WY	Local	Asphalt	31	249	43	901	84	77	60	Mod	V Good	0	16	**81**
76160	LYONS LN	DIAMOND WY	S 79TH AVE	Local	Asphalt	31	250	43	904	92	78	60	Mod	Excellent	0	8	**86.7**
75830	LYONS LN	S 79TH AVE	RUBY WY	Local	Asphalt	30	250	42	875	82	64	60	Mod	V Good	4	14	**75.4**
75820	LYONS LN	RUBY WY	S 80TH AVE	Local	Asphalt	30	163	27	571	85	67	60	Mod	V Good	8	6	**79**
40370	MACLAREN AVE	MEADOW LN	S 88TH AVE	Local	Asphalt	37	429	88	1,852	66	71	80	Strng	Good	0	34	**67**
40580	MACLAREN CT	S 53RD AVE	WEST END	Local	Asphalt	53	178	53	1,105	59	45	80	Strng	Fair	7	34	**54**
42090	MACLAREN ST	S 9TH AVE	DS@211W S 9TH AVE	Local	Asphalt	24	211	28	591	76	56	80	Strng	Good	5	19	**68**
42100	MACLAREN ST	DS@211W S 9TH AVE	S 10TH AVE	Local	Asphalt	23	199	25	534	74	60	60	Mod	Good	10	16	**69**
41950	MACLAREN ST	S 10TH AVE	DS@155W S 10TH AVE	Local	Asphalt	24	155	21	434	81	62	80	Strng	V Good	0	20	**74**
41890	MACLAREN ST	DS@155W S 10TH AVE	S 11TH AVE	Local	Asphalt	31	157	27	568	90	70	60	Mod	V Good	0	10	**83**
41860	MACLAREN ST	S 11TH AVE	DS@153W S 11TH AVE	Local	Asphalt	30	153	26	536	88	69	60	Mod	V Good	0	12	**80.7**
41920	MACLAREN ST	DS@153W S 11TH AVE	PLEASANT AVE	Local	Asphalt	31	168	29	608	77	82	60	Mod	V Good	0	23	**78**
41960	MACLAREN ST	PLEASANT AVE	DS@170W PLEASANT AVE	Local	Asphalt	31	170	29	615	82	63	60	Mod	V Good	5	14	**74.4**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
41970	MACLAREN ST	DS@170W PLEASANT AVE	QUEEN AVE	Local	Asphalt	31	162	28	586	66	61	60	Mod	Good	24	9	**63.5**
41910	MACLAREN ST	QUEEN AVE	DS@166W QUEEN AVE	Local	Asphalt	32	166	30	620	77	58	60	Mod	V Good	11	12	**69.8**
41880	MACLAREN ST	DS@166W QUEEN AVE	S 12TH AVE	Local	Asphalt	32	161	29	601	72	56	60	Mod	Good	16	11	**65.9**
41870	MACLAREN ST	S 12TH AVE	DS@151W S 12TH AVE	Local	Asphalt	32	151	27	564	48	44	60	Mod	Marginal	32	19	**45.6**
41710	MACLAREN ST	DS@151W S 12TH AVE	S 13TH AVE	Local	Asphalt	32	168	30	627	78	59	60	Mod	V Good	10	12	**71.1**
41800	MACLAREN ST	S 13TH AVE	DS@165W S 13TH AVE	Local	Asphalt	31	165	28	597	70	46	80	Strng	Good	10	21	**61**
41810	MACLAREN ST	DS@165W S 13TH AVE	S 14TH AVE	Local	Asphalt	32	164	29	612	69	55	60	Mod	Good	16	16	**62.7**
41780	MACLAREN ST	S 14TH AVE	DS@167W S 14TH AVE	Local	Asphalt	32	167	30	623	73	51	60	Mod	Good	10	17	**64.2**
41740	MACLAREN ST	DS@167W S 14TH AVE	S 15TH AVE	Local	Asphalt	31	166	29	600	77	60	80	Strng	V Good	0	23	**70.9**
41750	MACLAREN ST	S 15TH AVE	DS@164W S 15TH AVE	Local	Asphalt	31	164	28	593	70	47	80	Strng	Good	6	24	**61**
41760	MACLAREN ST	DS@164W S 15TH AVE	S 16TH AVE	Local	Asphalt	32	165	29	616	77	60	60	Mod	V Good	13	10	**70.2**
41700	MACLAREN ST	S 16TH AVE	DS@168W S 16TH AVE	Local	Asphalt	23	168	21	451	46	26	80	Strng	Poor	31	23	**38.4**
41680	MACLAREN ST	DS@168W S 16TH AVE	S 17TH AVE	Local	Asphalt	24	163	22	456	60	48	80	Strng	Fair	13	27	**55**
41670	MACLAREN ST	S 17TH AVE	DS@168W S 17TH AVE	Local	Asphalt	24	168	22	470	44	31	80	Strng	Poor	19	37	**39**
41640	MACLAREN ST	DS@168W S 17TH AVE	S 18TH AVE	Local	Asphalt	24	166	22	465	48	50	80	Strng	Marginal	22	31	**48**
41630	MACLAREN ST	S 18TH AVE	DS@165W S 18TH AVE	Local	Asphalt	24	165	22	462	43	41	80	Strng	Marginal	23	35	**41.1**
41610	MACLAREN ST	DS@165W S 18TH AVE	S 19TH AVE	Local	Asphalt	23	165	21	443	58	57	80	Strng	Fair	14	27	**56.9**
41590	MACLAREN ST	S 19TH AVE	DS@165W S 19TH AVE	Local	Asphalt	24	165	22	462	45	36	80	Strng	Marginal	25	30	**41**
41570	MACLAREN ST	DS@165W S 19TH AVE	S 20TH AVE	Local	Asphalt	24	167	22	468	60	45	80	Strng	Fair	18	22	**54**
41540	MACLAREN ST	EAST END	S 21ST AVE	Local	Asphalt	16	142	13	265	79	60	60	Mod	V Good	9	12	**72**
41530	MACLAREN ST	S 21ST AVE	S 22ND AVE	Local	Asphalt	31	328	56	1,186	58	33	80	Strng	Marginal	14	28	**49**
41470	MACLAREN ST	S 23RD AVE	S 24TH AVE	Local	Asphalt	23	329	42	883	56	50	60	Mod	Fair	22	22	**52**
40560	MACLAREN ST	S 56TH AVE	PARK PL	Local	Asphalt	31	268	46	969	59	49	80	Strng	Fair	13	28	**54**
40540	MACLAREN ST	PARK PL	S 57TH AVE	Local	Asphalt	31	254	44	919	50	49	80	Strng	Marginal	19	31	**48.2**
40700	MACLAREN ST	S 58TH AVE	S 59TH AVE	Local	Asphalt	31	340	59	1,230	66	41	80	Strng	Fair	6	28	**57**
40680	MACLAREN ST	S 59TH AVE	S 60TH AVE	Local	Asphalt	31	332	57	1,201	69	47	80	Strng	Good	6	25	**61**
40660	MACLAREN ST	S 60TH AVE	WEST END	Local	Asphalt	31	133	23	481	17	30	80	Strng	V Poor	46	38	**20.1**
40890	MACLAREN ST	WEST END	S 75TH AVE	Local	Asphalt	30	230	38	805	72	78	60	Mod	V Good	5	23	**73**
40790	MACLAREN WY	S 70TH AVE	S 71ST AVE	Local	Asphalt	27	245	37	772	18	24	80	Strng	V Poor	10	73	**19**
40770	MACLAREN WY	S 71ST AVE	S 72ND AVE	Local	Asphalt	22	300	37	770	53	50	60	Mod	Fair	33	15	**50.6**
12160	MADERA WY	N 43RD AVE	N 44TH AVE	Local	Asphalt	30	240	40	840	66	59	80	Strng	Good	11	23	**63**
4900	MADISON AVE	N 6TH AVE	DS@125W N 6TH AVE	Local	Asphalt	26	125	18	379	65	39	60	Mod	Fair	21	13	**55.2**
4880	MADISON AVE	DS@125W N 6TH AVE	DS@304W N 6TH AVE	Local	Asphalt	27	179	27	564	88	69	60	Mod	V Good	0	12	**81**
4850	MADISON AVE	DS@304W N 6TH AVE	DS@499W N 6TH AVE	Local	Asphalt	30	195	33	683	87	77	60	Mod	V Good	6	7	**83**
4810	MADISON AVE	DS@499W N 6TH AVE	DS@644W N 6TH AVE	Local	Asphalt	26	146	21	443	97	88	60	Mod	Excellent	0	3	**93**
4800	MADISON AVE	DS@644W N 6TH AVE	DS@1423W N 6TH AVE	Local	Asphalt	31	779	134	2,817	86	77	60	Mod	V Good	6	8	**82**
4790	MADISON AVE	DS@1423W N 6TH AVE	N 16TH AVE	Local	Asphalt	33	1,216	223	4,682	87	69	60	Mod	V Good	10	3	**80**
74470	MAGNOLIA CT	NORTH END	MANOR WY	Local	Asphalt	36	419	85	1,776	65	75	60	Mod	Good	8	26	**68**
60280	MANOR WY	EAST END	S 69TH AVE	Local	Asphalt	49	61	17	352	68	51	80	Strng	Good	0	32	**62**
60290	MANOR WY	S 69TH AVE	S 70TH AVE	Local	Asphalt	30	221	37	774	72	70	80	Strng	V Good	0	28	**70**
60310	MANOR WY	S 70TH AVE	MAGNOLIA CT	Local	Asphalt	31	336	58	1,215	76	74	60	Mod	V Good	0	24	**74**
60260	MANOR WY	MAGNOLIA CT	S 71ST AVE	Local	Asphalt	30	225	38	788	73	75	80	Strng	V Good	0	27	**73**
71380	MAPLE ST	WEST END	POWELL ST	Local	Asphalt	25	154	21	449	95	84	60	Mod	Excellent	0	5	**90**
26790	MAPLE ST	POWELL ST	DS@265E POWELL ST	Local	Asphalt	25	265	37	773	43	79	60	Mod	Fair	27	5	**54**
26780	MAPLE ST	DS@265E POWELL ST	CHALMERS ST	Local	Asphalt	25	52	7	152	81	63	60	Mod	V Good	0	19	**74**
27060	MAPLE ST	S FAIR AVE	DS@197E S FAIR AVE	Local	Asphalt	39	197	43	896	75	54	80	Strng	Good	4	22	**67**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
26760	MAPLE ST	DS@197E S FAIR AVE	S 12TH ST	Local	Asphalt	39	180	39	819	85	66	60	Mod	V Good	0	15	**78**
26750	MAPLE ST	S 12TH ST	S 13TH ST	Local	Asphalt	26	189	27	573	81	63	60	Mod	V Good	0	19	**74**
71390	MAPLE ST	S 13TH ST	EAST END	Local	Asphalt	30	745	124	2,608	74	65	80	Strng	V Good	0	26	**70**
30100	MAPLE ST	S 6TH ST	DS@199E S 6TH ST	Local	Asphalt	40	199	44	929	88	69	60	Mod	V Good	2	10	**81**
29940	MAPLE ST	DS@199E S 6TH ST	S 7TH ST	Local	Asphalt	40	192	43	896	83	64	60	Mod	V Good	1	16	**76**
29500	MAPLE ST	S 7TH ST	DS@209E S 7TH ST	Local	Asphalt	39	209	45	951	79	61	80	Strng	V Good	0	21	**72**
29040	MAPLE ST	DS@209E S 7TH ST	S 8TH ST	Local	Asphalt	39	199	43	905	80	65	60	Mod	V Good	0	20	**74.6**
28810	MAPLE ST	S 8TH ST	DS@206E S 8TH ST	Local	Asphalt	40	206	46	961	82	64	60	Mod	V Good	7	11	**75**
28410	MAPLE ST	DS@206E S 8TH ST	S 9TH ST	Local	Asphalt	40	186	41	868	75	57	60	Mod	Good	13	12	**68**
28230	MAPLE ST	S 9TH ST	DS@207E S 9TH ST	Local	Asphalt	40	207	46	966	55	71	80	Strng	Good	1	44	**59**
27930	MAPLE ST	DS@207E S 9TH ST	S 10TH ST	Local	Asphalt	40	200	44	933	85	67	60	Mod	V Good	0	15	**78**
27590	MAPLE ST	S 10TH ST	DS@196E S 10TH ST	Local	Asphalt	39	196	42	892	88	69	60	Mod	V Good	1	11	**81**
27430	MAPLE ST	DS@196E S 10TH ST	S FAIR AVE	Local	Asphalt	40	125	28	583	68	44	80	Strng	Good	11	21	**59**
32080	MAPLE ST	S 3RD ST	DS@199E S 3RD ST	Local	Asphalt	40	199	44	929	75	55	80	Strng	Good	0	25	**68**
31520	MAPLE ST	DS@199E S 3RD ST	S 4TH ST	Local	Asphalt	40	200	44	933	78	68	60	Mod	V Good	4	18	**74**
31350	MAPLE ST	S 4TH ST	DS@200E S 4TH ST	Local	Asphalt	39	200	43	910	84	73	60	Mod	V Good	3	13	**80.1**
31050	MAPLE ST	DS@200E S 4TH ST	S NACHES AVE	Local	Asphalt	40	218	48	1,017	80	61	80	Strng	V Good	0	20	**73**
30600	MAPLE ST	S NACHES AVE	DS@223E S NACHES AVE	Local	Asphalt	39	223	48	1015	68	54	60	Mod	Good	17	15	**62.5**
30380	MAPLE ST	DS@223E S NACHES AVE	S 6TH ST	Local	Asphalt	39	200	43	910	75	54	60	Mod	Good	11	14	**66.6**
33740	MAPLE ST	S 1ST ST	DS@203E S 1ST ST	Local	Asphalt	39	203	44	924	75	59	80	Strng	Good	3	22	**68.9**
33490	MAPLE ST	DS@203E S 1ST ST	S 2ND ST	Local	Asphalt	40	197	44	919	74	53	80	Strng	Good	3	23	**66.4**
32870	MAPLE ST	S 2ND ST	DS@198E S 2ND ST	Local	Asphalt	39	198	43	901	75	55	60	Mod	Good	12	13	**67.8**
32320	MAPLE ST	DS@198E S 2ND ST	S 3RD ST	Local	Asphalt	39	204	44	928	76	56	80	Strng	Good	0	24	**68.5**
34050	MAPLE ST	S FRONT ST	DS@187E S FRONT ST	Local	Asphalt	40	187	42	873	63	48	80	Strng	Fair	11	26	**57.1**
33930	MAPLE ST	DS@187E S FRONT ST	S 1ST ST	Local	Asphalt	40	201	45	938	73	52	80	Strng	Good	0	27	**65.2**
41400	MAREE LN	S 73RD AVE	S 74TH AVE	Local	Asphalt	31	380	65	1374	76	77	60	Mod	V Good	3	21	**75.5**
34260	MARGARET CT	S 89TH AVE	NW END	Local	Asphalt	43	288	68	1433	62	54	80	Strng	Fair	12	26	**58.5**
11420	MARILANE ST	EAST END	DS@560W EAST END	Local	Asphalt	25	560	78	1633	56	57	80	Strng	Fair	13	32	**55.2**
11150	MARILANE ST	DS@560W EAST END	DS@734W EAST END	Local	Asphalt	23	174	22	467	44	43	80	Strng	Marginal	28	28	**42.9**
11280	MARILANE ST	DS@734W EAST END	N 58TH AVE	Local	Asphalt	23	146	19	392	65	58	80	Strng	Good	1	33	**62**
13790	MARTIN LUTHER KING JR BLVD	N 8TH ST	DS@188E N 8TH ST	Truck Route	Asphalt	32	188	33	702	57	77	60	Mod	Good	15	29	**62.5**
13650	MARTIN LUTHER KING JR BLVD	DS@188E N 8TH ST	N 9TH ST	Truck Route	Asphalt	32	188	33	702	48	63	80	Strng	Fair	21	30	**52.3**
13440	MARTIN LUTHER KING JR BLVD	N 9TH ST	DS@192E N 9TH ST	Truck Route	Asphalt	31	192	33	694	52	51	80	Strng	Fair	17	30	**50.6**
13180	MARTIN LUTHER KING JR BLVD	DS@192E N 9TH ST	N 10TH ST	Truck Route	Asphalt	32	193	34	721	46	59	60	Mod	Fair	29	25	**49.1**
13000	MARTIN LUTHER KING JR BLVD	N 10TH ST	N FAIR AVE	Truck Route	Asphalt	30	326	54	1141	80	61	80	Strng	V Good	0	20	**73.1**
15060	MARTIN LUTHER KING JR BLVD	N 6TH ST	DS@197E N 6TH ST	Truck Route	Asphalt	31	197	34	712	90	77	60	Mod	Excellent	4	6	**85.3**
14820	MARTIN LUTHER KING JR BLVD	DS@197E N 6TH ST	N 7TH ST	Truck Route	Asphalt	33	191	35	735	100	90	60	Mod	Excellent	0	0	**96**
14760	MARTIN LUTHER KING JR BLVD	N 7TH ST	DS@190E N 7TH ST	Truck Route	Asphalt	30	190	32	665	96	87	60	Mod	Excellent	0	4	**93**
14660	MARTIN LUTHER KING JR BLVD	DS@190E N 7TH ST	N 8TH ST	Truck Route	Asphalt	33	194	36	747	92	78	60	Mod	Excellent	0	8	**87**
17810	MARTIN LUTHER KING JR BLVD	N 1ST ST	DS@202E N 1ST ST	Truck Route	Asphalt	50	202	56	1,178	86	67	60	Mod	V Good	0	14	**79**
17640	MARTIN LUTHER KING JR BLVD	DS@202E N 1ST ST	N 2ND ST	Truck Route	Asphalt	47	194	51	1064	84	91	60	Mod	Excellent	7	9	**85.8**
17410	MARTIN LUTHER KING JR BLVD	N 2ND ST	DS@206E N 2ND ST	Truck Route	Asphalt	44	206	50	1057	66	68	60	Mod	Good	22	12	**65.7**
17070	MARTIN LUTHER KING JR BLVD	DS@206E N 2ND ST	N 3RD ST	Truck Route	Asphalt	52	200	58	1213	55	75	60	Mod	Good	28	18	**60.4**
16800	MARTIN LUTHER KING JR BLVD	N 3RD ST	DS@202E N 3RD ST	Truck Route	Asphalt	52	202	58	1,225	63	69	60	Mod	Good	20	17	**64**
16620	MARTIN LUTHER KING JR BLVD	DS@202E N 3RD ST	N 4TH ST	Truck Route	Asphalt	51	196	56	1166	64	67	60	Mod	Good	19	17	**64.2**
16320	MARTIN LUTHER KING JR BLVD	N 4TH ST	DS@204E N 4TH ST	Truck Route	Asphalt	40	204	45	952	86	67	60	Mod	V Good	0	14	**79**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
16200	MARTIN LUTHER KING JR BLVD	DS@204E N 4TH ST	N NACHES AVE	Truck Route	Asphalt	40	218	48	1017	97	88	60	Mod	Excellent	0	3	**92.8**
15890	MARTIN LUTHER KING JR BLVD	N NACHES AVE	DS@224E N NACHES AVE	Truck Route	Asphalt	39	224	49	1019	93	85	60	Mod	Excellent	0	7	**89.6**
15520	MARTIN LUTHER KING JR BLVD	DS@224E N NACHES AVE	N 6TH ST	Truck Route	Asphalt	32	197	35	735	95	87	60	Mod	Excellent	0	5	**91**
18730	MARTIN LUTHER KING JR BLVD	N FRONT ST	DS@190E N FRONT ST	Truck Route	Asphalt	42	190	44	931	97	88	60	Mod	Excellent	0	3	**93**
18140	MARTIN LUTHER KING JR BLVD	DS@190E N FRONT ST	N 1ST ST	Truck Route	Asphalt	42	198	46	970	90	70	60	Mod	V Good	0	10	**83**
19010	MARTIN LUTHER KING JR BLVD	E MARTIN LUTHER KING JR BLVD	DS@224W E MARTIN LUTHER KING JR BLVD	Truck Route	Asphalt	35	224	44	915	97	88	60	Mod	Excellent	0	3	**93.4**
19220	MARTIN LUTHER KING JR BLVD	DS@224W E MARTIN LUTHER KING JR BLVD	N 1ST AVE	Truck Route	Asphalt	38	318	67	1,410	90	72	60	Mod	V Good	0	10	**84**
19920	MARTIN LUTHER KING JR BLVD	N 1ST AVE	N 2ND AVE	Truck Route	Asphalt	47	387	101	2,122	81	80	60	Mod	V Good	5	13	**80**
20910	MARTIN LUTHER KING JR BLVD	N 2ND AVE	N 3RD AVE	Truck Route	Asphalt	52	404	117	2,451	79	79	60	Mod	V Good	5	15	**79**
21030	MARTIN LUTHER KING JR BLVD	N 3RD AVE	DS@197W N 3RD AVE	Truck Route	Asphalt	49	197	54	1,126	85	71	60	Mod	V Good	4	11	**79**
21240	MARTIN LUTHER KING JR BLVD	DS@197W N 3RD AVE	N 4TH AVE	Truck Route	Asphalt	51	199	56	1,184	89	79	60	Mod	Excellent	0	11	**85**
21360	MARTIN LUTHER KING JR BLVD	N 4TH AVE	DS@201W N 4TH AVE	Truck Route	Asphalt	50	201	56	1,173	81	84	60	Mod	V Good	0	19	**82**
21760	MARTIN LUTHER KING JR BLVD	DS@201W N 4TH AVE	N 5TH AVE	Truck Route	Asphalt	50	200	56	1,167	84	75	60	Mod	V Good	5	11	**80**
22070	MARTIN LUTHER KING JR BLVD	N 5TH AVE	DS@201W N 5TH AVE	Truck Route	Asphalt	46	201	51	1,079	87	70	60	Mod	V Good	0	13	**81**
22250	MARTIN LUTHER KING JR BLVD	DS@201W N 5TH AVE	N 6TH AVE	Truck Route	Asphalt	44	201	49	1,032	91	74	60	Mod	Excellent	0	9	**85**
22460	MARTIN LUTHER KING JR BLVD	N 6TH AVE	DS@200W N 6TH AVE	Truck Route	Asphalt	39	200	43	910	83	93	60	Mod	Excellent	0	17	**86**
22640	MARTIN LUTHER KING JR BLVD	DS@200W N 6TH AVE	N 7TH AVE	Truck Route	Asphalt	38	137	29	607	96	87	60	Mod	Excellent	0	4	**92**
58050	MARYLAND ST	E MEAD AVE	E KING ST	Local	Asphalt	34	708	134	2808	20	40	80	Strng	Poor	48	32	**25.9**
28300	MARYLIN DR	N 42ND AVE	DS@230W N 42ND AVE	Local	Asphalt	31	230	40	832	38	47	80	Strng	Marginal	30	32	**40**
27680	MARYLIN DR	DS@230W N 42ND AVE	WEST END	Local	Asphalt	37	230	47	997	44	34	80	Strng	Marginal	28	28	**39.6**
12210	MATTHEWS PL	EAST END	N 46TH AVE	Local	Asphalt	35	245	48	1,011	52	38	80	Strng	Marginal	20	28	**46**
22620	MAVIS AVE	N 38TH AVE	WEST END	Local	Asphalt	30	183	31	641	45	27	80	Strng	Poor	25	30	**38**
34130	MCCARGAR ST	S 48TH AVE	PAULSON PL	Local	Asphalt	30	254	42	889	66	46	80	Strng	Fair	14	20	**59**
34140	MCCARGAR ST	PAULSON PL	S 49TH AVE	Local	Asphalt	30	254	42	889	72	57	60	Mod	Good	8	19	**66**
34190	MCCARGAR ST	S 49TH AVE	S 50TH AVE	Local	Asphalt	30	297	50	1040	61	44	80	Strng	Fair	8	30	**54.6**
17160	MCKINLEY AVE	N 6TH AVE	OREGON AVE	Local	Asphalt	31	466	80	1,685	62	48	80	Strng	Fair	16	21	**56**
17190	MCKINLEY AVE	OREGON AVE	CUSTER AVE	Local	Asphalt	30	472	79	1652	61	47	80	Strng	Fair	11	27	**55.8**
17210	MCKINLEY AVE	CUSTER AVE	CLARKE AVE	Local	Asphalt	32	457	81	1,706	52	45	80	Strng	Marginal	11	37	**49**
17230	MCKINLEY AVE	CLARKE AVE	LEWIS AVE	Local	Asphalt	32	451	80	1684	62	58	60	Mod	Good	18	20	**59.3**
17250	MCKINLEY AVE	LEWIS AVE	N 16TH AVE	Local	Asphalt	31	803	138	2904	65	49	60	Mod	Fair	20	15	**58.2**
17130	MCKINLEY AVE	N 16TH AVE	WEST END	Local	Asphalt	34	534	101	2118	79	60	60	Mod	V Good	8	12	**72.1**
17040	MCKINLEY AVE	N 18TH AVE	N 20TH AVE	Local	Asphalt	30	641	107	2244	78	66	60	Mod	V Good	15	8	**73.1**
17110	MCKINLEY AVE	N 22ND AVE	DS@173W N 22ND AVE	Local	Asphalt	27	173	26	545	100	90	60	Mod	Excellent	0	0	**95.6**
17080	MCKINLEY AVE	DS@173W N 22ND AVE	N 23RD AVE	Local	Asphalt	27	151	23	476	85	66	60	Mod	V Good	6	9	**77.8**
16630	MCKINLEY AVE	N 29TH PL	N 30TH AVE	Local	Asphalt	30	180	30	630	60	46	80	Strng	Fair	9	31	**54.6**
53310	MCLEAN DR	S 38TH AVE	DS@332W S 38TH AVE	Local	Asphalt	27	332	50	1046	67	55	80	Strng	Good	10	15	**62.2**
53320	MCLEAN DR	DS@332W S 38TH AVE	S 40TH AVE	Local	Asphalt	29	323	52	1,093	77	62	60	Mod	V Good	7	16	**71**
53620	MCLEAN DR	S 40TH AVE	MCLEAN PL	Local	Asphalt	31	340	59	1230	63	40	80	Strng	Fair	7	30	**54.3**
53720	MCLEAN DR	MCLEAN PL	LOGAN PL	Local	Asphalt	29	89	14	301	66	73	80	Strng	Good	0	34	**67.6**
53940	MCLEAN DR	LOGAN PL	S 42ND AVE	Local	Asphalt	30	336	56	1,176	66	63	80	Strng	Good	9	25	**64**
53630	MCLEAN PL	NW END	MCLEAN DR	Local	Asphalt	47	136	36	746	59	45	80	Strng	Fair	13	28	**54**
56650	MEAD AVE	S FAIR AVE	S 11TH ST	Minor Arterial	Asphalt	48	325	87	1820	85	66	60	Mod	V Good	9	7	**77.3**
56660	MEAD AVE	S 11TH ST	DS@225E S 11TH ST	Minor Arterial	Asphalt	29	225	36	761	99	90	60	Mod	Excellent	0	1	**94.5**
56680	MEAD AVE	DS@225E S 11TH ST	S 13TH ST	Minor Arterial	Asphalt	29	435	70	1,472	100	90	60	Mod	Excellent	0	0	**95**
56690	MEAD AVE	S 13TH ST	S 14TH ST	Minor Arterial	Asphalt	29	331	53	1120	100	90	60	Mod	Excellent	0	0	**95.4**
56700	MEAD AVE	S 14TH ST	DS@347E S 14TH ST	Minor Arterial	Asphalt	40	347	77	1,619	100	90	60	Mod	Excellent	0	0	**95**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
56710	MEAD AVE	DS@347E S 14TH ST	DS@639E S 14TH ST	Minor Arterial	Asphalt	26	293	42	889	100	90	60	Mod	Excellent	0	0	**95.4**
56720	MEAD AVE	DS@639E S 14TH ST	S 17TH ST	Minor Arterial	Asphalt	25	306	43	893	100	90	60	Mod	Excellent	0	0	**95**
56740	MEAD AVE	S 17TH ST	S 18TH ST	Minor Arterial	Asphalt	25	389	54	1,135	94	83	60	Mod	Excellent	6	0	**89**
56760	MEAD AVE	S 18TH ST	DS@298E S 18TH ST	Minor Arterial	Asphalt	23	298	38	800	70	47	60	Mod	Good	14	16	**61.2**
56770	MEAD AVE	DS@298E S 18TH ST	CALLAHAN LN	Minor Arterial	Asphalt	24	156	21	437	73	51	60	Mod	Good	14	13	**64.5**
56790	MEAD AVE	CALLAHAN LN	S 20TH ST	Minor Arterial	Asphalt	24	206	27	577	74	52	60	Mod	Good	11	16	**65.2**
56810	MEAD AVE	S 20TH ST	RUDKIN RD	Minor Arterial	Asphalt	26	655	95	1987	71	48	60	Mod	Good	13	16	**62.2**
56590	MEAD AVE	S 1ST ST	DS@119E S 1ST ST	Minor Arterial	Asphalt	52	119	34	722	76	55	60	Mod	Good	7	17	**67.6**
56600	MEAD AVE	DS@119E S 1ST ST	DS@215E S 1ST ST	Minor Arterial	Asphalt	52	96	28	582	81	62	80	Strng	V Good	0	19	**74**
56610	MEAD AVE	DS@215E S 1ST ST	DS@499E S 1ST ST	Minor Arterial	Asphalt	51	284	80	1690	50	63	80	Strng	Fair	15	34	**52.9**
56620	MEAD AVE	DS@499E S 1ST ST	DS@731E S 1ST ST	Minor Arterial	Asphalt	52	232	67	1,407	75	76	60	Mod	V Good	4	21	**74**
56640	MEAD AVE	DS@731E S 1ST ST	S FAIR AVE	Minor Arterial	Asphalt	52	211	61	1,280	71	59	60	Mod	Good	14	14	**66**
56540	MEAD AVE	W MEAD AVE	MARYLAND ST	Minor Arterial	Asphalt	48	891	238	4990	76	81	60	Mod	V Good	5	19	**76.8**
56580	MEAD AVE	MARYLAND ST	S 1ST ST	Minor Arterial	Asphalt	49	399	109	2,281	74	53	80	Strng	Good	6	20	**65**
56480	MEAD AVE	E MEAD AVE	PRESSON LN	Minor Arterial	Asphalt	45	889	222	4,667	71	72	60	Mod	V Good	7	21	**70**
56460	MEAD AVE	PRESSON LN	VOELKER AVE	Minor Arterial	Asphalt	45	244	61	1281	73	88	60	Mod	V Good	2	25	**77.1**
56440	MEAD AVE	VOELKER AVE	DS@166W VOELKER AVE	Minor Arterial	Asphalt	45	166	42	872	71	80	60	Mod	V Good	8	22	**73**
56410	MEAD AVE	DS@166W VOELKER AVE	LEDWICH AVE	Minor Arterial	Asphalt	45	180	45	945	73	87	60	Mod	V Good	0	27	**77**
56430	MEAD AVE	LEDWICH AVE	ROCK AVE	Minor Arterial	Asphalt	45	327	82	1,717	73	78	60	Mod	V Good	3	24	**74**
56400	MEAD AVE	ROCK AVE	LANDON AVE	Minor Arterial	Asphalt	44	330	81	1,694	72	76	60	Mod	V Good	4	24	**73**
56380	MEAD AVE	LANDON AVE	S 1ST AVE	Minor Arterial	Asphalt	46	330	84	1,771	69	81	60	Mod	V Good	6	25	**72**
56360	MEAD AVE	S 1ST AVE	S 2ND AVE	Minor Arterial	Asphalt	45	335	84	1,759	74	81	60	Mod	V Good	0	26	**75**
56340	MEAD AVE	S 2ND AVE	S 3RD AVE	Minor Arterial	Asphalt	50	331	92	1931	69	51	80	Strng	Good	8	23	**62**
56020	MEAD AVE	S 3RD AVE	S 4TH AVE	Minor Arterial	Asphalt	50	333	93	1943	73	54	80	Strng	Good	8	18	**65.4**
56110	MEAD AVE	S 4TH AVE	S 5TH AVE	Minor Arterial	Asphalt	42	331	77	1,622	79	83	60	Mod	V Good	5	16	**80**
56130	MEAD AVE	S 5TH AVE	S 6TH AVE	Minor Arterial	Asphalt	40	324	72	1,512	89	87	60	Mod	Excellent	0	11	**88**
56080	MEAD AVE	S 6TH AVE	CORNELL AVE	Minor Arterial	Asphalt	41	339	77	1,622	85	82	60	Mod	V Good	0	15	**83**
56100	MEAD AVE	CORNELL AVE	S 7TH AVE	Minor Arterial	Asphalt	40	322	72	1,503	84	88	60	Mod	Excellent	5	12	**84**
56040	MEAD AVE	S 7TH AVE	S 8TH AVE	Minor Arterial	Asphalt	41	323	74	1,545	89	87	60	Mod	Excellent	0	11	**87**
56060	MEAD AVE	S 8TH AVE	S 9TH AVE	Minor Arterial	Asphalt	41	342	78	1,636	85	81	60	Mod	V Good	5	10	**83**
55960	MEAD AVE	S 9TH AVE	S 10TH AVE	Minor Arterial	Asphalt	40	326	72	1,521	89	93	60	Mod	Excellent	0	11	**89**
55950	MEAD AVE	S 10TH AVE	DS@157W S 10TH AVE	Minor Arterial	Asphalt	42	157	37	769	90	90	60	Mod	Excellent	0	10	**89**
55970	MEAD AVE	DS@157W S 10TH AVE	S 11TH AVE	Minor Arterial	Asphalt	41	145	33	694	84	82	60	Mod	V Good	4	12	**83**
56030	MEAD AVE	S 11TH AVE	DS@165W S 11TH AVE	Minor Arterial	Asphalt	39	165	36	751	40	62	80	Strng	Marginal	25	34	**46**
56140	MEAD AVE	DS@165W S 11TH AVE	PLEASANT AVE	Minor Arterial	Asphalt	40	165	37	770	47	65	80	Strng	Fair	19	35	**51**
56180	MEAD AVE	PLEASANT AVE	PLEASANT AVE	Minor Arterial	Asphalt	40	54	12	252	44	70	60	Mod	Fair	23	34	**50.9**
56200	MEAD AVE	PLEASANT AVE	QUEEN AVE	Minor Arterial	Asphalt	40	294	65	1,372	45	74	60	Mod	Fair	21	35	**53**
56320	MEAD AVE	QUEEN AVE	S 12TH AVE	Minor Arterial	Asphalt	39	316	68	1,438	51	73	80	Strng	Fair	13	35	**57**
75720	MEAD AVE	S 12TH AVE	S 12TH AVE	Minor Arterial	Asphalt	39	24	5	109	30	42	80	Strng	Poor	30	40	**32.8**
56310	MEAD AVE	S 12TH AVE	S 13TH AVE	Minor Arterial	Asphalt	39	288	62	1310	43	62	80	Strng	Marginal	21	36	**47.9**
56290	MEAD AVE	S 13TH AVE	S 14TH AVE	Minor Arterial	Asphalt	39	322	70	1,465	47	69	80	Strng	Fair	16	37	**53**
56220	MEAD AVE	S 14TH AVE	S 15TH AVE	Minor Arterial	Asphalt	40	323	72	1507	39	69	80	Strng	Marginal	24	36	**47.6**
56240	MEAD AVE	S 15TH AVE	S 16TH AVE	Minor Arterial	Asphalt	40	340	76	1,587	46	53	80	Strng	Marginal	16	37	**47**
56260	MEAD AVE	S 16TH AVE	DS@346W S 16TH AVE	Local	Asphalt	21	346	40	848	39	7	80	Strng	Poor	33	28	**27.2**
56270	MEAD AVE	DS@346W S 16TH AVE	S 18TH AVE	Local	Asphalt	16	356	32	665	33	12	80	Strng	Poor	33	33	**25**
56170	MEAD AVE	S 18TH AVE	DS@356W S 18TH AVE	Local	Asphalt	22	356	44	914	45	8	80	Strng	Poor	25	30	**32**



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
55930	MEAD AVE	DS@356W S 18TH AVE	S 20TH AVE	Local	Asphalt	20	265	29	618	31	15	80	Strng	Poor	35	34	**24.8**
55910	MEAD AVE	S 24TH AVE	CONRAD AVE	Other	Asphalt	30	168	28	588	62	45	80	Strng	Fair	13	25	**55.5**
55890	MEAD AVE	CONRAD AVE	S 25TH AVE	Other	Asphalt	30	255	43	893	57	66	60	Mod	Good	20	23	**58.8**
55870	MEAD AVE	S 25TH AVE	HAMILTON AVE	Other	Asphalt	28	256	40	836	50	59	80	Strng	Fair	15	35	**52.3**
55850	MEAD AVE	HAMILTON AVE	S 26TH AVE	Other	Asphalt	30	186	31	651	49	53	80	Strng	Fair	14	37	**49.4**
55830	MEAD AVE	S 26TH AVE	S 26TH AVE	Other	Asphalt	30	75	13	263	44	51	80	Strng	Marginal	26	30	**45**
55820	MEAD AVE	S 26TH AVE	KARR AVE	Other	Asphalt	29	255	41	863	50	41	80	Strng	Marginal	16	34	**46**
55800	MEAD AVE	KARR AVE	S 27TH AVE	Other	Asphalt	27	121	18	381	55	48	80	Strng	Fair	12	33	**52**
55780	MEAD AVE	S 27TH AVE	S 27TH AVE	Other	Asphalt	29	126	20	426	77	60	80	Strng	V Good	0	23	**70.4**
55770	MEAD AVE	S 27TH AVE	S 28TH AVE	Other	Asphalt	27	241	36	759	77	68	80	Strng	V Good	0	23	**74**
55750	MEAD AVE	S 28TH AVE	S 29TH AVE	Other	Asphalt	29	244	39	826	62	66	80	Strng	Good	9	28	**63**
55730	MEAD AVE	S 29TH AVE	S 30TH AVE	Other	Asphalt	28	241	37	787	41	53	80	Strng	Marginal	29	30	**44**
55710	MEAD AVE	S 30TH AVE	S 31ST AVE	Other	Asphalt	28	242	38	791	35	60	60	Mod	Marginal	35	30	**42.3**
55690	MEAD AVE	S 31ST AVE	S 32ND AVE	Other	Asphalt	28	247	38	807	34	39	80	Strng	Poor	31	36	**34**
55620	MEAD AVE	S 67TH AVE	S 68TH AVE	Local	Asphalt	33	266	49	1024	59	47	80	Strng	Fair	10	31	**54.1**
55640	MEAD AVE	S 68TH AVE	S 69TH AVE	Local	Asphalt	34	263	50	1,043	68	50	80	Strng	Good	9	23	**61**
55600	MEAD AVE	S 69TH AVE	S 71ST AVE	Local	Asphalt	28	428	67	1,398	81	64	60	Mod	V Good	0	19	**75**
55570	MEAD AVE	S 71ST AVE	S 72ND AVE	Local	Asphalt	29	347	56	1,174	80	61	80	Strng	V Good	0	20	**74**
55560	MEAD AVE	S 72ND AVE	VALLEY WEST AVE	Local	Asphalt	32	158	28	590	78	58	80	Strng	V Good	0	22	**71**
55540	MEAD AVE	VALLEY WEST AVE	S 73RD AVE	Local	Asphalt	33	269	49	1,036	62	59	80	Strng	Good	3	35	**60**
55520	MEAD AVE	S 73RD AVE	S 74TH AVE	Local	Asphalt	33	269	49	1,036	57	59	80	Strng	Fair	9	34	**57**
55530	MEAD AVE	S 74TH AVE	S 75TH AVE	Local	Asphalt	31	155	27	561	37	26	80	Strng	Poor	22	41	**32.2**
55390	MEAD AVE	S 78TH AVE	S 79TH AVE	Local	Asphalt	29	494	80	1,671	62	57	80	Strng	Good	11	26	**60**
40130	MEADOW LN	S 38TH AVE	DS@334W S 38TH AVE	Local	Asphalt	32	334	59	1,247	58	43	80	Strng	Fair	13	29	**52**
40140	MEADOW LN	DS@334W S 38TH AVE	S 40TH AVE	Local	Asphalt	31	339	58	1,226	44	37	80	Strng	Marginal	30	26	**41**
39930	MEADOW LN	S 53RD AVE	WEST END	Local	Asphalt	38	175	37	769	40	36	80	Strng	Poor	24	36	**38**
39960	MEADOW LN	S 54TH AVE	DS@177W S 54TH AVE	Local	Asphalt	31	177	30	640	59	49	80	Strng	Fair	10	31	**55**
39870	MEADOW LN	DS@177W S 54TH AVE	S 56TH AVE	Local	Asphalt	31	355	61	1,284	57	55	80	Strng	Fair	7	35	**56**
39940	MEADOW LN	EAST END	S 60TH AVE	Local	Asphalt	30	251	42	879	38	48	80	Strng	Marginal	25	20	**41**
40040	MEADOW LN	S 75TH AVE	WEST END	Local	Asphalt	42	215	50	1056	60	42	80	Strng	Fair	13	27	**53.2**
39990	MEADOW LN	MACLAREN AVE	NW END	Local	Asphalt	39	275	60	1257	53	45	80	Strng	Fair	11	36	**49.4**
43880	MIDVALE RD	S 72ND AVE	S 73RD AVE	Local	Asphalt	29	487	78	1648	67	53	80	Strng	Good	10	23	**61.4**
43840	MIDVALE RD	S 73RD AVE	S 75TH AVE	Local	Asphalt	31	533	92	1928	64	53	80	Strng	Good	10	27	**59.1**
43770	MIDVALE RD	S 75TH AVE	S 75TH AVE	Local	Asphalt	22	123	15	316	73	75	80	Strng	V Good	0	27	**73.3**
43750	MIDVALE RD	S 75TH AVE	S 76TH AVE	Local	Asphalt	23	342	44	918	72	80	80	Strng	V Good	0	28	**73.7**
43720	MIDVALE RD	S 76TH AVE	S 77TH AVE	Local	Asphalt	32	319	57	1191	70	66	80	Strng	Good	0	30	**68**
43700	MIDVALE RD	S 77TH AVE	S 79TH AVE	Local	Asphalt	20	593	66	1384	71	70	60	Mod	V Good	9	20	**69.8**
43690	MIDVALE RD	S 79TH AVE	S 80TH AVE	Local	Asphalt	29	244	39	826	66	49	60	Mod	Good	18	16	**59**
43710	MIDVALE RD	S 80TH AVE	WEST END	Local	Asphalt	42	1075	251	5268	60	52	60	Mod	Fair	22	18	**56**
44230	MIDVALE RD	S 85TH AVE	S 87TH AVE	Local	Asphalt	30	704	117	2464	69	81	60	Mod	V Good	5	26	**72.3**
44250	MIDVALE RD	S 87TH AVE	S 88TH AVE	Local	Asphalt	31	339	58	1,226	72	73	80	Strng	V Good	1	28	**72**
44160	MIDVALE RD	S 88TH AVE	S 89TH AVE	Local	Asphalt	31	289	50	1045	74	54	80	Strng	Good	4	22	**66.6**
43740	MIDVALE RD	S 89TH AVE	S 90TH AVE	Local	Asphalt	30	271	45	949	61	60	80	Strng	Good	11	27	**59.9**
43780	MIDVALE RD	S 90TH AVE	S 90TH AVE	Local	Asphalt	30	130	22	455	59	58	80	Strng	Fair	9	33	**57.7**
43800	MIDVALE RD	S 90TH AVE	S 91ST AVE	Local	Asphalt	31	132	23	477	52	72	80	Strng	Fair	10	38	**57.7**
43810	MIDVALE RD	S 91ST AVE	WEST END	Local	Asphalt	30	138	23	483	59	54	80	Strng	Fair	13	28	**56**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
72610	MODESTO WY	N 46TH AVE	N 47TH AVE	Local	Asphalt	31	265	46	958	100	90	60	Mod	Excellent	0	0	**95.6**
72590	MODESTO WY	EAST END	N 48TH AVE	Local	Asphalt	24	162	22	454	86	67	60	Mod	V Good	0	14	**79.1**
10810	MODESTO WY	N 50TH AVE	DS@173W N 50TH AVE	Local	Asphalt	35	173	34	706	59	36	80	Strng	Fair	6	35	**51**
11090	MODESTO WY	NE END	N 72ND AVE	Local	Asphalt	41	361	82	1725	53	52	80	Strng	Fair	21	26	**51.5**
11380	MODESTO WY	N 72ND AVE	N 74TH AVE	Local	Asphalt	29	669	108	2263	66	75	60	Mod	Good	8	26	**68.2**
22560	MONROE AVE	N 16TH AVE	DS@533W N 16TH AVE	Local	Asphalt	25	533	74	1,555	81	63	60	Mod	V Good	0	18	**74**
22520	MONROE AVE	DS@533W N 16TH AVE	WEST END	Local	Asphalt	23	148	19	397	52	45	80	Strng	Fair	16	31	**49.1**
28050	MT VERNON AVE	N 15TH AVE	N 16TH AVE	Local	Concrete	20	442	49	1031	36	36	60	Mod	Poor	0	0	**35.4**
60030	MULBERRY WY	S 68TH AVE	S 69TH AVE	Local	Asphalt	30	230	38	805	65	65	80	Strng	Good	9	26	**64.2**
47670	MULDER DR	EAST END	S 9TH AVE	Local	Asphalt	16	274	24	511	48	43	60	Mod	Marginal	31	21	**45**
9060	MUOTH WY	N 51ST AVE	DS@250N N 51ST AVE	Local	Asphalt	34	250	47	992	94	84	60	Mod	Excellent	0	6	**89.9**
4590	MURPHY LN	BUWALDA LN	N 3RD ST	Local	Asphalt	31	361	62	1306	67	42	80	Strng	Fair	10	23	**57.4**
4610	MURPHY LN	N 3RD ST	N 4TH ST	Local	Asphalt	31	346	60	1251	66	53	80	Strng	Good	4	30	**61.2**
3600	N ST	N 1ST ST	N 2ND ST	Local	Asphalt	32	325	58	1213	96	87	60	Mod	Excellent	0	4	**92.1**
3610	N ST	N 2ND ST	DS@173E N 2ND ST	Local	Asphalt	32	173	31	646	67	60	60	Mod	Good	15	18	**63.2**
3620	N ST	DS@173E N 2ND ST	DS@335E N 2ND ST	Local	Asphalt	32	162	29	605	62	45	80	Strng	Fair	12	26	**55.5**
3640	N ST	DS@335E N 2ND ST	EAST END	Local	Asphalt	45	645	161	3,386	95	85	60	Mod	Excellent	0	5	**91**
5940	NACHES AVE	E I ST	DS@356N E I ST	Local	Asphalt	33	356	65	1371	79	62	60	Mod	V Good	14	7	**72.5**
5160	NACHES AVE	DS@356N E I ST	E K ST	Local	Asphalt	32	296	53	1,105	67	51	60	Mod	Good	17	16	**60**
4760	NACHES AVE	E K ST	NORTH END	Local	Asphalt	31	451	78	1,631	66	40	80	Strng	Fair	13	21	**56**
8090	NACHES AVE	E G ST	E H ST	Local	Asphalt	46	502	128	2,694	74	52	60	Mod	Good	12	15	**65**
6820	NACHES AVE	E H ST	E I ST	Local	Asphalt	50	259	72	1511	67	61	60	Mod	Good	12	21	**63.7**
13610	NACHES AVE	E LINCOLN AVE	E D ST	Local	Asphalt	48	482	129	2,699	66	45	80	Strng	Fair	10	24	**58**
12270	NACHES AVE	E D ST	E E ST	Local	Asphalt	44	478	117	2,454	75	55	60	Mod	Good	12	13	**67**
10540	NACHES AVE	E E ST	E F ST	Local	Asphalt	44	482	118	2,474	85	66	60	Mod	V Good	3	12	**78**
9030	NACHES AVE	E F ST	E G ST	Local	Asphalt	44	477	117	2,449	74	53	60	Mod	Good	12	14	**66**
15900	NACHES AVE	E MARTIN LUTHER KING JR BLVD	E LINCOLN AVE	Local	Asphalt	44	479	117	2,459	83	64	60	Mod	V Good	0	17	**76**
19900	NACHES AVE	E YAKIMA AVE	STAFF SGT PENDLETON WAY	Local	Asphalt	44	490	120	2,515	87	68	60	Mod	V Good	9	4	**80**
17680	NACHES AVE	STAFF SGT PENDLETON WAY	E MARTIN LUTHER KING JR BLVD	Local	Asphalt	41	480	109	2,296	93	81	60	Mod	Excellent	5	2	**89**
21020	NACHES AVE	E YAKIMA AVE	DS@195S E YAKIMA AVE	Local	Asphalt	75	195	81	1,706	84	65	60	Mod	V Good	7	9	**77**
22120	NACHES AVE	DS@195S E YAKIMA AVE	E CHESTNUT AVE	Local	Asphalt	29	296	48	1001	97	89	60	Mod	Excellent	0	3	**93.4**
23770	NACHES AVE	E CHESTNUT AVE	E WALNUT ST	Local	Asphalt	48	477	127	2671	96	87	60	Mod	Excellent	0	4	**92.1**
26220	NACHES AVE	E WALNUT ST	E SPRUCE ST	Local	Asphalt	44	480	117	2,464	61	53	60	Mod	Fair	18	21	**57**
28430	NACHES AVE	E SPRUCE ST	E PINE ST	Local	Asphalt	44	486	119	2495	55	52	80	Strng	Fair	13	25	**53.2**
30610	NACHES AVE	E PINE ST	E MAPLE ST	Local	Asphalt	47	478	125	2,621	60	59	80	Strng	Fair	13	23	**59**
33530	NACHES AVE	E MAPLE ST	E BEECH ST	Local	Asphalt	46	478	122	2,565	75	55	80	Strng	Good	6	18	**68**
35010	NACHES AVE	E BEECH ST	E RACE ST	Local	Asphalt	46	479	122	2,571	76	56	60	Mod	Good	11	12	**69**
36940	NACHES AVE	E RACE ST	E ADAMS ST	Local	Asphalt	34	434	82	1,722	76	56	60	Mod	Good	6	18	**68**
39560	NACHES AVE	E ADAMS ST	PACIFIC AVE	Local	Asphalt	29	463	75	1,566	68	50	60	Mod	Good	14	18	**61**
40230	NACHES AVE	PACIFIC AVE	DS@264S PACIFIC AVE	Local	Asphalt	23	264	34	708	34	48	80	Strng	Poor	30	36	**38**
41050	NACHES AVE	DS@264S PACIFIC AVE	RAINIER ST	Local	Asphalt	24	228	30	638	42	43	80	Strng	Marginal	28	30	**42**
42020	NACHES AVE	RAINIER ST	WALKER ST	Local	Asphalt	23	166	21	445	37	42	80	Strng	Poor	35	29	**37**
42810	NACHES AVE	WALKER ST	LA SALLE ST	Local	Asphalt	24	295	39	826	39	53	80	Strng	Marginal	28	33	**42.6**
45020	NACHES AVE	LA SALLE ST	E ARLINGTON ST	Local	Asphalt	23	365	47	979	19	48	80	Strng	Poor	42	38	**28**
47650	NOB HILL BLVD	S 1ST ST	DS@362E S 1ST ST	Truck Route	Asphalt	51	362	103	2154	53	66	80	Strng	Fair	12	35	**56**
48070	NOB HILL BLVD	DS@362E S 1ST ST	S 6TH ST	Truck Route	Asphalt	52	318	92	1,929	70	80	60	Mod	V Good	8	22	**73**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
49200	NOB HILL BLVD	S 6TH ST	DS@184E S 6TH ST	Truck Route	Asphalt	51	184	52	1095	67	74	60	Mod	Good	9	24	**68.5**
49260	NOB HILL BLVD	DS@184E S 6TH ST	DS@299E S 6TH ST	Truck Route	Asphalt	51	115	33	684	48	64	80	Strng	Fair	19	33	**52**
49310	NOB HILL BLVD	DS@299E S 6TH ST	S 7TH ST	Truck Route	Asphalt	44	167	41	857	51	71	80	Strng	Fair	16	34	**56**
49290	NOB HILL BLVD	S 7TH ST	S 7TH ST	Truck Route	Asphalt	42	54	13	265	57	78	60	Mod	Good	12	30	**63**
49320	NOB HILL BLVD	S 7TH ST	DS@107E S 7TH ST	Truck Route	Asphalt	43	107	26	537	58	83	80	Strng	Good	8	34	**65**
49340	NOB HILL BLVD	DS@107E S 7TH ST	S 8TH ST	Truck Route	Asphalt	43	170	41	853	70	81	80	Strng	V Good	0	30	**73**
49350	NOB HILL BLVD	S 8TH ST	LA FOLLETTE ST	Truck Route	Asphalt	43	177	42	888	72	73	60	Mod	V Good	8	21	**71**
49370	NOB HILL BLVD	LA FOLLETTE ST	DS@274E LA FOLLETTE ST	Truck Route	Asphalt	44	274	67	1,407	70	75	60	Mod	V Good	13	17	**71**
49390	NOB HILL BLVD	DS@274E LA FOLLETTE ST	S FAIR AVE	Truck Route	Asphalt	43	377	90	1,891	49	59	60	Mod	Fair	29	23	**51**
49400	NOB HILL BLVD	S FAIR AVE	DS@319E S FAIR AVE	Truck Route	Asphalt	55	319	97	2047	52	67	60	Mod	Fair	28	19	**56**
49410	NOB HILL BLVD	DS@319E S FAIR AVE	S 12TH ST	Truck Route	Asphalt	45	336	84	1,764	52	77	60	Mod	Good	27	21	**59**
49430	NOB HILL BLVD	S 12TH ST	S 13TH ST	Truck Route	Asphalt	43	335	80	1,681	55	80	60	Mod	Good	22	22	**62**
49420	NOB HILL BLVD	S 13TH ST	S 14TH ST	Truck Route	Asphalt	44	329	80	1,689	55	80	60	Mod	Good	24	21	**62**
49460	NOB HILL BLVD	S 14TH ST	S 15TH ST	Truck Route	Asphalt	44	350	86	1,797	50	77	60	Mod	Fair	23	27	**58**
49450	NOB HILL BLVD	S 15TH ST	S 16TH ST	Truck Route	Asphalt	44	315	77	1,617	54	79	60	Mod	Good	25	21	**61**
49440	NOB HILL BLVD	S 16TH ST	S 17TH ST	Truck Route	Asphalt	45	322	81	1,691	63	76	60	Mod	Good	13	24	**66**
49470	NOB HILL BLVD	S 17TH ST	S 18TH ST	Truck Route	Asphalt	60	341	114	2,387	63	72	60	Mod	Good	19	18	**65**
72070	NOB HILL BLVD	S 18TH ST	DS@334E S 18TH ST	Truck Route	Asphalt	62	334	115	2,416	71	71	60	Mod	V Good	13	16	**70**
72010	NOB HILL BLVD	DS@334E S 18TH ST	DS@668E S 18TH ST	Truck Route	Asphalt	89	334	165	3468	75	79	60	Mod	V Good	12	14	**75.2**
72000	NOB HILL BLVD	DS@668E S 18TH ST	I 82 RAMP EB	Truck Route	Asphalt	117	168	109	2293	74	70	60	Mod	V Good	19	7	**72.1**
72020	NOB HILL BLVD	I 82 RAMP EB	I 82 RAMP WB	Truck Route	Asphalt	99	614	338	7092	77	71	60	Mod	V Good	12	11	**74.6**
74720	NOB HILL BLVD	I 82 RAMP WB	I 82 RAMP WB	Truck Route	Asphalt	108	477	286	6010	77	93	60	Mod	V Good	12	10	**81.9**
72040	NOB HILL BLVD	I 82 RAMP WB	W BIRCHFIELD RD	Truck Route	Asphalt	89	526	260	5462	73	79	60	Mod	V Good	11	16	**74.1**
47910	NOB HILL BLVD	W NOB HILL BLVD	S 1ST ST	Truck Route	Asphalt	52	957	276	5,806	63	65	60	Mod	Good	13	24	**63**
49160	NOB HILL BLVD	E NOB HILL BLVD	DS@544W E NOB HILL BLVD	Truck Route	Asphalt	51	544	154	3,237	67	76	60	Mod	V Good	14	19	**69**
49210	NOB HILL BLVD	DS@544W E NOB HILL BLVD	LEDWICH AVE	Truck Route	Asphalt	48	176	47	986	74	89	60	Mod	V Good	7	19	**79**
49220	NOB HILL BLVD	LEDWICH AVE	ROCK AVE	Truck Route	Asphalt	49	168	46	960	72	75	60	Mod	V Good	11	17	**72**
49190	NOB HILL BLVD	ROCK AVE	LANDON AVE	Truck Route	Asphalt	48	331	88	1,854	58	74	60	Mod	Good	19	23	**62**
49180	NOB HILL BLVD	LANDON AVE	DS@163W LANDON AVE	Truck Route	Asphalt	49	163	44	932	72	64	60	Mod	Good	10	19	**68**
49150	NOB HILL BLVD	DS@163W LANDON AVE	S 1ST AVE	Truck Route	Asphalt	51	167	47	994	65	75	60	Mod	Good	15	20	**67.1**
49140	NOB HILL BLVD	S 1ST AVE	DS@163W S 1ST AVE	Truck Route	Asphalt	49	163	44	932	58	69	60	Mod	Good	20	22	**60.4**
49120	NOB HILL BLVD	DS@163W S 1ST AVE	S 2ND AVE	Truck Route	Asphalt	49	168	46	960	76	62	60	Mod	V Good	10	14	**70.2**
49080	NOB HILL BLVD	S 2ND AVE	DS@166W S 2ND AVE	Truck Route	Asphalt	48	166	44	930	56	58	80	Strng	Fair	18	25	**56**
48860	NOB HILL BLVD	DS@166W S 2ND AVE	S 3RD AVE	Truck Route	Asphalt	49	162	44	926	73	63	60	Mod	V Good	8	19	**69**
48910	NOB HILL BLVD	S 3RD AVE	S 4TH AVE	Truck Route	Asphalt	49	334	91	1,909	81	68	60	Mod	V Good	9	10	**76**
48920	NOB HILL BLVD	S 4TH AVE	S 5TH AVE	Truck Route	Asphalt	49	342	93	1,955	58	54	60	Mod	Fair	23	19	**56**
48830	NOB HILL BLVD	S 5TH AVE	DS@148W S 5TH AVE	Truck Route	Asphalt	49	148	40	846	63	49	60	Mod	Fair	19	18	**57**
48980	NOB HILL BLVD	DS@148W S 5TH AVE	S 6TH AVE	Truck Route	Asphalt	49	164	45	938	66	64	60	Mod	Good	17	17	**64**
49000	NOB HILL BLVD	S 6TH AVE	DS@164W S 6TH AVE	Truck Route	Asphalt	49	164	45	938	62	58	60	Mod	Good	20	18	**59.6**
48840	NOB HILL BLVD	DS@164W S 6TH AVE	CORNELL AVE	Truck Route	Asphalt	48	153	41	857	63	73	60	Mod	Good	20	18	**65.2**
48770	NOB HILL BLVD	CORNELL AVE	S 7TH AVE	Truck Route	Asphalt	48	341	91	1910	62	72	60	Mod	Good	23	15	**64.5**
48750	NOB HILL BLVD	S 7TH AVE	S 8TH AVE	Truck Route	Asphalt	48	134	36	750	64	78	60	Mod	Good	17	19	**67.8**
48740	NOB HILL BLVD	S 8TH AVE	S 8TH AVE	Truck Route	Asphalt	49	192	52	1,098	58	67	60	Mod	Good	21	21	**60**
48870	NOB HILL BLVD	S 8TH AVE	DS@155W S 8TH AVE	Truck Route	Asphalt	48	155	41	868	64	68	60	Mod	Good	18	19	**64**
48880	NOB HILL BLVD	DS@155W S 8TH AVE	S 9TH AVE	Truck Route	Asphalt	50	120	33	700	63	75	60	Mod	Good	21	16	**66**
48900	NOB HILL BLVD	S 9TH AVE	S 9TH AVE	Truck Route	Asphalt	49	52	14	297	62	66	60	Mod	Good	21	17	**62**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
48950	NOB HILL BLVD	S 9TH AVE	S 10TH AVE	Truck Route	Asphalt	49	352	96	2,012	71	71	60	Mod	V Good	15	13	**70**
48970	NOB HILL BLVD	S 10TH AVE	S 11TH AVE	Truck Route	Asphalt	51	309	88	1839	66	70	60	Mod	Good	20	14	**66.4**
48930	NOB HILL BLVD	S 11TH AVE	DS@149W S 11TH AVE	Truck Route	Asphalt	49	149	41	852	65	66	60	Mod	Good	19	16	**64.5**
48940	NOB HILL BLVD	DS@149W S 11TH AVE	PLEASANT AVE	Truck Route	Asphalt	49	173	47	989	67	73	60	Mod	Good	16	17	**68**
48780	NOB HILL BLVD	PLEASANT AVE	DS@169W PLEASANT AVE	Truck Route	Asphalt	49	169	46	966	64	62	60	Mod	Good	19	17	**62.5**
48800	NOB HILL BLVD	DS@169W PLEASANT AVE	QUEEN AVE	Truck Route	Asphalt	50	164	46	957	65	67	60	Mod	Good	18	16	**64.7**
49020	NOB HILL BLVD	QUEEN AVE	S 12TH AVE	Truck Route	Asphalt	49	338	92	1932	60	76	60	Mod	Good	23	17	**64.2**
49040	NOB HILL BLVD	S 12TH AVE	S 13TH AVE	Truck Route	Asphalt	49	309	84	1766	58	63	60	Mod	Good	23	18	**58.8**
49010	NOB HILL BLVD	S 13TH AVE	DS@214W S 13TH AVE	Truck Route	Asphalt	53	214	63	1323	61	64	60	Mod	Good	19	20	**60.4**
49050	NOB HILL BLVD	DS@214W S 13TH AVE	DS@436W S 13TH AVE	Truck Route	Asphalt	55	222	68	1425	60	58	60	Mod	Fair	21	18	**58.5**
49060	NOB HILL BLVD	DS@436W S 13TH AVE	DS@648W S 13TH AVE	Truck Route	Asphalt	55	211	64	1,354	70	56	60	Mod	Good	10	21	**64**
49090	NOB HILL BLVD	DS@648W S 13TH AVE	S 16TH AVE	Truck Route	Asphalt	54	340	102	2,142	70	58	60	Mod	Good	17	14	**65**
49110	NOB HILL BLVD	S 16TH AVE	S 17TH AVE	Truck Route	Asphalt	52	324	94	1,966	66	57	60	Mod	Good	14	20	**61**
48710	NOB HILL BLVD	S 17TH AVE	S 18TH AVE	Truck Route	Asphalt	53	324	95	2,003	56	74	80	Strng	Good	10	34	**61**
48690	NOB HILL BLVD	S 18TH AVE	S 19TH AVE	Truck Route	Asphalt	57	225	71	1496	46	71	80	Strng	Fair	20	34	**53.2**
48670	NOB HILL BLVD	S 19TH AVE	S 19TH AVE	Truck Route	Asphalt	55	103	31	661	52	69	80	Strng	Fair	10	38	**57**
48660	NOB HILL BLVD	S 19TH AVE	DS@176W S 19TH AVE	Truck Route	Asphalt	56	176	55	1,150	48	71	80	Strng	Fair	13	31	**55**
48640	NOB HILL BLVD	DS@176W S 19TH AVE	S 20TH AVE	Truck Route	Asphalt	55	174	53	1,117	55	77	80	Strng	Good	6	29	**61**
48630	NOB HILL BLVD	S 20TH AVE	DS@168W S 20TH AVE	Truck Route	Asphalt	55	168	51	1,078	44	76	80	Strng	Fair	19	37	**54**
48610	NOB HILL BLVD	DS@168W S 20TH AVE	S 21ST AVE	Truck Route	Asphalt	55	166	51	1065	39	62	80	Strng	Marginal	28	33	**45.6**
48590	NOB HILL BLVD	S 21ST AVE	S 22ND AVE	Truck Route	Asphalt	54	331	99	2085	47	78	60	Mod	Fair	18	29	**55.8**
48570	NOB HILL BLVD	S 22ND AVE	S 23RD AVE	Truck Route	Asphalt	54	330	99	2079	47	69	80	Strng	Fair	19	34	**53.8**
48550	NOB HILL BLVD	S 23RD AVE	S 24TH AVE	Truck Route	Asphalt	53	337	99	2,084	58	59	80	Strng	Fair	12	30	**57**
48530	NOB HILL BLVD	S 24TH AVE	DS@171W S 24TH AVE	Truck Route	Asphalt	56	171	53	1117	46	51	60	Mod	Marginal	28	19	**46.4**
48420	NOB HILL BLVD	DS@171W S 24TH AVE	S 25TH AVE	Truck Route	Asphalt	57	157	50	1044	69	65	60	Mod	Good	10	21	**66.9**
48400	NOB HILL BLVD	S 25TH AVE	S 26TH AVE	Truck Route	Asphalt	52	330	95	2002	53	59	80	Strng	Fair	20	27	**53.8**
48340	NOB HILL BLVD	S 26TH AVE	DS@329W S 26TH AVE	Truck Route	Asphalt	54	329	99	2073	58	73	80	Strng	Good	11	25	**62.2**
48280	NOB HILL BLVD	DS@329W S 26TH AVE	S 28TH AVE	Truck Route	Asphalt	54	328	98	2,066	59	74	60	Mod	Good	13	28	**63**
48200	NOB HILL BLVD	S 28TH AVE	S 28TH AVE	Truck Route	Asphalt	54	175	53	1,103	63	75	60	Mod	Good	14	23	**65**
48180	NOB HILL BLVD	S 28TH AVE	S 29TH AVE	Truck Route	Asphalt	54	106	32	668	54	74	60	Mod	Good	23	23	**59**
48170	NOB HILL BLVD	S 29TH AVE	HOLBROOK CT	Truck Route	Asphalt	55	166	51	1065	57	77	60	Mod	Good	14	29	**62.7**
48140	NOB HILL BLVD	HOLBROOK CT	DS@155W HOLBROOK CT	Truck Route	Asphalt	54	155	47	977	63	67	60	Mod	Good	11	27	**63**
48150	NOB HILL BLVD	DS@155W HOLBROOK CT	DS@269W HOLBROOK CT	Truck Route	Asphalt	55	115	35	738	63	63	80	Strng	Good	11	27	**62**
48120	NOB HILL BLVD	DS@269W HOLBROOK CT	S 31ST AVE	Truck Route	Asphalt	55	286	87	1,835	65	77	60	Mod	Good	12	23	**68**
48050	NOB HILL BLVD	S 31ST AVE	S 32ND AVE	Truck Route	Asphalt	53	329	97	2,034	64	70	60	Mod	Good	18	18	**65**
47970	NOB HILL BLVD	S 32ND AVE	S 33RD AVE	Truck Route	Asphalt	50	329	91	1,919	81	82	60	Mod	V Good	11	8	**81**
47990	NOB HILL BLVD	S 33RD AVE	S 34TH AVE	Truck Route	Asphalt	55	330	101	2,118	81	81	60	Mod	V Good	8	11	**80**
48020	NOB HILL BLVD	S 34TH AVE	DS@347W S 34TH AVE	Truck Route	Asphalt	55	347	106	2,227	82	84	60	Mod	V Good	7	10	**83**
48030	NOB HILL BLVD	DS@347W S 34TH AVE	S 36TH AVE	Truck Route	Asphalt	55	197	60	1,264	86	100	60	Mod	Excellent	4	10	**90**
48080	NOB HILL BLVD	S 36TH AVE	S 37TH AVE	Truck Route	Asphalt	55	280	86	1,797	84	95	60	Mod	Excellent	7	9	**87**
48110	NOB HILL BLVD	S 37TH AVE	S 38TH AVE	Truck Route	Asphalt	55	493	151	3,163	88	85	60	Mod	Excellent	4	9	**86**
48210	NOB HILL BLVD	S 38TH AVE	DS@337W S 38TH AVE	Truck Route	Asphalt	53	337	99	2,084	80	89	60	Mod	V Good	5	15	**83**
48220	NOB HILL BLVD	DS@337W S 38TH AVE	ACKERMAN AVE	Truck Route	Asphalt	53	161	47	996	83	69	60	Mod	V Good	12	5	**77**
48250	NOB HILL BLVD	ACKERMAN AVE	S 40TH AVE	Truck Route	Concrete	53	153	45	946	100	90	60	Mod	Excellent	0	0	**96**
48270	NOB HILL BLVD	S 40TH AVE	S 41ST AVE	Truck Route	Concrete	54	351	105	2,211	100	90	60	Mod	Excellent	0	0	**96**
48300	NOB HILL BLVD	S 41ST AVE	S 42ND AVE	Truck Route	Asphalt	48	298	79	1,669	88	72	60	Mod	V Good	0	12	**82**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary							
										Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
48320	NOB HILL BLVD	S 42ND AVE	S 42ND AVE	Truck Route	Asphalt	46	102	26	547	86	77	60	Mod	V Good	5	8	**83**
48350	NOB HILL BLVD	S 42ND AVE	DS@169W S 42ND AVE	Truck Route	Asphalt	46	169	43	907	94	83	60	Mod	Excellent	0	6	**89.4**
48360	NOB HILL BLVD	DS@169W S 42ND AVE	S 43RD AVE	Truck Route	Asphalt	46	98	25	526	96	90	60	Mod	Excellent	0	4	**92.8**
48460	NOB HILL BLVD	S 43RD AVE	S 44TH AVE	Truck Route	Asphalt	49	303	82	1,732	89	87	60	Mod	Excellent	0	11	**88**
48480	NOB HILL BLVD	S 44TH AVE	DS@301W S 44TH AVE	Truck Route	Asphalt	57	301	95	2,002	90	88	60	Mod	Excellent	0	10	**88**
48410	NOB HILL BLVD	DS@301W S 44TH AVE	S 46TH AVE	Truck Route	Asphalt	46	159	41	853	91	85	60	Mod	Excellent	0	9	**89**
48450	NOB HILL BLVD	S 46TH AVE	DS@411W S 46TH AVE	Truck Route	Asphalt	48	411	110	2,302	96	88	60	Mod	Excellent	0	4	**93**
48490	NOB HILL BLVD	DS@411W S 46TH AVE	S 48TH AVE	Truck Route	Asphalt	45	419	105	2200	84	80	60	Mod	V Good	8	9	**81.9**
48510	NOB HILL BLVD	S 48TH AVE	S 50TH AVE	Truck Route	Asphalt	56	413	128	2698	80	73	60	Mod	V Good	3	16	**77**
48440	NOB HILL BLVD	S 50TH AVE	S 51ST AVE	Truck Route	Asphalt	58	431	139	2,916	74	94	60	Mod	V Good	5	22	**80**
48380	NOB HILL BLVD	S 51ST AVE	DS@517W S 51ST AVE	Truck Route	Asphalt	57	517	164	3438	72	91	60	Mod	V Good	3	25	**77.3**
48290	NOB HILL BLVD	DS@517W S 51ST AVE	S 53RD AVE	Truck Route	Asphalt	57	336	106	2,234	71	95	60	Mod	V Good	3	25	**79**
48230	NOB HILL BLVD	S 53RD AVE	DS@1042W S 53RD AVE	Truck Route	Asphalt	57	1,042	330	6,929	71	100	60	Mod	V Good	8	22	**80**
47950	NOB HILL BLVD	DS@1042W S 53RD AVE	S 64TH AVE	Truck Route	Asphalt	58	2,704	871	18,297	68	100	60	Mod	V Good	9	22	**78**
47880	NOB HILL BLVD	S 64TH AVE	WALMART PARKING LOT	Truck Route	Asphalt	58	566	182	3,830	62	85	60	Mod	Good	14	24	**69**
74950	NOB HILL BLVD	WALMART PARKING LOT	WALMART PARKING LOT	Truck Route	Asphalt	57	658	208	4,376	69	85	60	Mod	V Good	9	22	**73**
47860	NOB HILL BLVD	WALMART PARKING LOT	S 68TH AVE	Truck Route	Asphalt	67	259	96	2,025	75	75	60	Mod	V Good	8	17	**74**
47840	NOB HILL BLVD	S 68TH AVE	S 69TH AVE	Truck Route	Asphalt	58	348	112	2,355	76	92	60	Mod	V Good	10	14	**81**
47800	NOB HILL BLVD	S 69TH AVE	S 70TH AVE	Truck Route	Asphalt	58	374	121	2,531	74	82	60	Mod	V Good	9	17	**76**
47810	NOB HILL BLVD	S 70TH AVE	S 72ND AVE	Truck Route	Asphalt	58	408	131	2,761	55	63	80	Strng	Fair	14	24	**57**
47830	NOB HILL BLVD	S 72ND AVE	DS@277W S 72ND AVE	Minor Arterial	Asphalt	59	277	91	1907	54	63	60	Mod	Fair	20	26	**55.5**
47780	NOB HILL BLVD	DS@277W S 72ND AVE	S 74TH AVE	Minor Arterial	Asphalt	48	382	102	2,139	53	75	60	Mod	Fair	17	30	**59**
47770	NOB HILL BLVD	S 74TH AVE	S 75TH AVE	Minor Arterial	Asphalt	45	208	52	1092	48	68	60	Mod	Fair	25	26	**53.2**
47750	NOB HILL BLVD	S 75TH AVE	S 76TH AVE	Minor Arterial	Asphalt	38	457	96	2026	74	86	60	Mod	V Good	8	18	**77.1**
47740	NOB HILL BLVD	S 76TH AVE	DS@295W S 76TH AVE	Minor Arterial	Asphalt	36	295	59	1,239	73	99	60	Mod	V Good	10	17	**81**
47730	NOB HILL BLVD	DS@295W S 76TH AVE	S 78TH AVE	Minor Arterial	Asphalt	37	194	40	837	83	96	60	Mod	Excellent	5	12	**87**
47720	NOB HILL BLVD	S 78TH AVE	S 80TH AVE	Minor Arterial	Asphalt	35	824	160	3,365	75	78	60	Mod	V Good	7	18	**75**
3290	O ST	WEST END	N 3RD ST	Local	Asphalt	24	341	45	955	59	58	80	Strng	Fair	6	7	**57**
3310	O ST	N 3RD ST	N 4TH ST	Local	Asphalt	30	343	57	1,201	85	74	60	Mod	V Good	5	4	**80**
45790	OAHU LN	EAST END	S 53RD AVE	Local	Asphalt	40	238	53	1,118	72	50	80	Strng	Good	10	18	**64**
64590	OAK AVE	S 21ST AVE	S 23RD AVE	Local	Asphalt	36	693	139	2,911	88	73	60	Mod	V Good	0	12	**82**
75670	OAK AVE	S 23RD AVE	WEST END	Local	Asphalt	36	255	51	1,071	82	76	60	Mod	V Good	3	15	**79**
76330	OAK AVE	S 62ND AVE	S 63RD LN	Other	Asphalt	30	263	44	921	93	78	60	Mod	Excellent	4	3	**87**
3380	OAK ST	N FRONT ST	N 1ST ST	Local	Asphalt	31	348	60	1259	50	47	80	Strng	Marginal	15	36	**47.9**
3360	OAK ST	N FRONT ST	DS@159W N FRONT ST	Local	Asphalt	29	159	26	538	34	71	80	Strng	Marginal	24	42	**45.6**
3390	OAK ST	DS@159W N FRONT ST	GORDON RD	Local	Asphalt	32	160	28	597	43	52	80	Strng	Marginal	20	38	**45**
63680	OCCIDENTAL RD	EAST END	S 64TH AVE	Local	Asphalt	39	1,538	333	6,998	88	81	60	Mod	Excellent	7	4	**85**
63670	OCCIDENTAL RD	S 64TH AVE	S 66TH AVE	Minor Arterial	Asphalt	22	803	98	2,061	60	57	80	Strng	Fair	15	25	**58**
63630	OCCIDENTAL RD	S 66TH AVE	S 69TH AVE	Minor Arterial	Asphalt	25	956	133	2,788	40	51	60	Mod	Marginal	32	28	**42**
63610	OCCIDENTAL RD	S 69TH AVE	S 72ND AVE	Minor Arterial	Asphalt	35	877	171	3581	38	47	60	Mod	Marginal	36	25	**39.3**
63590	OCCIDENTAL RD	S 72ND AVE	S 73RD AVE	Minor Arterial	Asphalt	32	418	74	1,561	56	60	60	Mod	Fair	22	22	**56**
63550	OCCIDENTAL RD	S 73RD AVE	S 77TH AVE	Minor Arterial	Asphalt	32	1,071	190	3,998	41	54	60	Mod	Marginal	30	30	**44**
63470	OCCIDENTAL RD	S 77TH AVE	S 78TH AVE	Minor Arterial	Asphalt	30	319	53	1,117	45	47	80	Strng	Marginal	26	30	**44**
63430	OCCIDENTAL RD	S 78TH AVE	S 79TH AVE	Minor Arterial	Asphalt	32	494	88	1,844	19	47	60	Mod	Poor	49	29	**27**
63440	OCCIDENTAL RD	S 79TH AVE	S 80TH AVE	Minor Arterial	Asphalt	37	361	74	1,558	35	48	80	Strng	Poor	35	31	**38**
63480	OCCIDENTAL RD	S 80TH AVE	DS@1335W S 80TH AVE	Minor Arterial	Asphalt	30	1,335	223	4,673	28	56	60	Mod	Poor	44	28	**36**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
63410	OCCIDENTAL RD	DS@1335W S 80TH AVE	S 85TH AVE	Minor Arterial	Asphalt	30	491	82	1,719	46	56	80	Strng	Marginal	24	30	**48**
63490	OCCIDENTAL RD	S 85TH AVE	S 86TH AVE	Minor Arterial	Asphalt	33	330	61	1271	54	63	80	Strng	Fair	18	29	**55.5**
63510	OCCIDENTAL RD	S 86TH AVE	S 88TH AVE	Minor Arterial	Asphalt	36	495	99	2079	69	82	60	Mod	V Good	9	22	**72.1**
63530	OCCIDENTAL RD	S 88TH AVE	DS@477W S 88TH AVE	Minor Arterial	Asphalt	38	477	101	2,115	66	69	60	Mod	Good	11	24	**65**
63500	OCCIDENTAL RD	DS@477W S 88TH AVE	HONEYCRISP CT	Minor Arterial	Asphalt	36	1539	308	6464	63	83	60	Mod	Good	11	26	**68.5**
63390	OCCIDENTAL RD	HONEYCRISP CT	S 96TH AVE	Minor Arterial	Asphalt	36	653	131	2743	57	85	60	Mod	Good	19	24	**65.2**
73150	OCCIDENTAL RD	S 96TH AVE	DS@1338W S 96TH AVE	Minor Arterial	Asphalt	25	1338	186	3903	41	58	60	Mod	Marginal	31	29	**45**
45660	OLMSTEAD CT	EAST END	S 75TH AVE	Local	Asphalt	37	298	62	1301	56	48	80	Strng	Fair	13	30	**52.6**
45680	OLMSTEAD CT	S 75TH AVE	S 76TH AVE	Local	Asphalt	28	278	43	908	66	56	80	Strng	Good	8	26	**62**
45610	OLMSTEAD CT	S 76TH AVE	S 77TH AVE	Local	Asphalt	29	320	52	1083	68	65	80	Strng	Good	5	27	**66.2**
45510	OLMSTEAD CT	S 77TH AVE	S 78TH CT	Local	Asphalt	29	351	57	1188	66	60	80	Strng	Good	3	31	**63.2**
45490	OLMSTEAD CT	S 78TH CT	S 79TH AVE	Local	Asphalt	30	272	45	952	71	64	80	Strng	Good	0	29	**67.6**
20530	OREGON AVE	W LINCOLN AVE	DS@158N W LINCOLN AVE	Local	Asphalt	33	158	29	608	70	46	60	Mod	Good	14	16	**60.7**
19340	OREGON AVE	DS@158N W LINCOLN AVE	GARFIELD AVE	Local	Asphalt	32	165	29	616	84	65	60	Mod	V Good	1	15	**76.8**
18840	OREGON AVE	GARFIELD AVE	DS@165N GARFIELD AVE	Local	Asphalt	33	165	30	635	82	63	60	Mod	V Good	0	18	**75**
17750	OREGON AVE	DS@165N GARFIELD AVE	MCKINLEY AVE	Local	Asphalt	32	162	29	605	75	62	80	Strng	V Good	0	25	**70**
17170	OREGON AVE	MCKINLEY AVE	DS@167N MCKINLEY AVE	Local	Asphalt	32	167	30	623	77	57	60	Mod	V Good	7	16	**69**
16420	OREGON AVE	DS@167N MCKINLEY AVE	ROOSEVELT AVE	Local	Asphalt	32	164	29	612	75	59	80	Strng	Good	0	25	**69.1**
15950	OREGON AVE	ROOSEVELT AVE	DS@168N ROOSEVELT AVE	Local	Asphalt	33	168	31	647	75	68	60	Mod	V Good	3	22	**71.7**
14990	OREGON AVE	DS@168N ROOSEVELT AVE	CHERRY AVE	Local	Asphalt	31	168	29	608	82	63	60	Mod	V Good	0	18	**75.2**
23080	OREGON AVE	FOLSOM AVE	DS@166N FOLSOM AVE	Local	Asphalt	30	166	28	581	79	60	60	Mod	V Good	4	17	**71.5**
22380	OREGON AVE	DS@166N FOLSOM AVE	JEFFERSON AVE	Local	Asphalt	30	162	27	567	69	49	80	Strng	Good	9	22	**61.4**
21800	OREGON AVE	JEFFERSON AVE	DS@162N JEFFERSON AVE	Local	Asphalt	32	162	29	605	77	57	60	Mod	V Good	5	18	**69.1**
21140	OREGON AVE	DS@162N JEFFERSON AVE	W LINCOLN AVE	Local	Asphalt	32	164	29	612	81	62	80	Strng	V Good	0	19	**73.7**
3090	P ST	WEST END	N 3RD ST	Local	Asphalt	25	320	44	933	34	58	80	Strng	Marginal	31	30	**40.8**
3070	P ST	N 3RD ST	N 4TH ST	Local	Asphalt	26	341	49	1034	50	50	80	Strng	Fair	21	14	**49.1**
39770	PACIFIC AVE	S FAIR AVE	DS@485E S FAIR AVE	Major Collector	Asphalt	48	485	129	2,716	69	72	60	Mod	V Good	14	18	**69**
39790	PACIFIC AVE	DS@485E S FAIR AVE	S 13TH ST	Major Collector	Asphalt	47	188	49	1,031	75	82	60	Mod	V Good	8	18	**76**
39810	PACIFIC AVE	S 13TH ST	S 14TH ST	Major Collector	Asphalt	40	318	71	1,484	62	77	60	Mod	Good	17	22	**66**
39830	PACIFIC AVE	S 14TH ST	S 15TH ST	Major Collector	Asphalt	39	300	65	1,365	60	83	60	Mod	Good	18	22	**66**
39840	PACIFIC AVE	S 15TH ST	DS@439E S 15TH ST	Major Collector	Asphalt	39	439	95	1997	62	77	60	Mod	Good	17	21	**65.7**
39950	PACIFIC AVE	DS@439E S 15TH ST	S 18TH ST	Major Collector	Asphalt	39	536	116	2439	68	71	60	Mod	Good	10	22	**68.5**
39620	PACIFIC AVE	S 6TH ST	DS@188E S 6TH ST	Local	Asphalt	38	188	40	833	92	78	60	Mod	Excellent	4	4	**86.8**
39640	PACIFIC AVE	DS@188E S 6TH ST	S 7TH ST	Local	Asphalt	36	190	38	798	97	88	60	Mod	Excellent	0	3	**93.2**
39650	PACIFIC AVE	S 7TH ST	DS@187E S 7TH ST	Local	Asphalt	37	187	38	807	89	90	60	Mod	Excellent	4	7	**88.7**
39660	PACIFIC AVE	DS@187E S 7TH ST	S 8TH ST	Local	Asphalt	38	136	29	603	95	86	60	Mod	Excellent	0	5	**91.4**
39680	PACIFIC AVE	S 8TH ST	S 8TH ST	Local	Asphalt	39	56	12	255	95	84	60	Mod	Excellent	0	5	**91**
39690	PACIFIC AVE	S 8TH ST	DS@114E S 8TH ST	Local	Asphalt	38	114	24	505	95	85	60	Mod	Excellent	0	5	**91**
39700	PACIFIC AVE	DS@114E S 8TH ST	DS@191E S 8TH ST	Local	Asphalt	41	77	18	368	95	93	60	Mod	Excellent	0	5	**94**
39710	PACIFIC AVE	DS@191E S 8TH ST	S 9TH ST	Local	Asphalt	39	107	23	487	98	99	60	Mod	Excellent	0	2	**97**
39730	PACIFIC AVE	S 9TH ST	S 9TH ST	Local	Asphalt	39	76	16	346	92	78	60	Mod	Excellent	0	8	**87**
39740	PACIFIC AVE	S 9TH ST	DS@192E S 9TH ST	Local	Asphalt	40	192	43	896	96	87	60	Mod	Excellent	0	4	**92**
39760	PACIFIC AVE	DS@192E S 9TH ST	S FAIR AVE	Local	Asphalt	40	226	50	1055	66	48	60	Mod	Fair	18	16	**58.5**
39500	PACIFIC AVE	S 3RD ST	DS@188E S 3RD ST	Local	Asphalt	39	188	41	855	56	66	80	Strng	Fair	10	34	**58**
39520	PACIFIC AVE	DS@188E S 3RD ST	S 4TH ST	Local	Asphalt	39	190	41	865	64	92	80	Strng	V Good	0	36	**72**
39530	PACIFIC AVE	S 4TH ST	DS@184E S 4TH ST	Local	Asphalt	40	184	41	859	64	84	80	Strng	V Good	0	36	**70**



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
39540	PACIFIC AVE	DS@184E S 4TH ST	DS@292E S 4TH ST	Local	Asphalt	39	107	23	487	69	75	80	Strng	V Good	0	31	**70**
39570	PACIFIC AVE	DS@292E S 4TH ST	S NACHES AVE	Local	Asphalt	39	85	18	387	65	71	80	Strng	Good	0	35	**67**
39550	PACIFIC AVE	S NACHES AVE	S NACHES AVE	Local	Asphalt	39	85	18	387	74	72	60	Mod	V Good	5	21	**72**
39590	PACIFIC AVE	S NACHES AVE	DS@104E S NACHES AVE	Local	Asphalt	39	104	23	473	63	74	60	Mod	Good	9	28	**65.4**
39580	PACIFIC AVE	DS@104E S NACHES AVE	DS@161E S NACHES AVE	Local	Asphalt	41	57	13	273	61	83	60	Mod	Good	8	31	**67.1**
39610	PACIFIC AVE	DS@161E S NACHES AVE	S 6TH ST	Local	Asphalt	38	138	29	612	67	42	80	Strng	Fair	0	33	**58**
39370	PACIFIC AVE	S 1ST ST	DS@189E S 1ST ST	Local	Asphalt	46	189	48	1014	61	54	80	Strng	Fair	15	24	**58**
39420	PACIFIC AVE	DS@189E S 1ST ST	S 2ND ST	Local	Asphalt	46	217	55	1165	73	68	80	Strng	V Good	0	27	**70.6**
39490	PACIFIC AVE	S 2ND ST	S 3RD ST	Local	Asphalt	39	225	49	1,024	67	48	80	Strng	Good	0	33	**60**
34490	PALATINE AVE	EAST END	DS@183W EAST END	Local	Asphalt	30	183	31	641	69	45	80	Strng	Good	10	21	**60**
34480	PALATINE AVE	DS@183W EAST END	S 28TH AVE	Local	Asphalt	31	283	49	1,024	74	60	60	Mod	Good	8	18	**68**
31110	PARK AVE	W YAKIMA AVE	PARK LN	Local	Concrete	23	394	50	1,057	65	45	60	Mod	Fair	0	0	**57**
29860	PARK AVE	PARK LN	N 18TH AVE	Local	Concrete	24	59	8	165	54	39	60	Mod	Marginal	0	0	**48**
29660	PARK AVE	N 18TH AVE	DS@369W N 18TH AVE	Local	Asphalt	25	369	51	1076	68	46	80	Strng	Good	8	24	**59.6**
28360	PARK AVE	DS@369W N 18TH AVE	ELEANOR ST	Local	Asphalt	25	95	13	277	70	54	60	Mod	Good	14	16	**63.7**
28090	PARK AVE	ELEANOR ST	DS@174N ELEANOR ST	Local	Asphalt	23	174	22	467	59	59	80	Strng	Fair	12	29	**58**
27190	PARK AVE	DS@174N ELEANOR ST	SUMMITVIEW AVE	Local	Asphalt	24	172	23	482	58	24	80	Strng	Marginal	14	28	**46**
26420	PARK AVE	SUMMITVIEW AVE	BROWNE AVE	Local	Concrete	24	352	47	986	84	65	60	Mod	V Good	0	0	**77.3**
24140	PARK AVE	BROWNE AVE	NORTH END	Local	Concrete	36	450	90	1,882	80	61	60	Mod	V Good	0	0	**73**
29910	PARK LN	N 16TH AVE	DS@448W N 16TH AVE	Local	Asphalt	24	448	60	1,254	43	42	80	Strng	Marginal	29	28	**41**
29870	PARK LN	DS@448W N 16TH AVE	PARK AVE	Local	Asphalt	25	306	43	893	59	54	80	Strng	Fair	12	29	**56**
40530	PARK PL	NORTH END	MACLAREN ST	Local	Asphalt	36	332	67	1,406	51	46	80	Strng	Marginal	16	33	**48**
47000	PARKWAY PL	EAST END	S 38TH AVE	Local	Asphalt	36	241	49	1025	57	33	80	Strng	Marginal	11	32	**48.2**
35240	PARSONS AVE	W CHESTNUT AVE	W WALNUT ST	Local	Asphalt	31	658	113	2,380	73	52	80	Strng	Good	6	21	**66**
37260	PARSONS AVE	W WALNUT ST	DS@446S W WALNUT ST	Local	Asphalt	31	446	77	1,613	68	47	80	Strng	Good	6	26	**60**
37310	PARSONS AVE	S 65TH AVE	DS@262W S 65TH AVE	Local	Asphalt	31	262	45	948	68	42	80	Strng	Fair	7	25	**58.2**
60190	PARSONS LP	PARSONS LP (N)	FREMONT DR	Local	Asphalt	32	822	146	3069	62	61	80	Strng	Good	8	30	**60.7**
74490	PARSONS LP (N)	PARSONS LP	S 66TH AVE	Local	Asphalt	30	527	88	1845	63	65	80	Strng	Good	9	28	**62.7**
35120	PAULSON PL	MCCARGAR ST	SOUTH END	Local	Asphalt	30	282	47	987	70	46	80	Strng	Good	3	27	**60.7**
41310	PEACH ST	S 1ST AVE	DS@131W S 1ST AVE	Local	Asphalt	24	131	17	367	72	50	80	Strng	Good	8	20	**64.2**
41270	PEACH ST	DS@131W S 1ST AVE	S 2ND AVE	Local	Asphalt	27	139	21	438	77	74	60	Mod	V Good	2	21	**75.4**
41290	PEACH ST	S 2ND AVE	DS@165W S 2ND AVE	Local	Asphalt	31	165	28	597	37	54	60	Mod	Marginal	35	28	**41.7**
41300	PEACH ST	DS@165W S 2ND AVE	S 3RD AVE	Local	Asphalt	31	164	28	593	13	28	80	Strng	V Poor	38	30	**17.2**
41000	PEACH ST	S 3RD AVE	DS@161W S 3RD AVE	Local	Asphalt	25	161	22	470	80	61	60	Mod	V Good	3	17	**72.5**
40980	PEACH ST	DS@161W S 3RD AVE	S 4TH AVE	Local	Asphalt	24	165	22	462	79	60	60	Mod	V Good	6	15	**71.9**
40960	PEACH ST	S 4TH AVE	DS@163W S 4TH AVE	Local	Asphalt	23	163	21	437	73	51	60	Mod	Good	18	9	**64.7**
40970	PEACH ST	DS@163W S 4TH AVE	S 5TH AVE	Local	Asphalt	23	168	21	451	88	75	60	Mod	V Good	0	12	**83.4**
40920	PEACH ST	S 5TH AVE	DS@163W S 5TH AVE	Local	Asphalt	24	163	22	456	68	42	80	Strng	Fair	12	20	**58.2**
40930	PEACH ST	DS@163W S 5TH AVE	S 6TH AVE	Local	Asphalt	25	166	23	484	82	64	60	Mod	V Good	0	18	**75.4**
40940	PEACH ST	S 6TH AVE	DS@165W S 6TH AVE	Local	Asphalt	24	165	22	462	65	37	80	Strng	Fair	5	30	**54.6**
40900	PEACH ST	DS@165W S 6TH AVE	CORNELL AVE	Local	Asphalt	24	158	21	442	64	35	80	Strng	Fair	9	27	**53.5**
40810	PEACH ST	CORNELL AVE	S 7TH AVE	Local	Asphalt	23	187	24	502	77	57	60	Mod	V Good	12	11	**69**
40830	PEACH ST	S 7TH AVE	DS@191W S 7TH AVE	Local	Asphalt	24	191	25	535	89	70	60	Mod	V Good	0	11	**82**
40860	PEACH ST	DS@191W S 7TH AVE	S 8TH AVE	Local	Asphalt	24	183	24	512	85	68	60	Mod	V Good	1	14	**79**
40880	PEACH ST	S 8TH AVE	DS@191W S 8TH AVE	Local	Asphalt	23	191	24	513	82	67	60	Mod	V Good	1	17	**76**
40840	PEACH ST	DS@191W S 8TH AVE	S 9TH AVE	Local	Asphalt	23	185	24	496	88	70	60	Mod	V Good	0	12	**81**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
32590	PEACHTREE LN	W CHESTNUT AVE	PLUM LN	Local	Asphalt	30	831	139	2,909	52	41	80	Strng	Marginal	26	22	**48**
29710	PEAR TREE DR	EAST END	N 50TH AVE	Local	Asphalt	46	89	23	481	55	14	80	Strng	Marginal	16	30	**40**
3220	PECKS CANYON RD	DS@1441E GREEN RIDGE DR	POWERHOUSE RD	Major Collector	Asphalt	35	550	107	2,246	55	54	80	Strng	Fair	18	28	**53**
3270	PECKS CANYON RD	DS@1122E GREEN RIDGE DR	DS@1441E GREEN RIDGE DR	Major Collector	Asphalt	28	319	50	1,042	65	76	80	Strng	Good	5	30	**68**
3430	PECKS CANYON RD	DS@792E GREEN RIDGE DR	DS@1122E GREEN RIDGE DR	Major Collector	Asphalt	27	330	50	1,040	64	59	80	Strng	Good	12	24	**61**
3720	PECKS CANYON RD	GREEN RIDGE DR	DS@792E GREEN RIDGE DR	Major Collector	Asphalt	30	792	132	2,772	33	52	80	Strng	Poor	35	32	**38**
9220	PECKS CANYON RD	HILL DR	SCENIC DR	Local	Asphalt	26	588	85	1784	30	54	80	Strng	Poor	35	35	**37.2**
59340	PERRY CT	EAST END	S 14TH AVE	Local	Asphalt	41	219	49	1,038	84	65	60	Mod	V Good	0	16	**77**
74480	PERRY CT	S 69TH AVE	WEST END	Local	Asphalt	39	275	59	1,244	49	53	80	Strng	Fair	18	33	**49**
59480	PERRY LP	PERRY LP (S)	S 16TH AVE	Local	Asphalt	35	138	27	564	100	90	60	Mod	Excellent	0	0	**95.6**
59540	PERRY LP (N)	PERRY LP (S)	PERRY LP	Local	Asphalt	31	438	75	1584	75	68	60	Mod	V Good	5	20	**71.7**
59630	PERRY LP (S)	PERRY LP (N)	PERRY LP	Local	Asphalt	30	508	85	1,778	72	52	60	Mod	Good	10	19	**64**
59450	PERRY ST	S 3RD AVE	DS@474W S 3RD AVE	Local	Asphalt	30	474	79	1,659	100	90	60	Mod	Excellent	0	0	**96**
59420	PERRY ST	DS@474W S 3RD AVE	WEST END	Local	Asphalt	44	119	29	608	51	40	80	Strng	Marginal	14	35	**46**
59500	PERRY ST	PERRY LP	DS@552W PERRY LP	Local	Asphalt	27	552	83	1739	30	56	80	Strng	Poor	31	39	**37.8**
59520	PERRY ST	DS@552W PERRY LP	WEST END	Local	Asphalt	25	240	33	700	41	38	80	Strng	Poor	23	37	**38.7**
59240	PERRY ST	S 73RD AVE	S 74TH AVE	Local	Asphalt	35	243	47	992	56	57	60	Mod	Fair	27	17	**55.2**
59170	PERRY ST	S 74TH AVE	CONOVER DR	Local	Asphalt	31	277	48	1,002	36	50	80	Strng	Marginal	30	34	**40**
8890	PHAETON PL	CONESTOGA BLVD	WEST END	Local	Asphalt	37	204	42	884	92	75	60	Mod	Excellent	8	0	**86**
60170	PICKENS LP	S 66TH AVE	S 66TH AVE	Local	Asphalt	32	968	172	3,614	65	58	80	Strng	Good	7	28	**62**
40600	PICKENS RD	TIETON DR	DS@576S TIETON DR	Local	Asphalt	31	576	99	2,083	65	48	80	Strng	Fair	12	23	**58**
43500	PICKENS RD	DS@576S TIETON DR	SOUTH END	Local	Asphalt	32	661	118	2468	43	35	80	Strng	Marginal	28	29	**39.3**
20510	PIERCE AVE	W LINCOLN AVE	DS@159N W LINCOLN AVE	Local	Asphalt	32	159	28	594	51	34	80	Strng	Marginal	24	25	**44.1**
19310	PIERCE AVE	DS@159N W LINCOLN AVE	GARFIELD AVE	Local	Asphalt	20	165	18	385	56	36	80	Strng	Marginal	20	24	**48**
18820	PIERCE AVE	GARFIELD AVE	W D ST	Local	Asphalt	28	106	16	346	68	45	80	Strng	Good	5	27	**60**
17740	PIERCE AVE	W D ST	MCKINLEY AVE	Local	Asphalt	31	221	38	799	58	50	80	Strng	Fair	8	34	**55**
20830	PIERCE AVE	W LINCOLN AVE	W LINCOLN AVE	Truck Route	Asphalt	31	140	24	506	84	66	60	Mod	V Good	0	16	**77.5**
22390	PIERCE AVE	N 7TH AVE	JEFFERSON AVE	Truck Route	Asphalt	33	164	30	631	97	88	60	Mod	Excellent	0	3	**93**
21810	PIERCE AVE	JEFFERSON AVE	W LINCOLN AVE	Truck Route	Asphalt	40	209	46	975	89	72	60	Mod	V Good	6	5	**83**
26300	PIERCE AVE	SUMMITVIEW AVE	DS@161N SUMMITVIEW AVE	Major Collector	Asphalt	34	161	30	639	81	63	60	Mod	V Good	7	12	**74**
25180	PIERCE AVE	DS@161N SUMMITVIEW AVE	W A ST	Major Collector	Asphalt	32	52	9	194	81	68	60	Mod	V Good	3	16	**76**
24630	PIERCE AVE	W A ST	BROWNE AVE	Major Collector	Asphalt	31	99	17	358	74	77	80	Strng	V Good	0	26	**74**
24370	PIERCE AVE	BROWNE AVE	DS@169N BROWNE AVE	Major Collector	Asphalt	30	169	28	592	68	70	80	Strng	Good	5	27	**67.8**
23710	PIERCE AVE	DS@169N BROWNE AVE	FOLSOM AVE	Major Collector	Asphalt	31	176	30	637	83	74	60	Mod	V Good	0	18	**79**
23050	PIERCE AVE	FOLSOM AVE	N 7TH AVE	Major Collector	Asphalt	20	163	18	380	87	68	60	Mod	V Good	0	13	**79.8**
22770	PIERCE AVE	N 7TH AVE	W MARTIN LUTHER KING JR BLVD	Major Collector	Asphalt	18	70	7	147	98	89	60	Mod	Excellent	0	2	**94**
58290	PIERCE CT	S 70TH AVE	WEST END	Local	Asphalt	42	182	43	897	58	46	80	Strng	Fair	13	29	**53.2**
59110	PIERCE ST	VOELKER AVE	DS@163W VOELKER AVE	Local	Asphalt	20	163	18	380	78	58	80	Strng	V Good	0	22	**70.6**
59100	PIERCE ST	DS@163W VOELKER AVE	LEDWICH AVE	Local	Asphalt	19	162	17	359	82	63	60	Mod	V Good	0	18	**75**
59090	PIERCE ST	LEDWICH AVE	ROCK AVE	Local	Asphalt	21	336	39	823	63	52	80	Strng	Fair	9	28	**58**
59070	PIERCE ST	ROCK AVE	LANDON AVE	Local	Asphalt	21	332	39	813	82	64	60	Mod	V Good	0	18	**75.4**
59050	PIERCE ST	LANDON AVE	S 1ST AVE	Local	Asphalt	19	333	35	738	80	62	60	Mod	V Good	3	17	**73.1**
59020	PIERCE ST	S 1ST AVE	S 2ND AVE	Local	Asphalt	18	334	33	701	82	63	60	Mod	V Good	4	14	**75**
59000	PIERCE ST	S 2ND AVE	S 3RD AVE	Local	Asphalt	19	333	35	738	75	55	60	Mod	Good	13	12	**68**
58980	PIERCE ST	S 3RD AVE	S 4TH AVE	Local	Asphalt	29	336	54	1137	71	48	60	Mod	Good	19	10	**62.5**
58920	PIERCE ST	S 4TH AVE	S 5TH AVE	Local	Asphalt	29	330	53	1117	80	61	60	Mod	V Good	5	16	**72.3**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
58840	PIERCE ST	S 5TH AVE	S 6TH AVE	Local	Asphalt	28	321	50	1049	85	66	60	Mod	V Good	0	15	**78**
58820	PIERCE ST	S 6TH AVE	CORNELL AVE	Local	Asphalt	29	339	55	1147	65	37	60	Mod	Fair	23	12	**54.3**
58880	PIERCE ST	CORNELL AVE	S 7TH AVE	Local	Asphalt	24	330	44	924	84	66	60	Mod	V Good	5	11	**77.3**
58900	PIERCE ST	S 7TH AVE	S 8TH AVE	Local	Asphalt	28	329	51	1,075	91	74	60	Mod	Excellent	0	9	**85**
58870	PIERCE ST	S 8TH AVE	S 9TH AVE	Local	Asphalt	11	329	20	422	72	50	60	Mod	Good	15	13	**64**
58930	PIERCE ST	S 9TH AVE	S 10TH AVE	Local	Asphalt	15	327	27	572	100	90	60	Mod	Excellent	0	0	**95.6**
58740	PIERCE ST	S 10TH AVE	PLEASANT AVE	Local	Asphalt	22	645	79	1656	89	70	60	Mod	V Good	0	11	**82.2**
58770	PIERCE ST	PLEASANT AVE	S 12TH AVE	Local	Asphalt	28	683	106	2231	79	60	60	Mod	V Good	10	11	**71.5**
58760	PIERCE ST	S 12TH AVE	S 13TH AVE	Local	Asphalt	29	329	53	1113	80	61	60	Mod	V Good	3	17	**72.7**
58720	PIERCE ST	S 13TH AVE	S 14TH AVE	Local	Asphalt	28	332	52	1085	80	61	60	Mod	V Good	7	13	**72.9**
58690	PIERCE ST	S 14TH AVE	S 15TH AVE	Local	Asphalt	28	307	48	1003	88	69	60	Mod	V Good	3	9	**80.8**
58670	PIERCE ST	S 15TH AVE	S 16TH AVE	Local	Asphalt	26	308	44	934	91	74	60	Mod	Excellent	0	9	**85**
71140	PIERCE ST	S 67TH AVE	S 68TH AVE	Local	Asphalt	30	275	46	963	72	74	60	Mod	V Good	3	24	**72**
58250	PIERCE ST	VALLEY WEST AVE	S 73RD AVE	Local	Asphalt	28	260	40	849	76	72	80	Strng	V Good	0	24	**74**
58270	PIERCE ST	S 73RD AVE	S 74TH AVE	Local	Asphalt	28	258	40	843	71	76	60	Mod	V Good	5	24	**72**
27910	PINE ST	S 6TH ST	DS@199E S 6TH ST	Local	Asphalt	32	199	35	743	91	74	60	Mod	Excellent	0	9	**85**
27580	PINE ST	DS@199E S 6TH ST	S 7TH ST	Local	Asphalt	32	190	34	709	68	52	60	Mod	Good	13	20	**61**
27280	PINE ST	S 7TH ST	DS@190E S 7TH ST	Local	Asphalt	32	190	34	709	84	66	60	Mod	V Good	1	15	**77**
26960	PINE ST	DS@190E S 7TH ST	UNION ST	Local	Asphalt	32	83	15	310	59	25	80	Strng	Marginal	12	29	**46.7**
27000	PINE ST	UNION ST	S 8TH ST	Local	Asphalt	39	182	39	828	70	51	60	Mod	Good	19	11	**63**
29920	PINE ST	S 3RD ST	DS@201E S 3RD ST	Local	Asphalt	40	201	45	938	57	58	60	Mod	Fair	21	22	**56**
29460	PINE ST	DS@201E S 3RD ST	S 4TH ST	Local	Asphalt	40	199	44	929	73	62	60	Mod	Good	18	9	**68**
29050	PINE ST	S 4TH ST	DS@202E S 4TH ST	Local	Asphalt	39	202	44	919	65	61	80	Strng	Good	9	26	**63**
28830	PINE ST	DS@202E S 4TH ST	S NACHES AVE	Local	Asphalt	39	219	47	996	46	54	60	Mod	Marginal	26	28	**48**
28420	PINE ST	S NACHES AVE	DS@217E S NACHES AVE	Local	Asphalt	32	217	39	810	53	50	80	Strng	Fair	16	31	**51**
28210	PINE ST	DS@217E S NACHES AVE	S 6TH ST	Local	Asphalt	32	201	36	750	63	35	80	Strng	Fair	14	23	**53**
30880	PINE ST	S 1ST ST	DS@202E S 1ST ST	Local	Asphalt	40	202	45	943	65	49	60	Mod	Fair	16	19	**58**
30550	PINE ST	DS@202E S 1ST ST	S 2ND ST	Local	Asphalt	40	200	44	933	67	44	80	Strng	Fair	9	24	**58.2**
30360	PINE ST	S 2ND ST	DS@201E S 2ND ST	Local	Asphalt	40	201	45	938	62	44	80	Strng	Fair	9	30	**54.6**
30090	PINE ST	DS@201E S 2ND ST	S 3RD ST	Local	Asphalt	40	200	44	933	52	29	80	Strng	Marginal	19	28	**43.5**
31470	PINE ST	S FRONT ST	DS@187E S FRONT ST	Local	Asphalt	40	187	42	873	77	57	60	Mod	V Good	7	16	**69.6**
31320	PINE ST	DS@187E S FRONT ST	S 1ST ST	Local	Asphalt	40	199	44	929	74	53	80	Strng	Good	5	21	**66.4**
33550	PINE ST	S 1ST AVE	S 2ND AVE	Local	Asphalt	44	211	52	1,083	56	29	80	Strng	Marginal	26	18	**46**
33900	PINE ST	S 2ND AVE	DS@198W S 2ND AVE	Local	Asphalt	45	198	50	1,040	88	69	60	Mod	V Good	0	13	**81**
33980	PINE ST	DS@198W S 2ND AVE	S 3RD AVE	Local	Asphalt	45	207	52	1,087	66	55	80	Strng	Good	11	23	**62**
34160	PINE ST	S 3RD AVE	DS@195W S 3RD AVE	Local	Asphalt	46	195	50	1,047	35	30	80	Strng	Poor	32	33	**33**
34860	PINE ST	S 4TH AVE	S 5TH AVE	Local	Asphalt	45	397	99	2,084	42	52	80	Strng	Marginal	22	32	**44**
35360	PINE ST	S 5TH AVE	S 6TH AVE	Local	Asphalt	44	399	98	2,048	53	51	80	Strng	Fair	10	36	**52**
35870	PINE ST	S 6TH AVE	DS@201W S 6TH AVE	Local	Asphalt	44	201	49	1,032	55	52	80	Strng	Fair	4	40	**53**
36340	PINE ST	DS@201W S 6TH AVE	S 7TH AVE	Local	Asphalt	45	185	46	971	48	63	80	Strng	Fair	19	33	**52**
36520	PINE ST	S 7TH AVE	DS@193W S 7TH AVE	Local	Asphalt	38	193	41	856	42	64	80	Strng	Marginal	1	35	**48**
36560	PINE ST	DS@193W S 7TH AVE	S 8TH AVE	Local	Asphalt	39	194	42	883	57	53	80	Strng	Fair	10	32	**54.9**
36740	PINE ST	S 8TH AVE	DS@188W S 8TH AVE	Local	Asphalt	40	188	42	877	74	69	80	Strng	V Good	1	25	**71.7**
37000	PINE ST	DS@188W S 8TH AVE	S 9TH AVE	Local	Asphalt	41	189	43	904	65	64	80	Strng	Good	6	29	**64**
37250	PINE ST	S 9TH AVE	DS@191W S 9TH AVE	Local	Asphalt	44	191	47	980	69	68	80	Strng	Good	5	26	**67.8**
37350	PINE ST	DS@191W S 9TH AVE	S 10TH AVE	Local	Asphalt	43	190	45	953	52	64	80	Strng	Fair	4	44	**54.9**



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
37390	PINE ST	S 10TH AVE	DS@190W S 10TH AVE	Local	Asphalt	44	190	46	975	76	70	80	Strng	V Good	0	24	**73.7**
37820	PINE ST	DS@190W S 10TH AVE	S 11TH AVE	Local	Asphalt	44	191	47	980	67	66	80	Strng	Good	5	28	**66**
18430	PITCHER ST	UNION ST	TERRACE HGTS WY	Local	Asphalt	31	239	41	864	65	45	80	Strng	Fair	12	22	**58**
17950	PITCHER ST	TERRACE HGTS WY	S 10TH ST	Local	Asphalt	30	527	88	1,845	60	40	80	Strng	Fair	12	28	**53**
17920	PITCHER ST	S 10TH ST	EAST END	Local	Asphalt	29	402	65	1,357	45	45	80	Strng	Marginal	27	28	**44**
71120	PLATEAU PL	N 74TH AVE	NW END	Local	Asphalt	29	1343	216	4544	67	53	80	Strng	Good	8	26	**61.2**
55360	PLATH AVE	S 16TH AVE	DS@406W S 16TH AVE	Local	Asphalt	24	406	54	1,137	63	40	80	Strng	Fair	10	27	**54**
55300	PLATH AVE	DS@406W S 16TH AVE	S 18TH AVE	Local	Asphalt	23	296	38	794	52	41	80	Strng	Marginal	18	30	**47**
55290	PLATH AVE	S 18TH AVE	DS@378W S 18TH AVE	Local	Asphalt	24	378	50	1,058	72	50	80	Strng	Good	8	20	**64**
55250	PLATH AVE	DS@378W S 18TH AVE	S 20TH AVE	Local	Asphalt	22	245	30	629	74	65	60	Mod	V Good	8	18	**70**
55180	PLATH AVE	S 27TH AVE	S 28TH AVE	Local	Asphalt	30	226	38	791	59	47	80	Strng	Fair	13	28	**54**
55170	PLATH AVE	S 29TH AVE	S 30TH AVE	Local	Asphalt	30	226	38	791	33	39	80	Strng	Poor	38	29	**34**
55500	PLATH AVE	S 32ND AVE	S 33RD AVE	Local	Asphalt	31	357	61	1291	36	46	80	Strng	Poor	34	31	**38.1**
74530	PLATH AVE	S 78TH AVE	S 79TH AVE	Local	Asphalt	27	514	77	1,619	55	67	80	Strng	Fair	14	31	**58**
55070	PLATH AVE	S 79TH AVE	S 80TH AVE	Local	Asphalt	28	174	27	568	56	38	80	Strng	Fair	14	29	**49**
40450	PLEASANT AVE	TIETON DR	HAYNES ST	Local	Asphalt	33	351	64	1,351	54	54	80	Strng	Fair	0	46	**53**
41930	PLEASANT AVE	HAYNES ST	MACLAREN ST	Local	Asphalt	31	321	55	1161	53	67	80	Strng	Fair	6	41	**56.9**
43140	PLEASANT AVE	MACLAREN ST	SAINT HELENS ST	Local	Asphalt	32	329	58	1228	71	53	80	Strng	Good	10	20	**64**
44600	PLEASANT AVE	SAINT HELENS ST	W ARLINGTON ST	Local	Asphalt	32	312	55	1165	78	58	80	Strng	V Good	0	22	**70.4**
45580	PLEASANT AVE	W ARLINGTON ST	BAKER ST	Local	Asphalt	32	347	62	1295	75	63	60	Mod	V Good	11	15	**69.8**
46890	PLEASANT AVE	BAKER ST	DS@348S BAKER ST	Local	Asphalt	33	348	64	1340	78	70	60	Mod	V Good	0	22	**74.6**
47460	PLEASANT AVE	DS@348S BAKER ST	STEWART ST	Local	Asphalt	31	308	53	1,114	77	78	60	Mod	V Good	1	22	**77**
48720	PLEASANT AVE	STEWART ST	W NOB HILL BLVD	Local	Asphalt	32	332	59	1239	77	57	80	Strng	V Good	1	22	**69.8**
49770	PLEASANT AVE	W NOB HILL BLVD	HAMM AVE	Local	Asphalt	32	331	59	1236	66	45	80	Strng	Fair	11	23	**58.5**
50320	PLEASANT AVE	HAMM AVE	DS@318S HAMM AVE	Local	Asphalt	31	318	55	1150	70	60	60	Mod	Good	11	19	**65.4**
52460	PLEASANT AVE	DS@318S HAMM AVE	W VIOLA AVE	Local	Asphalt	33	673	123	2591	48	38	80	Strng	Marginal	21	31	**44.1**
54540	PLEASANT AVE	W VIOLA AVE	W LOGAN AVE	Local	Asphalt	31	660	114	2,387	73	51	80	Strng	Good	8	19	**65**
56150	PLEASANT AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	31	662	114	2394	64	47	80	Strng	Fair	12	24	**57.1**
57110	PLEASANT AVE	W MEAD AVE	WOODLAND AVE	Local	Asphalt	30	430	72	1,505	81	62	60	Mod	V Good	4	15	**73**
57520	PLEASANT AVE	WOODLAND AVE	W KING ST	Local	Asphalt	41	217	49	1,038	100	90	60	Mod	Excellent	0	0	**96**
58150	PLEASANT AVE	W KING ST	DS@276S W KING ST	Local	Asphalt	34	276	52	1,095	76	56	80	Strng	Good	0	24	**69**
58390	PLEASANT AVE	DS@276S W KING ST	SAINT JOHNS ST	Local	Asphalt	34	212	40	841	100	90	60	Mod	Excellent	0	0	**96**
58700	PLEASANT AVE	SAINT JOHNS ST	W PIERCE ST	Local	Asphalt	26	153	22	464	79	60	60	Mod	V Good	3	17	**72**
59880	PLEASANT AVE	W PIERCE ST	SPOKANE ST	Local	Asphalt	23	664	85	1782	82	63	60	Mod	V Good	8	10	**74.6**
60950	PLEASANT AVE	SPOKANE ST	W WASHINGTON AVE	Local	Asphalt	22	678	83	1740	80	61	60	Mod	V Good	4	16	**72.7**
32610	PLUM LN	W CHESTNUT AVE	PEACHTREE LN	Local	Asphalt	28	687	107	2244	64	43	60	Mod	Fair	20	17	**55.5**
12070	POPLAR ST	N 3RD AVE	DS@211W N 3RD AVE	Local	Asphalt	30	211	35	739	52	39	80	Strng	Marginal	27	21	**46.4**
11990	POPLAR ST	DS@211W N 3RD AVE	N 4TH AVE	Local	Asphalt	31	232	40	839	67	46	60	Mod	Fair	19	15	**58.5**
11500	POPLAR ST	N 4TH AVE	DS@179W N 4TH AVE	Local	Asphalt	31	179	31	647	64	41	60	Mod	Fair	22	15	**54.6**
11510	POPLAR ST	DS@179W N 4TH AVE	N 5TH AVE	Local	Asphalt	29	168	27	568	80	61	60	Mod	V Good	7	13	**72.7**
11530	POPLAR ST	N 5TH AVE	DS@178W N 5TH AVE	Local	Asphalt	31	178	31	644	77	57	80	Strng	V Good	0	23	**69.4**
11540	POPLAR ST	DS@178W N 5TH AVE	N 6TH AVE	Local	Asphalt	31	164	28	593	77	63	80	Strng	V Good	0	23	**71.9**
21310	POPLAR VIEW WY	W LINCOLN AVE	DS@505S W LINCOLN AVE	Local	Asphalt	22	505	62	1296	74	54	60	Mod	Good	9	16	**66.4**
21910	POPLAR VIEW WY	DS@505S W LINCOLN AVE	N 80TH AVE	Local	Asphalt	22	675	83	1733	80	61	60	Mod	V Good	4	16	**72.5**
21920	POPLAR VIEW WY	N 80TH AVE	DS@432W N 80TH AVE	Local	Asphalt	23	432	55	1159	100	90	60	Mod	Excellent	0	0	**95.6**
21830	POPLAR VIEW WY	DS@432W N 80TH AVE	WEST END	Local	Asphalt	20	158	18	369	56	32	80	Strng	Marginal	27	18	**47**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
4150	POWERHOUSE RD	RIVER RD	DS@259W RIVER RD	Major Collector	Asphalt	45	259	65	1360	78	59	80	Strng	V Good	0	22	**70.6**
3740	POWERHOUSE RD	DS@259W RIVER RD	DS@698W RIVER RD	Major Collector	Asphalt	45	439	110	2,305	63	73	60	Mod	Good	17	20	**65**
3530	POWERHOUSE RD	DS@698W RIVER RD	PECKS CANYON RD	Major Collector	Asphalt	43	1142	273	5729	54	74	60	Mod	Good	19	24	**59.6**
3210	POWERHOUSE RD	PECKS CANYON RD	W POWERHOUSE RD	Major Collector	Asphalt	46	965	247	5179	65	70	80	Strng	Good	7	28	**65.4**
7650	POWERHOUSE RD	CASTLEVALE RD	GARRETT LN	Minor Arterial	Asphalt	32	383	68	1430	77	72	60	Mod	V Good	3	20	**74.4**
7000	POWERHOUSE RD	GARRETT LN	N 40TH AVE	Minor Arterial	Asphalt	35	573	111	2,340	72	60	80	Strng	Good	7	22	**66**
72680	POWERHOUSE RD	ENGLEWOOD AVE	DS@436W ENGLEWOOD AVE	Major Collector	Asphalt	31	436	75	1577	61	59	60	Mod	Good	19	20	**59.1**
13070	POWERHOUSE RD	DS@436W ENGLEWOOD AVE	DS@677W ENGLEWOOD AVE	Major Collector	Asphalt	31	242	42	875	78	69	60	Mod	V Good	6	16	**73.9**
12480	POWERHOUSE RD	DS@677W ENGLEWOOD AVE	DS@1323W ENGLEWOOD AVE	Major Collector	Asphalt	33	645	118	2,483	78	75	60	Mod	V Good	5	16	**76**
11130	POWERHOUSE RD	DS@1323W ENGLEWOOD AVE	DS@1572W ENGLEWOOD AVE	Major Collector	Asphalt	34	250	47	992	88	87	60	Mod	Excellent	0	12	**87**
10490	POWERHOUSE RD	DS@1572W ENGLEWOOD AVE	N 34TH AVE	Major Collector	Asphalt	28	432	67	1,411	83	81	60	Mod	V Good	7	11	**81**
72640	POWERHOUSE RD	N 34TH AVE	KERN RD	Major Collector	Asphalt	30	684	114	2,394	85	71	60	Mod	V Good	4	11	**80**
72670	POWERHOUSE RD	KERN RD	GARRETT LN	Major Collector	Asphalt	32	62	11	231	89	86	60	Mod	Excellent	0	11	**88**
72660	POWERHOUSE RD	GARRETT LN	CASTLEVALE RD	Major Collector	Asphalt	33	636	117	2449	81	75	60	Mod	V Good	5	14	**78.5**
19140	POWERHOUSE RD	N 24TH AVE	N 25TH AVE	Major Collector	Asphalt	26	461	67	1,398	72	62	60	Mod	Good	12	15	**68**
18500	POWERHOUSE RD	N 25TH AVE	N 26TH AVE	Major Collector	Asphalt	29	268	43	907	64	49	80	Strng	Fair	16	20	**58**
17790	POWERHOUSE RD	N 26TH AVE	DS@586W N 26TH AVE	Major Collector	Asphalt	25	586	81	1,709	54	47	60	Mod	Fair	25	21	**50**
16370	POWERHOUSE RD	DS@586W N 26TH AVE	DS@992W N 26TH AVE	Major Collector	Asphalt	26	406	59	1,232	56	42	60	Mod	Fair	26	17	**50**
72710	POWERHOUSE RD	DS@992W N 26TH AVE	ENGLEWOOD AVE	Major Collector	Asphalt	25	355	49	1035	58	43	80	Strng	Fair	19	23	**51.5**
2890	POWERHOUSE RD	POWERHOUSE RD	DS@1022W POWERHOUSE RD	Major Collector	Asphalt	32	1,022	182	3,815	82	63	60	Mod	V Good	9	9	**75**
2700	POWERHOUSE RD	DS@1022W POWERHOUSE RD	DS@2188W POWERHOUSE RD	Major Collector	Asphalt	26	1,165	168	3,534	73	51	60	Mod	Good	14	13	**64**
2320	POWERHOUSE RD	DS@2188W POWERHOUSE RD	COWICHE CANYON RD	Major Collector	Asphalt	25	889	123	2,593	47	64	80	Strng	Fair	18	35	**52**
2270	POWERHOUSE RD	COWICHE CANYON RD	DS@145N COWICHE CANYON RD	Major Collector	Asphalt	21	145	17	355	52	43	80	Strng	Marginal	25	23	**48**
2170	POWERHOUSE RD	DS@145N COWICHE CANYON RD	GARRETSON GRD	Major Collector	Asphalt	20	462	51	1,078	67	47	60	Mod	Good	19	14	**59**
50770	PRASCH AVE	LEDWICH AVE	DS@162W LEDWICH AVE	Local	Asphalt	30	162	27	567	76	56	80	Strng	Good	5	19	**69**
50750	PRASCH AVE	DS@162W LEDWICH AVE	ROCK AVE	Local	Asphalt	28	166	26	542	79	59	80	Strng	V Good	0	21	**72**
50720	PRASCH AVE	ROCK AVE	DS@165W ROCK AVE	Local	Asphalt	27	165	25	520	76	62	60	Mod	V Good	5	19	**70**
50690	PRASCH AVE	DS@165W ROCK AVE	LANDON AVE	Local	Asphalt	30	163	27	571	74	52	80	Strng	Good	6	20	**66**
50570	PRASCH AVE	LANDON AVE	DS@168W LANDON AVE	Local	Asphalt	29	168	27	568	88	69	60	Mod	V Good	0	12	**80.7**
50530	PRASCH AVE	DS@168W LANDON AVE	S 1ST AVE	Local	Asphalt	29	164	26	555	88	69	60	Mod	V Good	0	12	**80.7**
50510	PRASCH AVE	S 1ST AVE	S 2ND AVE	Local	Asphalt	30	331	55	1,159	79	59	60	Mod	V Good	8	14	**71**
50610	PRASCH AVE	S 2ND AVE	S 3RD AVE	Local	Asphalt	29	333	54	1,127	81	62	80	Strng	V Good	0	19	**74**
50760	PRASCH AVE	S 3RD AVE	S 4TH AVE	Local	Asphalt	29	332	53	1,123	63	40	80	Strng	Fair	0	36	**55**
50740	PRASCH AVE	S 4TH AVE	S 5TH AVE	Local	Asphalt	29	329	53	1113	64	49	80	Strng	Fair	7	30	**58**
50660	PRASCH AVE	S 5TH AVE	S 6TH AVE	Local	Asphalt	30	325	54	1,138	74	52	60	Mod	Good	10	16	**65**
50640	PRASCH AVE	S 6TH AVE	CORNELL AVE	Local	Asphalt	28	329	51	1,075	79	60	60	Mod	V Good	5	16	**72**
50590	PRASCH AVE	CORNELL AVE	S 7TH AVE	Local	Asphalt	30	328	55	1,148	57	43	80	Strng	Fair	19	24	**51**
50550	PRASCH AVE	S 7TH AVE	S 8TH AVE	Local	Asphalt	29	325	52	1,100	66	39	80	Strng	Fair	16	18	**56**
50390	PRASCH AVE	S 8TH AVE	DS@154W S 8TH AVE	Local	Asphalt	30	154	26	539	51	49	60	Mod	Fair	32	16	**49**
50370	PRASCH AVE	DS@154W S 8TH AVE	S 9TH AVE	Local	Asphalt	29	170	27	575	65	36	80	Strng	Fair	16	20	**54**
50360	PRASCH AVE	S 9TH AVE	S 10TH AVE	Local	Asphalt	21	328	38	804	35	42	80	Strng	Poor	27	30	**36**
50680	PRASCH AVE	QUEEN AVE	DS@161W QUEEN AVE	Local	Asphalt	21	161	19	394	54	25	80	Strng	Marginal	8	26	**44**
50520	PRASCH AVE	DS@161W QUEEN AVE	S 12TH AVE	Local	Asphalt	13	160	12	243	48	48	80	Strng	Marginal	12	28	**46**
50490	PRASCH AVE	S 12TH AVE	S 13TH AVE	Local	Asphalt	20	325	36	758	64	39	80	Strng	Fair	14	23	**54**
50450	PRASCH AVE	S 13TH AVE	S 14TH AVE	Local	Asphalt	20	320	36	747	35	27	60	Mod	Poor	43	22	**31**
50470	PRASCH AVE	S 14TH AVE	S 15TH AVE	Local	Asphalt	21	327	38	801	29	30	60	Mod	Poor	49	22	**28**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name

GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
50430	PRASCH AVE	S 15TH AVE	S 16TH AVE	Local	Asphalt	21	341	40	835	30	29	80	Strng	Poor	45	25	**29**
50850	PRASCH AVE	S 16TH AVE	S 17TH AVE	Local	Asphalt	22	324	40	832	59	50	60	Mod	Fair	20	22	**54**
50870	PRASCH AVE	S 17TH AVE	DS@99W S 17TH AVE	Local	Asphalt	22	99	12	254	65	38	80	Strng	Fair	5	30	**55**
50880	PRASCH AVE	DS@99W S 17TH AVE	S 18TH AVE	Local	Asphalt	22	276	34	708	58	47	80	Strng	Fair	20	22	**53.5**
50840	PRASCH AVE	S 18TH AVE	S 19TH AVE	Local	Asphalt	24	173	23	484	58	61	60	Mod	Fair	18	24	**58**
50830	PRASCH AVE	S 19TH AVE	S 20TH AVE	Local	Asphalt	23	449	57	1,205	68	50	80	Strng	Good	5	28	**61**
50280	PRASCH AVE	S 20TH AVE	S 21ST AVE	Local	Asphalt	17	339	32	672	76	55	80	Strng	Good	4	21	**68**
50300	PRASCH AVE	S 21ST AVE	S 22ND AVE	Local	Asphalt	29	334	54	1,130	76	55	60	Mod	Good	7	17	**68**
49950	PRASCH AVE	EAST END	S 28TH AVE	Local	Asphalt	30	159	27	557	50	39	80	Strng	Marginal	19	31	**45.6**
50040	PRASCH AVE	S 34TH AVE	WEST END	Local	Asphalt	33	242	44	932	53	43	80	Strng	Marginal	14	33	**49**
49880	PRASCH AVE	S 38TH AVE	DS@160W S 38TH AVE	Local	Asphalt	29	160	26	541	64	40	80	Strng	Fair	9	27	**55**
49910	PRASCH AVE	DS@160W S 38TH AVE	S 39TH AVE	Local	Asphalt	30	76	13	266	49	48	80	Strng	Marginal	11	40	**47.6**
50220	PRASCH AVE	S 41ST AVE	DS@306W S 41ST AVE	Local	Asphalt	30	306	51	1,071	75	58	80	Strng	Good	0	25	**69**
50230	PRASCH AVE	DS@306W S 41ST AVE	S 43RD AVE	Local	Asphalt	29	367	59	1242	78	63	80	Strng	V Good	0	22	**72.5**
50170	PRASCH AVE	EAST END	S 48TH AVE	Local	Asphalt	34	350	65	1372	66	40	80	Strng	Fair	11	23	**56.3**
50110	PRASCH AVE	EAST END	S 68TH AVE	Local	Asphalt	28	132	21	431	69	67	80	Strng	Good	0	31	**67.1**
50130	PRASCH AVE	S 68TH AVE	S 69TH AVE	Local	Asphalt	31	349	60	1262	69	63	80	Strng	Good	0	31	**65.7**
75450	PRASCH AVE	S 69TH AVE	S 69TH AVE	Local	Asphalt	30	43	7	151	64	62	80	Strng	Good	0	36	**62.2**
50100	PRASCH AVE	S 69TH AVE	S 70TH AVE	Local	Asphalt	28	355	55	1,160	65	69	80	Strng	Good	8	27	**66**
50080	PRASCH AVE	S 70TH AVE	S 72ND AVE	Local	Asphalt	21	405	47	992	61	56	80	Strng	Fair	10	29	**58.8**
56450	PRESSON LN	W MEAD AVE	NORTH END	Local	Asphalt	40	793	176	3701	43	49	80	Strng	Marginal	26	31	**44.1**
24060	PRESTIGE CT	SE END	PRESTIGE PL	Local	Asphalt	45	84	21	443	62	32	80	Strng	Fair	11	27	**50.9**
23990	PRESTIGE CT	PRESTIGE PL	N 50TH AVE	Local	Asphalt	31	177	30	640	69	44	80	Strng	Good	11	20	**59.6**
23980	PRESTIGE PL	PRESTIGE CT	NORTH END	Local	Asphalt	46	80	21	431	63	35	80	Strng	Fair	13	24	**53**
6850	PROSPECT WY	PROSPECT WY	COWICHE CANYON RD	Local	Asphalt	32	1,553	276	5,798	38	54	60	Mod	Marginal	37	24	**42**
6860	PROSPECT WY	PROSPECT WY	N 66TH AVE	Local	Asphalt	36	944	189	3,965	68	74	60	Mod	V Good	15	17	**69**
2800	Q ST	WEST END	N 3RD ST	Local	Asphalt	21	309	36	757	94	82	60	Mod	Excellent	0	6	**89**
2840	Q ST	N 3RD ST	N 4TH ST	Local	Asphalt	24	340	45	952	36	63	60	Mod	Marginal	35	29	**43.5**
2820	Q ST	N 4TH ST	DS@332E N 4TH ST	Local	Asphalt	22	332	41	852	80	61	60	Mod	V Good	12	8	**72.9**
2810	Q ST	DS@332E N 4TH ST	EAST END	Local	Asphalt	22	355	43	911	100	90	60	Mod	Excellent	0	0	**95.6**
40500	QUEEN ANNE BLVD	S 4TH AVE	DS@183W S 4TH AVE	Local	Asphalt	31	183	32	662	94	83	60	Mod	Excellent	0	6	**89**
40180	QUEEN ANNE BLVD	DS@183W S 4TH AVE	S 5TH AVE	Local	Asphalt	28	196	30	640	89	70	60	Mod	V Good	0	11	**82**
70220	QUEEN ANNE BLVD	S 5TH AVE	DIVISION ST	Local	Asphalt	28	224	35	732	73	52	80	Strng	Good	0	27	**65**
40460	QUEEN AVE	TIETON DR	HAYNES ST	Local	Asphalt	33	358	66	1,378	49	43	80	Strng	Marginal	26	25	**46**
41900	QUEEN AVE	HAYNES ST	MACLAREN ST	Local	Asphalt	27	317	48	999	57	59	60	Mod	Fair	20	23	**57**
43200	QUEEN AVE	MACLAREN ST	SAINT HELENS ST	Local	Asphalt	27	330	50	1,040	68	45	60	Mod	Good	17	15	**59**
44630	QUEEN AVE	SAINT HELENS ST	W ARLINGTON ST	Local	Asphalt	32	311	55	1,161	73	52	80	Strng	Good	3	23	**65**
45640	QUEEN AVE	W ARLINGTON ST	BAKER ST	Local	Asphalt	30	350	58	1,225	68	53	80	Strng	Good	12	20	**62**
46850	QUEEN AVE	BAKER ST	DS@327S BAKER ST	Local	Asphalt	30	327	55	1,145	69	48	80	Strng	Good	6	25	**61**
47470	QUEEN AVE	DS@327S BAKER ST	STEWART ST	Local	Asphalt	29	328	53	1110	36	36	80	Strng	Poor	30	34	**34.8**
48810	QUEEN AVE	STEWART ST	W NOB HILL BLVD	Local	Asphalt	30	330	55	1155	71	48	80	Strng	Good	7	22	**62.5**
50670	QUEEN AVE	HAMM AVE	W PRASCH AVE	Local	Asphalt	31	341	59	1233	80	71	60	Mod	V Good	6	14	**76.3**
52540	QUEEN AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	30	650	108	2275	72	61	60	Mod	Good	9	19	**67.3**
54570	QUEEN AVE	W VIOLA AVE	W LOGAN AVE	Local	Asphalt	31	659	113	2383	44	50	80	Strng	Marginal	21	35	**45.3**
56210	QUEEN AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	32	654	116	2442	65	42	80	Strng	Fair	10	25	**56.3**
57550	QUEEN AVE	W MEAD AVE	W KING ST	Local	Asphalt	31	641	110	2318	95	85	60	Mod	Excellent	5	0	**90.8**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary							
										Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
57960	QUEEN AVE	W KING ST	DS@90S W KING ST	Local	Asphalt	26	90	13	273	100	90	60	Mod	Excellent	0	0	**95.6**
58060	QUEEN AVE	DS@90S W KING ST	DS@151S W KING ST	Local	Asphalt	31	60	10	217	100	90	60	Mod	Excellent	0	0	**96**
58170	QUEEN AVE	DS@151S W KING ST	SOUTH END	Local	Asphalt	34	146	28	579	100	90	60	Mod	Excellent	0	0	**96**
60930	QUEEN AVE	NORTH END	W WASHINGTON AVE	Local	Asphalt	33	319	58	1,228	94	82	60	Mod	Excellent	6	0	**89**
8360	QUINCE ST	N 1ST AVE	DS@296W N 1ST AVE	Local	Asphalt	24	296	39	829	69	46	60	Mod	Good	16	15	**60**
8380	QUINCE ST	DS@296W N 1ST AVE	DS@514W N 1ST AVE	Local	Asphalt	23	217	28	582	66	49	60	Mod	Good	21	13	**59**
8390	QUINCE ST	DS@514W N 1ST AVE	N 4TH AVE	Local	Asphalt	23	131	17	352	73	59	60	Mod	Good	7	20	**68**
8400	QUINCE ST	N 4TH AVE	N 5TH AVE	Local	Asphalt	24	332	44	930	67	44	60	Mod	Fair	18	15	**58.2**
2650	R ST	N 1ST ST	N 2ND ST	Local	Asphalt	42	374	87	1,833	57	58	80	Strng	Fair	16	27	**56**
2640	R ST	N 2ND ST	N 3RD ST	Local	Asphalt	38	622	131	2,758	54	65	80	Strng	Fair	12	34	**57**
2690	R ST	N 3RD ST	N 4TH ST	Local	Asphalt	32	347	62	1,295	60	47	80	Strng	Fair	10	30	**55**
2670	R ST	N 4TH ST	N 6TH ST	Local	Asphalt	32	350	62	1307	64	71	80	Strng	Good	8	28	**65.7**
2620	R ST	N 6TH ST	DS@331E N 6TH ST	Local	Asphalt	31	331	57	1,197	66	61	80	Strng	Good	6	28	**64**
2610	R ST	DS@331E N 6TH ST	FREEWAY LAKE RD	Local	Asphalt	22	633	77	1625	65	61	60	Mod	Good	17	18	**62.5**
33730	RACE ST	S FAIR AVE	DS@183E S FAIR AVE	Local	Asphalt	20	183	20	427	75	54	60	Mod	Good	9	16	**67**
33770	RACE ST	DS@183E S FAIR AVE	S 12TH ST	Local	Asphalt	20	180	20	420	86	67	60	Mod	V Good	0	14	**79.1**
33780	RACE ST	S 12TH ST	DS@181E S 12TH ST	Local	Asphalt	20	181	20	422	62	40	60	Mod	Fair	22	16	**53.2**
33810	RACE ST	DS@181E S 12TH ST	S 13TH ST	Local	Asphalt	26	177	26	537	82	63	60	Mod	V Good	0	18	**75**
33820	RACE ST	S 13TH ST	DS@183E S 13TH ST	Local	Asphalt	28	183	28	598	81	67	60	Mod	V Good	0	19	**75.4**
33840	RACE ST	DS@183E S 13TH ST	DS@360E S 13TH ST	Local	Asphalt	21	177	21	434	75	78	60	Mod	V Good	17	8	**75.5**
33830	RACE ST	DS@360E S 13TH ST	S 15TH ST	Local	Asphalt	22	245	30	629	82	69	60	Mod	V Good	2	16	**77**
33650	RACE ST	S 15TH ST	EAST END	Local	Asphalt	24	386	51	1,081	84	65	60	Mod	V Good	5	12	**77**
34570	RACE ST	S 6TH ST	DS@204E S 6TH ST	Local	Asphalt	39	204	44	928	84	65	60	Mod	V Good	10	7	**77**
34310	RACE ST	DS@204E S 6TH ST	S 7TH ST	Local	Asphalt	39	203	44	924	80	68	60	Mod	V Good	14	6	**75**
34100	RACE ST	S 7TH ST	DS@211E S 7TH ST	Local	Asphalt	40	211	47	985	90	72	60	Mod	V Good	0	10	**83**
33950	RACE ST	DS@211E S 7TH ST	S 8TH ST	Local	Asphalt	40	192	43	896	87	68	60	Mod	V Good	0	13	**80**
33850	RACE ST	S 8TH ST	S 9TH ST	Local	Asphalt	40	427	95	1,993	78	61	60	Mod	V Good	3	19	**71**
33690	RACE ST	S 9TH ST	DS@141E S 9TH ST	Local	Asphalt	28	141	22	461	70	53	60	Mod	Good	16	13	**63**
33700	RACE ST	DS@141E S 9TH ST	DS@210E S 9TH ST	Local	Asphalt	28	70	11	229	68	44	80	Strng	Good	13	19	**59**
33720	RACE ST	DS@210E S 9TH ST	S FAIR AVE	Local	Asphalt	28	137	21	448	52	20	80	Strng	Marginal	24	24	**40**
36500	RACE ST	S 3RD ST	DS@207E S 3RD ST	Local	Asphalt	40	207	46	966	88	69	60	Mod	V Good	0	13	**81**
36330	RACE ST	DS@207E S 3RD ST	S 4TH ST	Local	Asphalt	40	191	42	891	94	81	60	Mod	Excellent	1	5	**89**
35880	RACE ST	S 4TH ST	DS@199E S 4TH ST	Local	Asphalt	40	199	44	929	81	62	60	Mod	V Good	4	15	**74**
35400	RACE ST	DS@199E S 4TH ST	S NACHES AVE	Local	Asphalt	40	223	50	1041	81	62	60	Mod	V Good	4	15	**73.9**
35000	RACE ST	S NACHES AVE	DS@219E S NACHES AVE	Local	Asphalt	40	219	49	1022	85	67	60	Mod	V Good	2	13	**78.3**
34730	RACE ST	DS@219E S NACHES AVE	S 6TH ST	Local	Asphalt	40	182	40	849	90	70	60	Mod	V Good	0	11	**82**
37320	RACE ST	S 1ST ST	DS@204E S 1ST ST	Local	Asphalt	40	204	45	952	76	56	60	Mod	Good	16	8	**69**
37120	RACE ST	DS@204E S 1ST ST	S 2ND ST	Local	Asphalt	40	195	43	910	84	66	60	Mod	V Good	0	16	**77.3**
36770	RACE ST	S 2ND ST	DS@204E S 2ND ST	Local	Asphalt	39	204	44	928	88	69	60	Mod	V Good	5	7	**81**
36590	RACE ST	DS@204E S 2ND ST	S 3RD ST	Local	Asphalt	40	201	45	938	89	70	60	Mod	V Good	0	11	**81.9**
37490	RACE ST	S FRONT ST	DS@191E S FRONT ST	Local	Asphalt	40	191	42	891	69	45	80	Strng	Good	0	31	**60.1**
37370	RACE ST	DS@191E S FRONT ST	S 1ST ST	Local	Asphalt	40	192	43	896	55	29	80	Strng	Marginal	20	25	**45**
70820	RACQUET LN	S 24TH AVE	WEST END	Local	Asphalt	28	1307	203	4270	35	53	80	Strng	Marginal	31	34	**39.9**
40620	RAINIER ST	S 9TH ST	S FAIR AVE	Local	Asphalt	23	496	63	1331	72	49	80	Strng	Good	7	22	**63.5**
41090	RAINIER ST	S 6TH ST	DS@164E S 6TH ST	Local	Asphalt	31	164	28	593	85	66	60	Mod	V Good	1	14	**77.5**
41110	RAINIER ST	DS@164E S 6TH ST	S 7TH ST	Local	Asphalt	31	168	29	608	86	67	60	Mod	V Good	0	14	**79**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
41120	RAINIER ST	S 7TH ST	DS@169E S 7TH ST	Local	Asphalt	31	169	29	611	91	72	60	Mod	V Good	2	8	**84**
41160	RAINIER ST	DS@169E S 7TH ST	S 8TH ST	Local	Asphalt	32	167	30	623	84	66	60	Mod	V Good	0	16	**77.5**
41170	RAINIER ST	S 8TH ST	DS@171E S 8TH ST	Local	Asphalt	30	171	29	599	85	67	60	Mod	V Good	5	9	**78.3**
41190	RAINIER ST	DS@171E S 8TH ST	S 9TH ST	Local	Asphalt	32	181	32	676	78	59	60	Mod	V Good	12	10	**71**
41040	RAINIER ST	S NACHES AVE	DS@163E S NACHES AVE	Local	Asphalt	23	163	21	437	63	48	80	Strng	Fair	14	23	**57**
41080	RAINIER ST	DS@163E S NACHES AVE	S 6TH ST	Local	Asphalt	23	166	21	445	75	54	80	Strng	Good	3	22	**67**
49250	RANCH RITE RD	S 1ST ST	DS@238E S 1ST ST	Local	Asphalt	39	238	52	1,083	67	51	80	Strng	Good	7	26	**61**
49280	RANCH RITE RD	DS@238E S 1ST ST	S 6TH ST	Local	Asphalt	38	275	58	1,219	69	51	80	Strng	Good	12	20	**62**
49240	RANCH RITE RD	WEST END	S 1ST ST	Local	Asphalt	32	298	53	1,113	40	28	80	Strng	Poor	33	27	**35**
26110	RANCHO LN	SUMMITVIEW AVE	NW END	Local	Asphalt	22	303	37	778	54	24	80	Strng	Marginal	19	28	**43**
18970	RICHEY RD	EAST END	N 30TH AVE	Local	Asphalt	29	284	46	961	75	54	80	Strng	Good	0	25	**67**
18570	RICHEY RD	N 36TH AVE	N 37TH AVE	Local	Asphalt	38	316	67	1,401	62	50	80	Strng	Fair	4	35	**57**
18560	RICHEY RD	N 37TH AVE	DS@363W N 37TH AVE	Local	Asphalt	38	363	77	1609	66	49	80	Strng	Good	9	25	**59.1**
18550	RICHEY RD	DS@363W N 37TH AVE	DS@582W N 37TH AVE	Local	Asphalt	39	219	47	996	63	52	60	Mod	Fair	16	20	**58.5**
18480	RICHEY RD	DS@582W N 37TH AVE	N 40TH AVE	Local	Asphalt	39	439	95	1997	66	49	80	Strng	Good	14	20	**59.3**
18650	RICHEY RD	N 40TH AVE	DS@330W N 40TH AVE	Local	Asphalt	31	330	57	1,194	60	52	80	Strng	Fair	16	24	**57**
18630	RICHEY RD	DS@330W N 40TH AVE	N 42ND AVE	Local	Asphalt	30	326	54	1,141	55	53	60	Mod	Fair	21	24	**53**
18620	RICHEY RD	N 42ND AVE	DS@332W N 42ND AVE	Local	Asphalt	31	332	57	1,201	72	64	60	Mod	Good	6	22	**69**
18600	RICHEY RD	DS@332W N 42ND AVE	N 44TH AVE	Local	Asphalt	32	323	57	1,206	76	56	60	Mod	Good	6	18	**68**
18790	RICHEY RD	N 46TH AVE	DS@364W N 46TH AVE	Local	Asphalt	31	364	63	1,316	71	51	60	Mod	Good	12	17	**63**
18090	RICHEY RD	DS@364W N 46TH AVE	DS@724W N 46TH AVE	Local	Asphalt	31	360	62	1,302	72	64	60	Mod	Good	12	16	**69**
17150	RICHEY RD	DS@724W N 46TH AVE	N 49TH AVE	Local	Asphalt	30	305	51	1,068	77	66	60	Mod	V Good	9	13	**73**
17180	RICHEY RD	N 49TH AVE	DS@345W N 49TH AVE	Local	Asphalt	31	345	59	1,248	66	40	80	Strng	Fair	14	20	**56**
17610	RICHEY RD	DS@345W N 49TH AVE	RICHEY RD (CDS)	Local	Asphalt	31	167	29	604	66	42	80	Strng	Fair	9	24	**57**
18420	RICHEY RD	RICHEY RD (CDS)	DS@265W RICHEY RD (CDS)	Local	Asphalt	30	265	44	928	70	48	80	Strng	Good	9	21	**62**
18680	RICHEY RD	DS@265W RICHEY RD (CDS)	N 52ND AVE	Local	Asphalt	30	314	52	1,099	65	46	80	Strng	Fair	12	23	**58**
18700	RICHEY RD	N 52ND AVE	DS@346W N 52ND AVE	Local	Asphalt	32	346	62	1,292	73	52	80	Strng	Good	7	19	**65**
18580	RICHEY RD	DS@346W N 52ND AVE	DS@838W N 52ND AVE	Local	Asphalt	32	493	88	1,841	73	76	60	Mod	V Good	10	17	**73**
18530	RICHEY RD	DS@838W N 52ND AVE	N 55TH AVE	Local	Asphalt	31	330	57	1,194	72	75	60	Mod	V Good	8	20	**72**
17570	RICHEY RD	N 56TH AVE	N 57TH AVE	Local	Asphalt	30	341	57	1,194	60	41	80	Strng	Fair	9	31	**53**
17460	RICHEY RD	N 57TH AVE	N 58TH AVE	Local	Asphalt	31	327	56	1,183	73	52	80	Strng	Good	4	22	**65**
18040	RICHEY RD	N 74TH AVE	N 75TH AVE	Local	Asphalt	31	204	35	738	87	69	60	Mod	V Good	0	13	**80**
18000	RICHEY RD	N 75TH AVE	N 77TH AVE	Local	Asphalt	30	587	98	2,055	62	65	80	Strng	Good	7	30	**63**
18020	RICHEY RD	N 77TH AVE	N 78TH AVE	Local	Asphalt	30	270	45	945	64	67	60	Mod	Good	11	25	**64**
17620	RICHEY RD (CDS)	RICHEY RD	NW END	Local	Asphalt	38	217	45	951	61	30	80	Strng	Fair	9	30	**50**
16590	RIDGE CT	N 64TH AVE	DS@137W N 64TH AVE	Local	Asphalt	30	137	23	480	67	41	80	Strng	Fair	9	24	**57**
16570	RIDGE CT	DS@137W N 64TH AVE	N 66TH AVE	Local	Asphalt	30	516	86	1,806	73	64	60	Mod	Good	7	20	**69**
17870	RIDGE CT	N 64TH AVE	DS@207W N 64TH AVE	Local	Asphalt	30	207	35	725	71	52	80	Strng	Good	10	18	**64**
17840	RIDGE CT	DS@207W N 64TH AVE	WEST END	Local	Asphalt	30	140	23	486	71	48	80	Strng	Good	1	28	**63**
4180	RIVER RD	N 6TH AVE	DS@313W N 6TH AVE	Major Collector	Asphalt	36	313	63	1,315	88	69	60	Mod	V Good	7	6	**81**
4160	RIVER RD	DS@313W N 6TH AVE	DS@655W N 6TH AVE	Major Collector	Asphalt	36	342	68	1,436	96	87	60	Mod	Excellent	0	4	**92**
4140	RIVER RD	DS@655W N 6TH AVE	DS@929W N 6TH AVE	Major Collector	Asphalt	36	273	55	1,147	97	88	60	Mod	Excellent	0	3	**93**
4130	RIVER RD	DS@929W N 6TH AVE	DS@994W N 6TH AVE	Major Collector	Asphalt	36	65	13	273	86	67	60	Mod	V Good	7	7	**79**
4120	RIVER RD	DS@994W N 6TH AVE	DS@1372W N 6TH AVE	Major Collector	Asphalt	36	378	76	1,588	95	84	60	Mod	Excellent	0	5	**91**
4110	RIVER RD	DS@1372W N 6TH AVE	DS@2091W N 6TH AVE	Major Collector	Asphalt	36	719	144	3020	93	79	60	Mod	Excellent	0	7	**87.3**
4190	RIVER RD	DS@2091W N 6TH AVE	DS@2384W N 6TH AVE	Major Collector	Asphalt	37	293	60	1,265	92	78	60	Mod	Excellent	4	4	**87**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
4200	RIVER RD	DS@2384W N 6TH AVE	N 16TH AVE	Major Collector	Asphalt	39	245	53	1115	85	66	60	Mod	V Good	10	5	**77.8**
4220	RIVER RD	N 16TH AVE	DS@410W N 16TH AVE	Major Collector	Asphalt	38	410	87	1,818	85	67	60	Mod	V Good	0	15	**78**
3990	RIVER RD	DS@410W N 16TH AVE	DS@685W N 16TH AVE	Major Collector	Asphalt	39	275	60	1,251	89	70	60	Mod	V Good	2	9	**82**
4070	RIVER RD	DS@685W N 16TH AVE	DS@999W N 16TH AVE	Major Collector	Asphalt	38	314	66	1,392	93	80	60	Mod	Excellent	0	7	**88**
4060	RIVER RD	DS@999W N 16TH AVE	N 20TH AVE	Major Collector	Asphalt	38	348	73	1,543	86	68	60	Mod	V Good	5	9	**79**
4050	RIVER RD	N 20TH AVE	DS@232W N 20TH AVE	Major Collector	Asphalt	39	232	50	1,056	91	74	60	Mod	Excellent	0	9	**85**
4040	RIVER RD	DS@232W N 20TH AVE	N 21ST AVE	Major Collector	Asphalt	34	133	25	528	96	86	60	Mod	Excellent	0	5	**91**
4010	RIVER RD	N 21ST AVE	N 22ND AVE	Major Collector	Asphalt	36	327	65	1,373	92	78	60	Mod	Excellent	0	8	**87**
3960	RIVER RD	N 22ND AVE	N 23RD AVE	Major Collector	Asphalt	36	302	60	1,268	87	68	60	Mod	V Good	0	13	**80**
3950	RIVER RD	N 23RD AVE	DS@252W N 23RD AVE	Major Collector	Asphalt	39	252	55	1,147	87	68	60	Mod	V Good	0	14	**79**
3900	RIVER RD	DS@252W N 23RD AVE	N 25TH AVE	Major Collector	Asphalt	36	405	81	1701	87	68	60	Mod	V Good	4	10	**79.4**
3910	RIVER RD	N 25TH AVE	DS@176W N 25TH AVE	Major Collector	Asphalt	36	176	35	739	93	81	60	Mod	Excellent	0	7	**88.4**
3890	RIVER RD	DS@176W N 25TH AVE	N 26TH AVE	Major Collector	Asphalt	36	163	33	685	87	68	60	Mod	V Good	1	13	**80**
3870	RIVER RD	N 26TH AVE	N 27TH AVE	Major Collector	Asphalt	36	328	66	1378	91	72	60	Mod	V Good	0	9	**84**
3880	RIVER RD	N 27TH AVE	N 28TH AVE	Major Collector	Asphalt	38	330	70	1463	92	77	60	Mod	Excellent	0	8	**86.1**
3820	RIVER RD	N 28TH AVE	DS@391W N 28TH AVE	Major Collector	Asphalt	37	391	80	1688	88	69	60	Mod	V Good	0	12	**80.5**
3790	RIVER RD	DS@391W N 28TH AVE	DS@768W N 28TH AVE	Major Collector	Asphalt	38	376	79	1,667	83	65	60	Mod	V Good	9	8	**76**
3800	RIVER RD	DS@768W N 28TH AVE	DS@1004W N 28TH AVE	Major Collector	Asphalt	39	237	51	1078	92	76	60	Mod	Excellent	0	8	**85.8**
3840	RIVER RD	DS@1004W N 28TH AVE	N 32ND AVE	Major Collector	Asphalt	39	330	72	1502	93	81	60	Mod	Excellent	0	6	**88.6**
3860	RIVER RD	N 32ND AVE	FRUITVALE BLVD	Major Collector	Asphalt	36	694	139	2915	79	60	60	Mod	V Good	11	10	**71.9**
3930	RIVER RD	N 34TH AVE	N 35TH AVE	Local	Asphalt	36	487	97	2045	74	53	60	Mod	Good	16	10	**65.7**
3970	RIVER RD	N 35TH AVE	DS@189W N 35TH AVE	Local	Asphalt	40	189	42	882	99	97	60	Mod	Excellent	0	1	**97**
4020	RIVER RD	DS@189W N 35TH AVE	CHESTERLY DR	Local	Asphalt	41	349	79	1,669	100	99	60	Mod	Excellent	0	0	**99**
4080	RIVER RD	CHESTERLY DR	DS@650W CHESTERLY DR	Local	Asphalt	41	650	148	3,109	99	92	60	Mod	Excellent	0	1	**96**
4090	RIVER RD	DS@650W CHESTERLY DR	N 40TH AVE	Local	Asphalt	39	306	66	1,392	99	90	60	Mod	Excellent	0	2	**95**
23620	RIVERSIDE ST	CHALMERS ST	S 18TH ST	Local	Asphalt	27	328	49	1033	48	43	80	Strng	Marginal	28	25	**45**
50710	ROCK AVE	W NOB HILL BLVD	W PRASCH AVE	Local	Asphalt	30	661	110	2314	45	43	80	Strng	Marginal	30	26	**43.2**
52830	ROCK AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	32	665	118	2483	55	41	80	Strng	Fair	20	25	**49.1**
54850	ROCK AVE	W VIOLA AVE	W LOGAN AVE	Local	Asphalt	31	658	113	2380	63	45	80	Strng	Fair	14	22	**56.3**
56390	ROCK AVE	W LOGAN AVE	W MEAD AVE	Local	Asphalt	31	673	116	2434	73	51	80	Strng	Good	3	24	**64.5**
56970	ROCK AVE	W MEAD AVE	DS@253S W MEAD AVE	Local	Asphalt	32	253	45	945	66	39	80	Strng	Fair	8	27	**56**
57870	ROCK AVE	DS@253S W MEAD AVE	W KING ST	Local	Asphalt	32	414	74	1,546	68	49	80	Strng	Good	6	26	**61**
59060	ROCK AVE	W KING ST	W PIERCE ST	Local	Asphalt	27	664	100	2,092	70	47	60	Mod	Good	17	13	**61**
15940	ROOSEVELT AVE	N 6TH AVE	OREGON AVE	Local	Asphalt	31	471	81	1,703	73	51	60	Mod	Good	13	14	**64**
15960	ROOSEVELT AVE	OREGON AVE	CUSTER AVE	Local	Asphalt	31	474	82	1,714	69	47	80	Strng	Good	13	18	**60**
15980	ROOSEVELT AVE	CUSTER AVE	CLARKE AVE	Local	Asphalt	31	456	79	1,649	75	55	80	Strng	Good	5	19	**68**
16000	ROOSEVELT AVE	CLARKE AVE	LEWIS AVE	Local	Asphalt	31	449	77	1,624	69	49	80	Strng	Good	12	18	**62**
16020	ROOSEVELT AVE	LEWIS AVE	N 16TH AVE	Local	Asphalt	32	807	143	3,013	68	53	80	Strng	Good	10	21	**63**
16080	ROOSEVELT AVE	N 18TH AVE	DS@257W N 18TH AVE	Local	Asphalt	25	257	36	750	86	67	60	Mod	V Good	3	11	**79**
16060	ROOSEVELT AVE	DS@257W N 18TH AVE	N 20TH AVE	Local	Asphalt	25	408	57	1,190	82	67	60	Mod	V Good	3	15	**76**
15840	ROOSEVELT AVE	EAST END	DS@350W EAST END	Local	Asphalt	16	350	31	653	70	47	80	Strng	Good	5	25	**62**
15850	ROOSEVELT AVE	DS@350W EAST END	N 35TH AVE	Local	Asphalt	31	340	59	1,230	38	48	80	Strng	Marginal	31	31	**40**
46000	ROSE PL	S 34TH AVE	DS@722S S 34TH AVE	Local	Asphalt	31	722	124	2611	62	57	60	Mod	Good	20	18	**59.1**
47350	ROSE PL	DS@722S S 34TH AVE	DS@1166S S 34TH AVE	Local	Asphalt	32	444	79	1,658	75	54	60	Mod	Good	8	17	**67**
47360	ROSE PL	DS@1166S S 34TH AVE	S 36TH AVE	Local	Asphalt	30	162	27	567	82	63	60	Mod	V Good	6	12	**75**
53680	ROYER LN	S 13TH AVE	S 14TH AVE	Local	Asphalt	23	324	41	869	83	64	60	Mod	V Good	6	11	**76**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
53700	ROYER LN	S 14TH AVE	S 15TH AVE	Local	Asphalt	21	322	38	789	47	59	80	Strng	Fair	16	37	**50**
75840	RUBY WY	CRESTFIELDS RD	LYONS LN	Local	Asphalt	29	377	61	1276	97	88	60	Mod	Excellent	0	3	**92.8**
55120	RUDKIN RD	E VIOLA AVE	DS@684S E VIOLA AVE	Major Collector	Asphalt	38	684	144	3,032	45	23	80	Strng	Poor	36	19	**36**
55470	RUDKIN RD	DS@684S E VIOLA AVE	DS@1012S E VIOLA AVE	Major Collector	Asphalt	37	328	67	1,416	56	21	80	Strng	Marginal	26	19	**43**
56800	RUDKIN RD	DS@1012S E VIOLA AVE	E MEAD AVE	Major Collector	Asphalt	37	331	68	1429	68	44	80	Strng	Good	14	17	**59.1**
60050	RUSSELL LN	FORNEY RD	DS@314E FORNEY RD	Local	Asphalt	30	314	52	1099	88	69	60	Mod	V Good	7	6	**80.8**
60060	RUSSELL LN	DS@314E FORNEY RD	DS@660E FORNEY RD	Local	Asphalt	27	346	52	1,090	90	76	60	Mod	Excellent	9	2	**84**
60080	RUSSELL LN	DS@660E FORNEY RD	S 1ST ST	Local	Asphalt	28	578	90	1,888	40	70	80	Strng	Fair	7	28	**49**
2460	S ST	WEST END	N 3RD ST	Local	Asphalt	24	322	43	902	13	57	80	Strng	Poor	32	56	**27**
2480	S ST	N 3RD ST	N 4TH ST	Local	Asphalt	26	348	50	1,056	34	53	80	Strng	Marginal	31	35	**39**
2490	S ST	N 4TH ST	N 6TH ST	Local	Asphalt	33	346	63	1,332	81	62	60	Mod	V Good	7	12	**74**
23790	SADDLEBROOK CT	SADDLEBROOK DR	NW END	Local	Asphalt	38	290	61	1,290	74	53	80	Strng	Good	3	23	**66**
23840	SADDLEBROOK DR	N 73RD AVE	SADDLEBROOK CT	Local	Asphalt	29	159	26	538	61	68	60	Mod	Good	12	27	**62**
23800	SADDLEBROOK DR	SADDLEBROOK CT	N 74TH AVE	Local	Asphalt	29	258	42	873	55	56	80	Strng	Fair	16	30	**54**
76070	SADDLEBROOK LOOP	N 74TH AVE	DS@136W N 74TH AVE	Other	Asphalt	29	136	22	460	63	33	80	Strng	Fair	19	18	**52**
76080	SADDLEBROOK LOOP	DS@136W N 74TH AVE	SADDLEBROOK LOOP	Other	Asphalt	30	1,033	172	3,616	94	83	60	Mod	Excellent	0	6	**89**
35030	SAINT ANDREWS PL	TORREY PINES LN	W WALNUT ST	Local	Asphalt	29	430	69	1,455	70	60	60	Mod	Good	8	22	**66**
43340	SAINT HELENS ST	S 3RD AVE	DS@159W S 3RD AVE	Local	Asphalt	22	159	19	408	84	65	60	Mod	V Good	0	16	**77**
43350	SAINT HELENS ST	DS@159W S 3RD AVE	S 4TH AVE	Local	Asphalt	23	165	21	443	88	69	60	Mod	V Good	0	12	**82**
43390	SAINT HELENS ST	S 4TH AVE	DS@165W S 4TH AVE	Local	Asphalt	22	165	20	424	89	70	60	Mod	V Good	0	11	**82**
43410	SAINT HELENS ST	DS@165W S 4TH AVE	S 5TH AVE	Local	Asphalt	23	166	21	445	92	78	60	Mod	Excellent	0	8	**87**
43430	SAINT HELENS ST	S 5TH AVE	DS@165W S 5TH AVE	Local	Asphalt	22	165	20	424	62	33	80	Strng	Fair	19	18	**52**
43400	SAINT HELENS ST	DS@165W S 5TH AVE	S 6TH AVE	Local	Asphalt	22	164	20	421	94	83	60	Mod	Excellent	0	6	**90**
43440	SAINT HELENS ST	S 6TH AVE	DS@166W S 6TH AVE	Local	Asphalt	22	166	20	426	84	65	60	Mod	V Good	0	16	**77**
43450	SAINT HELENS ST	DS@166W S 6TH AVE	CORNELL AVE	Local	Asphalt	23	157	20	421	87	68	60	Mod	V Good	0	14	**79**
43290	SAINT HELENS ST	EAST END	S 8TH AVE	Local	Asphalt	23	191	24	513	59	58	60	Mod	Fair	27	15	**57**
43310	SAINT HELENS ST	S 8TH AVE	DS@188W S 8TH AVE	Local	Asphalt	22	188	23	483	66	46	80	Strng	Fair	15	19	**58**
43320	SAINT HELENS ST	DS@188W S 8TH AVE	S 9TH AVE	Local	Asphalt	23	187	24	502	80	61	60	Mod	V Good	9	11	**73**
43270	SAINT HELENS ST	S 10TH AVE	DS@154W S 10TH AVE	Local	Asphalt	21	154	18	377	85	66	60	Mod	V Good	0	15	**78**
43230	SAINT HELENS ST	DS@154W S 10TH AVE	S 11TH AVE	Local	Asphalt	22	156	19	400	75	55	80	Strng	Good	3	22	**67.8**
43170	SAINT HELENS ST	S 11TH AVE	DS@153W S 11TH AVE	Local	Asphalt	23	153	20	411	65	38	80	Strng	Fair	13	21	**54.9**
43150	SAINT HELENS ST	DS@153W S 11TH AVE	PLEASANT AVE	Local	Asphalt	23	167	21	448	80	61	60	Mod	V Good	9	12	**72.3**
43180	SAINT HELENS ST	PLEASANT AVE	DS@169W PLEASANT AVE	Local	Asphalt	23	169	22	453	77	57	80	Strng	V Good	0	23	**69.6**
43190	SAINT HELENS ST	DS@169W PLEASANT AVE	QUEEN AVE	Local	Asphalt	23	165	21	443	81	62	60	Mod	V Good	6	13	**73.9**
43240	SAINT HELENS ST	QUEEN AVE	DS@166W QUEEN AVE	Local	Asphalt	24	166	22	465	78	66	80	Strng	V Good	0	22	**73.5**
43250	SAINT HELENS ST	DS@166W QUEEN AVE	S 12TH AVE	Local	Asphalt	23	161	21	432	76	56	60	Mod	Good	10	14	**68**
43120	SAINT HELENS ST	S 12TH AVE	DS@154W S 12TH AVE	Local	Asphalt	24	154	21	431	49	31	80	Strng	Marginal	27	25	**42**
42960	SAINT HELENS ST	DS@154W S 12TH AVE	S 13TH AVE	Local	Asphalt	22	164	20	421	63	34	80	Strng	Fair	16	20	**52.6**
43010	SAINT HELENS ST	S 13TH AVE	DS@166W S 13TH AVE	Local	Asphalt	23	166	21	445	75	54	80	Strng	Good	3	22	**67.1**
43020	SAINT HELENS ST	DS@166W S 13TH AVE	S 14TH AVE	Local	Asphalt	23	161	21	432	76	56	60	Mod	Good	7	17	**68.2**
43000	SAINT HELENS ST	S 14TH AVE	DS@169W S 14TH AVE	Local	Asphalt	22	169	21	434	81	62	80	Strng	V Good	0	19	**74.1**
43030	SAINT HELENS ST	DS@169W S 14TH AVE	S 15TH AVE	Local	Asphalt	22	164	20	421	79	60	60	Mod	V Good	5	16	**71.9**
43050	SAINT HELENS ST	S 15TH AVE	DS@165W S 15TH AVE	Local	Asphalt	21	165	19	404	83	64	60	Mod	V Good	0	17	**75.7**
43060	SAINT HELENS ST	DS@165W S 15TH AVE	S 16TH AVE	Local	Asphalt	22	166	20	426	82	63	60	Mod	V Good	7	11	**75**
43520	SAINT HELENS ST	S 20TH AVE	DS@275W S 20TH AVE	Local	Asphalt	22	275	34	706	59	43	80	Strng	Fair	14	27	**52.6**
43490	SAINT HELENS ST	DS@275W S 20TH AVE	S 22ND AVE	Local	Asphalt	22	381	47	978	56	50	80	Strng	Fair	19	25	**52.6**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
42660	SAINT HELENS ST	S 22ND AVE	DS@165W S 22ND AVE	Local	Asphalt	19	165	17	366	37	46	80	Strng	Marginal	34	29	**39.3**
42590	SAINT HELENS ST	DS@165W S 22ND AVE	DS@259W S 22ND AVE	Local	Asphalt	18	94	9	197	44	39	80	Strng	Marginal	25	32	**41.1**
42560	SAINT HELENS ST	DS@259W S 22ND AVE	WEST END	Local	Asphalt	19	73	8	162	39	33	80	Strng	Poor	35	26	**35.7**
43090	SAINT HELENS ST	S 24TH AVE	DS@171W S 24TH AVE	Local	Asphalt	24	171	23	479	71	48	80	Strng	Good	5	24	**62.7**
42640	SAINT HELENS ST	DS@171W S 24TH AVE	S 25TH AVE	Local	Asphalt	23	168	21	451	71	51	80	Strng	Good	7	23	**63.2**
58400	SAINT JOHNS ST	PLEASANT AVE	S 12TH AVE	Local	Asphalt	28	669	104	2185	76	63	60	Mod	V Good	7	17	**71.1**
7170	SCENIC DR	N SCENIC DR	DS@673S N SCENIC DR	Local	Asphalt	22	673	82	1727	61	58	80	Strng	Good	8	15	**59.1**
7990	SCENIC DR	DS@673S N SCENIC DR	SW END	Local	Asphalt	21	540	63	1323	94	81	60	Mod	Excellent	0	7	**88.7**
4970	SCENIC DR	FELLOWS DR	DS@305W FELLOWS DR	Local	Asphalt	29	305	49	1032	59	59	80	Strng	Fair	9	32	**58**
5150	SCENIC DR	DS@305W FELLOWS DR	HILLTOP WY	Local	Asphalt	22	413	50	1060	59	49	80	Strng	Fair	9	31	**54.9**
71470	SCENIC DR	HILLTOP WY	FECHTER RD	Local	Asphalt	22	764	93	1961	91	73	60	Mod	Excellent	9	0	**84.4**
5870	SCENIC DR	FECHTER RD	DS@507N FECHTER RD	Local	Asphalt	23	507	65	1360	47	59	80	Strng	Fair	18	35	**50**
5110	SCENIC DR	DS@507N FECHTER RD	HILLTOP WY	Local	Asphalt	23	392	50	1052	63	55	80	Strng	Good	12	25	**59.3**
5790	SCENIC DR	HILLTOP WY	DS@625S HILLTOP WY	Local	Asphalt	27	625	94	1969	41	38	80	Strng	Marginal	27	31	**39.3**
9120	SCENIC DR	N 66TH AVE	N 67TH AVE	Local	Asphalt	32	330	59	1232	75	61	60	Mod	V Good	9	16	**69.4**
9090	SCENIC DR	N 67TH AVE	N 68TH AVE	Local	Asphalt	30	326	54	1141	76	80	60	Mod	V Good	3	21	**76.6**
9070	SCENIC DR	N 68TH AVE	DS@627W N 68TH AVE	Local	Asphalt	27	627	94	1975	78	67	60	Mod	V Good	5	17	**73.7**
9000	SCENIC DR	DS@627W N 68TH AVE	RAVENS GATE WY	Local	Asphalt	37	444	91	1917	86	67	60	Mod	V Good	1	13	**79**
8100	SCENIC DR	RAVENS GATE WY	SCENIC CANYON LN	Local	Asphalt	36	846	169	3553	73	66	60	Mod	V Good	12	15	**69.8**
8970	SCENIC DR	CITY LIMIT	N 80TH AVE	Local	Asphalt	23	1175	150	3153	86	71	60	Mod	V Good	5	9	**80.7**
57040	SCOTT CT	S 70TH AVE	NW END	Local	Asphalt	44	137	34	708	55	59	80	Strng	Fair	18	28	**54.9**
6980	SEATTLE SLEW RUN	CASTLEVALE RD	NE END	Local	Asphalt	32	330	58	1,221	50	50	80	Strng	Marginal	19	31	**49**
28020	SHAMROCK DR, E	N SHAMROCK DR, W	SUMMITVIEW AVE	Local	Asphalt	30	543	91	1901	69	48	80	Strng	Good	6	25	**60.9**
29140	SHAMROCK DR, W	SOUTH END	N SHAMROCK DR, E	Local	Asphalt	33	274	51	1069	60	44	80	Strng	Fair	8	33	**53.5**
28000	SHAMROCK DR, W	N SHAMROCK DR, E	SUMMITVIEW AVE	Local	Asphalt	31	465	80	1682	65	42	80	Strng	Fair	9	25	**56.3**
27870	SHARON WY	EAST END	CORRIGAN WY	Local	Asphalt	23	241	31	647	46	19	80	Strng	Poor	23	31	**35.7**
27890	SHARON WY	CORRIGAN WY	N 34TH AVE	Local	Asphalt	21	133	16	326	41	17	80	Strng	Poor	35	24	**31.7**
40250	SHELTON AVE	S 27TH AVE	DS@384W S 27TH AVE	Local	Asphalt	29	384	62	1299	61	49	80	Strng	Fair	12	27	**56**
40310	SHELTON AVE	DS@384W S 27TH AVE	DS@692W S 27TH AVE	Local	Asphalt	32	309	55	1,154	71	58	60	Mod	Good	9	19	**66**
40340	SHELTON AVE	DS@692W S 27TH AVE	S 30TH AVE	Local	Asphalt	29	323	52	1,093	77	62	60	Mod	V Good	3	20	**71**
53860	SIMPSON LN	S 18TH ST	S 19TH ST	Local	Asphalt	23	330	42	886	90	70	60	Mod	V Good	5	5	**83**
53910	SIMPSON LN	S 19TH ST	S 20TH ST	Local	Asphalt	28	328	51	1,071	93	80	60	Mod	Excellent	5	2	**88**
53890	SIMPSON LN	S 13TH ST	S 14TH ST	Local	Asphalt	29	333	54	1,127	89	70	60	Mod	V Good	6	5	**82**
53810	SIMPSON LN	S 14TH ST	S 15TH ST	Local	Asphalt	26	332	48	1,007	81	63	60	Mod	V Good	5	14	**74**
53790	SIMPSON LN	S 15TH ST	S 16TH ST	Local	Asphalt	22	332	41	852	69	69	80	Strng	Good	4	28	**68**
53840	SIMPSON LN	S 16TH ST	S 17TH ST	Local	Asphalt	23	332	42	891	70	63	80	Strng	Good	6	25	**66.6**
53880	SIMPSON LN	S 17TH ST	S 18TH ST	Local	Asphalt	23	332	42	891	72	49	80	Strng	Good	7	21	**63.5**
53770	SIMPSON LN	S FAIR AVE	EAST END	Local	Asphalt	21	549	64	1345	38	64	80	Strng	Marginal	3	33	**45.6**
23150	SKYLINE AVE	N 66TH AVE	N 67TH PL	Local	Asphalt	32	179	32	668	46	27	80	Strng	Poor	17	36	**39**
23130	SKYLINE AVE	N 67TH PL	WEST END	Local	Asphalt	34	466	88	1,848	46	44	80	Strng	Marginal	16	38	**44**
22810	SKYLINE WY	N 76TH AVE	N 77TH AVE	Local	Asphalt	28	350	54	1,143	82	63	60	Mod	V Good	10	8	**75**
22820	SKYLINE WY	EAST END	N 80TH AVE	Local	Asphalt	33	238	44	918	49	20	80	Strng	Poor	21	30	**38**
47220	SLIGER RD	S 18TH ST	DS@364E S 18TH ST	Local	Asphalt	30	364	61	1,274	56	39	80	Strng	Fair	13	13	**49**
47240	SLIGER RD	DS@364E S 18TH ST	EAST END	Local	Asphalt	27	301	45	948	30	71	80	Strng	Marginal	26	3	**43**
17060	SNOW MASS LN	SOUTH END	ENGLEWOOD AVE	Local	Asphalt	14	833	65	1,361	22	37	60	Mod	Poor	51	27	**26**
24220	SNOWMOUNTAIN RD	N 41ST AVE	N 42ND AVE	Local	Asphalt	28	311	48	1,016	70	52	60	Mod	Good	13	17	**63**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
24230	SNOWMOUNTAIN RD	N 42ND AVE	DS@277W N 42ND AVE	Local	Asphalt	30	277	46	970	83	66	60	Mod	V Good	4	13	**76**
24240	SNOWMOUNTAIN RD	DS@277W N 42ND AVE	N 44TH AVE	Local	Asphalt	31	356	61	1,288	80	61	60	Mod	V Good	8	12	**73**
24260	SNOWMOUNTAIN RD	N 44TH AVE	DS@538W N 44TH AVE	Local	Asphalt	29	538	87	1,820	71	49	80	Strng	Good	8	20	**63**
24170	SNOWMOUNTAIN RD	DS@538W N 44TH AVE	N 46TH AVE	Local	Asphalt	30	437	73	1,530	65	49	80	Strng	Fair	14	21	**58**
23540	SNOWMOUNTAIN RD	N 46TH AVE	DS@112W N 46TH AVE	Local	Asphalt	30	112	19	392	54	49	80	Strng	Fair	18	28	**51.5**
23420	SNOWMOUNTAIN RD	DS@112W N 46TH AVE	DS@420W N 46TH AVE	Local	Asphalt	29	308	50	1042	78	66	60	Mod	V Good	7	15	**73.3**
23270	SNOWMOUNTAIN RD	DS@420W N 46TH AVE	DS@684W N 46TH AVE	Local	Asphalt	29	264	43	893	70	65	80	Strng	Good	5	25	**67**
23260	SNOWMOUNTAIN RD	DS@684W N 46TH AVE	AVALANCHE AVE	Local	Asphalt	30	384	64	1344	76	66	60	Mod	V Good	3	21	**72.1**
63700	SORENSON RD	S 36TH AVE	S 38TH AVE	Local	Asphalt	38	688	145	3,050	100	90	60	Mod	Excellent	0	0	**96**
60000	SPOKANE ST	CORNELL AVE	S 7TH AVE	Local	Asphalt	20	336	37	784	79	60	60	Mod	V Good	7	14	**71.7**
59980	SPOKANE ST	S 7TH AVE	S 8TH AVE	Local	Asphalt	23	325	42	872	79	60	60	Mod	V Good	7	13	**72**
59940	SPOKANE ST	S 8TH AVE	S 9TH AVE	Local	Asphalt	26	330	48	1,001	72	52	80	Strng	Good	9	19	**65**
59960	SPOKANE ST	S 9TH AVE	S 10TH AVE	Local	Asphalt	27	323	48	1,017	80	61	60	Mod	V Good	9	11	**73**
59920	SPOKANE ST	S 10TH AVE	S 11TH AVE	Local	Asphalt	31	327	56	1,183	77	71	60	Mod	V Good	12	11	**74**
59900	SPOKANE ST	S 11TH AVE	PLEASANT AVE	Local	Asphalt	31	341	59	1,233	81	62	60	Mod	V Good	10	9	**74**
59660	SPOKANE ST	S 12TH AVE	DS@332W S 12TH AVE	Local	Asphalt	29	332	53	1,123	100	90	60	Mod	Excellent	0	0	**96**
59690	SPOKANE ST	DS@332W S 12TH AVE	S 14TH AVE	Local	Asphalt	29	321	52	1,086	100	90	60	Mod	Excellent	0	0	**96**
59870	SPOKANE ST	S 15TH AVE	S 16TH AVE	Local	Asphalt	16	298	26	556	100	90	60	Mod	Excellent	0	0	**95.6**
59800	SPOKANE ST	S 71ST AVE	S 72ND AVE	Local	Asphalt	34	161	30	639	77	58	80	Strng	V Good	0	23	**70**
59760	SPOKANE ST	S 72ND AVE	S 73RD AVE	Local	Asphalt	30	281	47	984	64	53	80	Strng	Good	0	36	**59.6**
59740	SPOKANE ST	S 73RD AVE	S 74TH AVE	Local	Asphalt	29	257	41	870	60	84	80	Strng	Good	0	40	**67.3**
59720	SPOKANE ST	S 74TH AVE	CONOVER DR	Local	Asphalt	28	425	66	1388	61	65	80	Strng	Good	5	33	**61.7**
22170	SPRUCE ST	S FAIR AVE	DS@331E S FAIR AVE	Local	Asphalt	28	331	51	1081	54	48	80	Strng	Fair	21	24	**51.2**
22160	SPRUCE ST	DS@331E S FAIR AVE	DS@598E S FAIR AVE	Local	Asphalt	29	267	43	903	66	47	80	Strng	Good	2	31	**59.1**
22200	SPRUCE ST	DS@598E S FAIR AVE	DS@944E S FAIR AVE	Local	Asphalt	28	346	54	1,130	70	49	80	Strng	Good	4	26	**63**
22190	SPRUCE ST	DS@944E S FAIR AVE	EAST END	Local	Asphalt	22	93	11	239	71	49	80	Strng	Good	0	29	**63**
23340	SPRUCE ST	S 8TH ST	UNION ST	Local	Asphalt	32	115	20	429	82	64	60	Mod	V Good	0	18	**75**
23360	SPRUCE ST	UNION ST	DS@339E UNION ST	Local	Asphalt	24	339	45	949	72	70	60	Mod	V Good	13	15	**71**
23370	SPRUCE ST	DS@339E UNION ST	S 9TH ST	Local	Asphalt	23	162	21	435	75	57	80	Strng	Good	0	25	**69**
23400	SPRUCE ST	S 9TH ST	DS@167E S 9TH ST	Local	Asphalt	23	167	21	448	85	69	60	Mod	V Good	0	15	**79**
23390	SPRUCE ST	DS@167E S 9TH ST	S 10TH ST	Local	Asphalt	24	163	22	456	84	65	60	Mod	V Good	5	11	**77**
23410	SPRUCE ST	S 10TH ST	S 10TH ST	Local	Asphalt	24	167	22	468	81	63	60	Mod	V Good	5	14	**73.9**
23450	SPRUCE ST	S 10TH ST	DS@182E S 10TH ST	Local	Asphalt	24	182	24	510	88	69	60	Mod	V Good	0	12	**81**
23440	SPRUCE ST	DS@182E S 10TH ST	S FAIR AVE	Local	Asphalt	24	164	22	459	80	61	80	Strng	V Good	0	20	**73.5**
25270	SPRUCE ST	S 6TH ST	DS@201E S 6TH ST	Local	Asphalt	33	201	37	774	92	76	60	Mod	Excellent	0	8	**85.8**
24660	SPRUCE ST	DS@201E S 6TH ST	S 7TH ST	Local	Asphalt	32	190	34	709	86	67	60	Mod	V Good	0	14	**79**
24560	SPRUCE ST	S 7TH ST	DS@188E S 7TH ST	Local	Asphalt	32	188	33	702	78	58	60	Mod	V Good	9	13	**70**
24200	SPRUCE ST	DS@188E S 7TH ST	S 8TH ST	Local	Asphalt	32	185	33	691	84	66	60	Mod	V Good	0	16	**77.5**
27560	SPRUCE ST	S 3RD ST	DS@200E S 3RD ST	Local	Asphalt	39	200	43	910	67	48	80	Strng	Good	13	19	**59.9**
27240	SPRUCE ST	DS@200E S 3RD ST	S 4TH ST	Local	Asphalt	39	199	43	905	83	64	60	Mod	V Good	6	11	**76**
26910	SPRUCE ST	S 4TH ST	DS@200E S 4TH ST	Local	Asphalt	40	200	44	933	71	53	60	Mod	Good	12	17	**64**
26670	SPRUCE ST	DS@200E S 4TH ST	S NACHES AVE	Local	Asphalt	40	222	49	1036	83	65	60	Mod	V Good	0	17	**76.3**
26210	SPRUCE ST	S NACHES AVE	DS@219E S NACHES AVE	Local	Asphalt	32	219	39	818	78	62	80	Strng	V Good	1	21	**72.3**
25500	SPRUCE ST	DS@219E S NACHES AVE	S 6TH ST	Local	Asphalt	32	199	35	743	83	65	60	Mod	V Good	0	17	**76**
28780	SPRUCE ST	S 1ST ST	DS@200E S 1ST ST	Local	Asphalt	39	200	43	910	69	44	60	Mod	Good	16	16	**59.3**
28370	SPRUCE ST	DS@200E S 1ST ST	S 2ND ST	Local	Asphalt	40	199	44	929	81	62	80	Strng	V Good	0	19	**74**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
28170	SPRUCE ST	S 2ND ST	DS@201E S 2ND ST	Local	Asphalt	40	201	45	938	81	62	60	Mod	V Good	4	15	**74**
27900	SPRUCE ST	DS@201E S 2ND ST	S 3RD ST	Local	Asphalt	39	199	43	905	69	45	80	Strng	Good	12	19	**59.9**
31210	SPRUCE ST	S 2ND AVE	DS@195W S 2ND AVE	Local	Asphalt	49	195	53	1,115	67	53	80	Strng	Good	6	27	**62**
31380	SPRUCE ST	DS@195W S 2ND AVE	S 3RD AVE	Local	Asphalt	48	202	54	1,131	62	44	80	Strng	Fair	14	25	**55**
31550	SPRUCE ST	S 3RD AVE	DS@198W S 3RD AVE	Local	Asphalt	49	198	54	1,132	61	61	80	Strng	Good	10	29	**60**
32110	SPRUCE ST	DS@198W S 3RD AVE	S 4TH AVE	Local	Asphalt	48	209	56	1170	71	54	80	Strng	Good	5	24	**64.5**
32390	SPRUCE ST	S 4TH AVE	DS@193W S 4TH AVE	Local	Asphalt	48	193	51	1,081	74	69	60	Mod	V Good	8	18	**71**
33090	SPRUCE ST	DS@193W S 4TH AVE	S 5TH AVE	Local	Asphalt	49	202	55	1,155	45	54	80	Strng	Marginal	24	32	**46**
33540	SPRUCE ST	S 5TH AVE	WEST END	Local	Asphalt	49	204	56	1,166	55	39	80	Strng	Marginal	23	22	**49**
34540	SPRUCE ST	DS@194W S 7TH AVE	S 8TH AVE	Local	Asphalt	29	193	31	653	33	42	80	Strng	Poor	36	31	**35**
34710	SPRUCE ST	S 8TH AVE	DS@189W S 8TH AVE	Local	Asphalt	28	189	29	617	55	48	80	Strng	Fair	22	23	**52**
34970	SPRUCE ST	DS@189W S 8TH AVE	S 9TH AVE	Local	Asphalt	30	190	32	665	72	61	60	Mod	Good	8	20	**67.6**
35150	SPRUCE ST	S 9TH AVE	DS@189W S 9TH AVE	Local	Asphalt	28	189	29	617	66	44	80	Strng	Fair	9	25	**57**
35510	SPRUCE ST	DS@189W S 9TH AVE	S 10TH AVE	Local	Asphalt	28	186	29	608	64	56	80	Strng	Good	12	24	**60**
36260	SPRUCE ST	S 10TH AVE	DS@186W S 10TH AVE	Local	Asphalt	29	186	30	629	33	35	80	Strng	Poor	29	38	**33**
36480	SPRUCE ST	DS@186W S 10TH AVE	S 11TH AVE	Local	Asphalt	29	196	32	663	39	42	80	Strng	Marginal	34	27	**39.6**
36540	SPRUCE ST	S 11TH AVE	DS@189W S 11TH AVE	Local	Asphalt	44	189	46	970	61	30	80	Strng	Fair	15	24	**49.7**
36640	SPRUCE ST	DS@189W S 11TH AVE	HOLTON AVE	Local	Asphalt	36	179	36	752	58	48	80	Strng	Fair	17	25	**54**
36650	SPRUCE ST	HOLTON AVE	S 12TH AVE	Local	Asphalt	30	285	48	998	55	33	80	Strng	Marginal	22	23	**47**
36670	SPRUCE ST	S 12TH AVE	DS@171W S 12TH AVE	Local	Asphalt	28	171	27	559	69	44	80	Strng	Good	6	26	**60**
36630	SPRUCE ST	DS@171W S 12TH AVE	S 13TH AVE	Local	Asphalt	30	170	28	595	66	40	80	Strng	Fair	12	22	**57**
36800	SPRUCE ST	S 13TH AVE	DS@169W S 13TH AVE	Local	Asphalt	28	169	26	552	92	76	60	Mod	Excellent	0	8	**86**
36810	SPRUCE ST	DS@169W S 13TH AVE	S 14TH AVE	Local	Asphalt	21	177	21	434	78	59	60	Mod	V Good	6	16	**71**
29200	SPURCE ST	S FRONT ST	DS@186E S FRONT ST	Local	Concrete	41	186	42	890	61	36	60	Mod	Fair	0	0	**52**
28950	SPURCE ST	DS@186E S FRONT ST	S 1ST ST	Local	Concrete	41	196	45	938	68	44	60	Mod	Good	0	0	**60**
41830	STACY LN	S 74TH AVE	S 75TH AVE	Local	Asphalt	30	213	36	746	69	45	80	Strng	Good	5	26	**60.4**
14880	STAFF SGT PENDLETON WAY	N 10TH ST	N 11TH ST	Local	Asphalt	33	541	99	2,083	73	68	60	Mod	V Good	4	22	**71**
16220	STAFF SGT PENDLETON WAY	N 8TH ST	DS@186E N 8TH ST	Local	Asphalt	30	186	31	651	66	38	80	Strng	Fair	9	26	**56**
16100	STAFF SGT PENDLETON WAY	DS@186E N 8TH ST	N 9TH ST	Local	Asphalt	49	193	53	1,103	72	51	80	Strng	Good	7	20	**65**
15710	STAFF SGT PENDLETON WAY	N 9TH ST	DS@189E N 9TH ST	Local	Asphalt	46	189	48	1,014	53	48	80	Strng	Fair	11	36	**51**
15250	STAFF SGT PENDLETON WAY	DS@189E N 9TH ST	N 10TH ST	Local	Asphalt	30	104	17	364	55	47	80	Strng	Fair	6	39	**51.8**
17020	STAFF SGT PENDLETON WAY	N 6TH ST	EAST END	Local	Asphalt	28	201	31	657	60	36	80	Strng	Fair	14	25	**51.2**
20380	STAFF SGT PENDLETON WAY	N 1ST ST	DS@196E N 1ST ST	Local	Asphalt	50	196	54	1,143	55	41	80	Strng	Fair	15	30	**49**
19850	STAFF SGT PENDLETON WAY	DS@196E N 1ST ST	N 2ND ST	Local	Asphalt	50	203	56	1184	45	43	80	Strng	Marginal	24	31	**43.5**
19440	STAFF SGT PENDLETON WAY	N 2ND ST	DS@206E N 2ND ST	Local	Asphalt	50	206	57	1202	40	54	80	Strng	Marginal	25	35	**43.8**
19150	STAFF SGT PENDLETON WAY	DS@206E N 2ND ST	N 3RD ST	Local	Asphalt	50	195	54	1138	44	47	80	Strng	Marginal	24	32	**44.1**
19040	STAFF SGT PENDLETON WAY	N 3RD ST	DS@203E N 3RD ST	Local	Asphalt	58	203	65	1374	51	43	80	Strng	Marginal	9	39	**47.6**
18810	STAFF SGT PENDLETON WAY	DS@203E N 3RD ST	N 4TH ST	Local	Asphalt	58	199	64	1347	62	62	80	Strng	Good	6	32	**61.2**
18400	STAFF SGT PENDLETON WAY	N 4TH ST	DS@198E N 4TH ST	Local	Asphalt	56	198	62	1,294	36	48	80	Strng	Marginal	29	35	**39**
17880	STAFF SGT PENDLETON WAY	DS@198E N 4TH ST	N NACHES AVE	Local	Asphalt	58	221	71	1,495	44	53	80	Strng	Marginal	22	35	**46**
17670	STAFF SGT PENDLETON WAY	N NACHES AVE	DS@221E N NACHES AVE	Local	Asphalt	48	221	59	1238	71	49	80	Strng	Good	8	21	**63**
17380	STAFF SGT PENDLETON WAY	DS@221E N NACHES AVE	N 6TH ST	Local	Asphalt	30	198	33	693	61	34	80	Strng	Fair	5	35	**51**
20810	STAFF SGT PENDLETON WAY	DS@187E N FRONT ST	N 1ST ST	Local	Asphalt	52	199	57	1207	81	62	80	Strng	V Good	0	19	**73.7**
34760	STANLEY BLVD	W CHESTNUT AVE	LABAN AVE	Local	Asphalt	20	425	47	992	61	43	80	Strng	Fair	20	19	**53.8**
36600	STANLEY BLVD	LABAN AVE	DS@538S LABAN AVE	Local	Asphalt	21	538	63	1,318	67	66	60	Mod	Good	13	21	**65**
36720	STANLEY BLVD	DS@538S LABAN AVE	S 23RD AVE	Local	Asphalt	21	248	29	608	55	34	80	Strng	Marginal	15	30	**47**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
41020	STERLING CT	EAST END	S 69TH AVE	Local	Asphalt	48	135	36	753	48	41	80	Strng	Marginal	16	36	**45**
46750	STEWART ST	LANDON AVE	DS@163W LANDON AVE	Local	Asphalt	22	163	20	418	87	68	60	Mod	V Good	0	14	**79.4**
46700	STEWART ST	DS@163W LANDON AVE	S 1ST AVE	Local	Asphalt	22	168	21	431	40	54	80	Strng	Marginal	27	33	**44**
46720	STEWART ST	S 1ST AVE	DS@162W S 1ST AVE	Local	Asphalt	21	162	19	397	73	52	60	Mod	Good	9	18	**65**
46690	STEWART ST	DS@162W S 1ST AVE	S 2ND AVE	Local	Asphalt	22	168	21	431	86	69	60	Mod	V Good	0	14	**79.8**
46680	STEWART ST	S 2ND AVE	DS@170W S 2ND AVE	Local	Asphalt	22	170	21	436	44	51	80	Strng	Marginal	21	35	**45**
46640	STEWART ST	DS@170W S 2ND AVE	S 3RD AVE	Local	Asphalt	21	161	19	394	79	60	60	Mod	V Good	5	16	**72**
46650	STEWART ST	S 3RD AVE	DS@157W S 3RD AVE	Local	Asphalt	30	157	26	550	80	61	60	Mod	V Good	4	16	**73**
46660	STEWART ST	DS@157W S 3RD AVE	S 4TH AVE	Local	Asphalt	30	166	28	581	80	71	60	Mod	V Good	11	9	**76**
46570	STEWART ST	S 4TH AVE	DS@166W S 4TH AVE	Local	Asphalt	32	166	30	620	72	60	60	Mod	Good	8	21	**67**
46530	STEWART ST	DS@166W S 4TH AVE	S 5TH AVE	Local	Asphalt	25	174	24	508	77	57	80	Strng	Good	4	19	**69**
46550	STEWART ST	S 5TH AVE	DS@157W S 5TH AVE	Local	Asphalt	29	157	25	531	54	36	80	Strng	Marginal	11	34	**47**
46510	STEWART ST	DS@157W S 5TH AVE	S 6TH AVE	Local	Asphalt	29	162	26	548	82	73	60	Mod	V Good	0	18	**79**
46580	STEWART ST	S 6TH AVE	DS@166W S 6TH AVE	Local	Asphalt	29	166	27	562	75	62	80	Strng	V Good	0	25	**70**
46590	STEWART ST	DS@166W S 6TH AVE	CORNELL AVE	Local	Asphalt	28	156	24	510	80	70	60	Mod	V Good	0	21	**76**
46760	STEWART ST	CORNELL AVE	S 8TH AVE	Local	Asphalt	24	471	63	1,319	74	63	80	Strng	V Good	2	24	**70**
46780	STEWART ST	S 8TH AVE	HANRATTY DR	Local	Asphalt	29	195	31	660	65	44	80	Strng	Fair	10	25	**57**
46800	STEWART ST	HANRATTY DR	S 9TH AVE	Local	Asphalt	29	275	44	930	67	50	80	Strng	Good	11	22	**61**
47440	STEWART ST	S 10TH AVE	S 11TH AVE	Local	Asphalt	22	309	38	793	51	40	60	Mod	Marginal	29	20	**45.8**
47450	STEWART ST	S 11TH AVE	PLEASANT AVE	Local	Asphalt	22	321	39	824	71	49	60	Mod	Good	16	13	**63**
47510	STEWART ST	PLEASANT AVE	DS@172W PLEASANT AVE	Local	Asphalt	21	172	20	421	79	59	60	Mod	V Good	8	14	**71**
47520	STEWART ST	DS@172W PLEASANT AVE	QUEEN AVE	Local	Asphalt	22	161	20	413	92	75	60	Mod	Excellent	0	8	**86**
47480	STEWART ST	QUEEN AVE	DS@168W QUEEN AVE	Local	Asphalt	21	168	20	412	82	63	60	Mod	V Good	0	18	**75**
47490	STEWART ST	DS@168W QUEEN AVE	S 12TH AVE	Local	Asphalt	21	182	21	446	54	36	80	Strng	Marginal	6	40	**47**
47580	STEWART ST	S 17TH AVE	S 17TH AVE	Local	Asphalt	21	48	6	118	45	19	80	Strng	Poor	24	31	**35**
47570	STEWART ST	S 17TH AVE	S 18TH AVE	Local	Asphalt	21	202	24	495	43	39	80	Strng	Marginal	18	39	**41**
47550	STEWART ST	S 18TH AVE	S 18TH AVE	Local	Asphalt	16	64	6	119	19	18	80	Strng	V Poor	42	38	**18**
47530	STEWART ST	S 18TH AVE	WEST END	Local	Asphalt	16	140	12	261	24	31	80	Strng	Poor	45	31	**25**
51410	STORM AVE	S 41ST AVE	S 43RD AVE	Local	Asphalt	30	647	108	2265	37	39	60	Mod	Poor	38	25	**36.6**
51440	STORM AVE	S 43RD AVE	WEST END	Local	Asphalt	16	163	14	304	69	44	80	Strng	Good	11	21	**60**
51600	STORM AVE	EAST END	S 69TH AVE	Local	Asphalt	38	270	57	1206	58	57	80	Strng	Fair	8	34	**56.9**
59280	STREIF RD	EAST END	S 72ND AVE	Local	Asphalt	33	551	101	2121	66	53	80	Strng	Good	8	27	**60.4**
76220	SUMMIT CREST WAY	KAIL DR	JUANITA DR	Other	Asphalt	28	240	37	784	100	90	60	Mod	Excellent	0	0	**95.6**
27180	SUMMITVIEW AVE	W YAKIMA AVE	N 7TH AVE	Principal Arterial	Asphalt	43	157	38	788	76	56	60	Mod	Good	6	18	**68.2**
26690	SUMMITVIEW AVE	N 7TH AVE	DS@165W N 7TH AVE	Principal Arterial	Asphalt	46	165	42	886	78	63	60	Mod	V Good	10	12	**71.9**
26350	SUMMITVIEW AVE	DS@165W N 7TH AVE	PIERCE AVE	Principal Arterial	Asphalt	46	80	20	429	87	91	60	Mod	Excellent	0	13	**87**
26310	SUMMITVIEW AVE	PIERCE AVE	N 8TH AVE	Principal Arterial	Asphalt	46	127	32	682	79	83	60	Mod	V Good	6	15	**79**
26250	SUMMITVIEW AVE	N 8TH AVE	DS@193W N 8TH AVE	Principal Arterial	Asphalt	46	193	49	1,036	86	97	60	Mod	Excellent	5	9	**88**
26240	SUMMITVIEW AVE	DS@193W N 8TH AVE	N 9TH AVE	Principal Arterial	Asphalt	46	199	51	1068	86	89	60	Mod	Excellent	0	15	**85.8**
26280	SUMMITVIEW AVE	N 9TH AVE	CUSTER AVE	Principal Arterial	Asphalt	44	403	99	2,069	83	86	60	Mod	V Good	0	17	**83**
26520	SUMMITVIEW AVE	CUSTER AVE	N 11TH AVE	Principal Arterial	Asphalt	46	387	99	2077	85	81	60	Mod	V Good	5	11	**82.5**
26610	SUMMITVIEW AVE	N 11TH AVE	HALL AVE	Principal Arterial	Asphalt	46	263	67	1,411	81	81	60	Mod	V Good	5	14	**80**
26600	SUMMITVIEW AVE	HALL AVE	DS@161W HALL AVE	Principal Arterial	Asphalt	47	161	42	883	86	92	60	Mod	Excellent	4	10	**86.8**
26580	SUMMITVIEW AVE	DS@161W HALL AVE	DS@330W HALL AVE	Principal Arterial	Asphalt	46	170	43	912	92	89	60	Mod	Excellent	0	8	**90.1**
26570	SUMMITVIEW AVE	DS@330W HALL AVE	N 15TH AVE	Principal Arterial	Asphalt	46	289	74	1551	89	86	60	Mod	Excellent	4	7	**86.8**
26560	SUMMITVIEW AVE	N 15TH AVE	N 16TH AVE	Principal Arterial	Asphalt	45	437	109	2,294	84	69	60	Mod	V Good	6	11	**78**



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
26550	SUMMITVIEW AVE	N 16TH AVE	DS@284W N 16TH AVE	Truck Route	Asphalt	46	284	73	1,524	62	46	60	Mod	Fair	23	16	**55**
26500	SUMMITVIEW AVE	DS@284W N 16TH AVE	DS@497W N 16TH AVE	Truck Route	Asphalt	48	213	57	1193	45	77	60	Mod	Fair	28	27	**54.6**
26490	SUMMITVIEW AVE	DS@497W N 16TH AVE	DS@630W N 16TH AVE	Truck Route	Asphalt	48	134	36	750	50	86	60	Mod	Good	24	27	**60.7**
26480	SUMMITVIEW AVE	DS@630W N 16TH AVE	N 18TH AVE	Truck Route	Asphalt	48	169	45	946	42	84	60	Mod	Fair	29	29	**54.9**
26470	SUMMITVIEW AVE	N 18TH AVE	PARK AVE	Truck Route	Asphalt	48	349	93	1954	51	83	60	Mod	Good	27	22	**60.4**
26430	SUMMITVIEW AVE	PARK AVE	DS@186W PARK AVE	Truck Route	Asphalt	49	186	51	1063	49	69	60	Mod	Fair	27	24	**54.6**
26410	SUMMITVIEW AVE	DS@186W PARK AVE	N 21ST AVE	Truck Route	Asphalt	49	185	50	1058	61	89	60	Mod	V Good	19	20	**69.4**
26400	SUMMITVIEW AVE	N 21ST AVE	GILBERT DR	Truck Route	Asphalt	47	181	47	992	62	73	60	Mod	Good	15	23	**65**
26380	SUMMITVIEW AVE	GILBERT DR	N 22ND AVE	Truck Route	Asphalt	48	225	60	1260	55	82	60	Mod	Good	23	21	**63**
26370	SUMMITVIEW AVE	N 22ND AVE	N 23RD AVE	Truck Route	Asphalt	48	357	95	1999	54	74	60	Mod	Good	25	21	**59.6**
26340	SUMMITVIEW AVE	N 23RD AVE	N 24TH AVE	Truck Route	Asphalt	48	329	88	1842	60	83	60	Mod	Good	20	21	**66.4**
26270	SUMMITVIEW AVE	N 24TH AVE	DS@165W N 24TH AVE	Truck Route	Asphalt	47	165	43	905	59	81	60	Mod	Good	19	22	**65**
26230	SUMMITVIEW AVE	DS@165W N 24TH AVE	N 25TH AVE	Truck Route	Asphalt	48	167	45	935	61	85	60	Mod	Good	19	20	**67.8**
26200	SUMMITVIEW AVE	N 25TH AVE	DS@162W N 25TH AVE	Truck Route	Asphalt	48	162	43	907	55	83	60	Mod	Good	20	25	**63.2**
26180	SUMMITVIEW AVE	DS@162W N 25TH AVE	N 26TH AVE	Truck Route	Asphalt	47	168	44	921	63	81	60	Mod	Good	18	19	**67.8**
26170	SUMMITVIEW AVE	N 26TH AVE	N 27TH AVE	Truck Route	Asphalt	48	330	88	1848	61	83	60	Mod	Good	18	21	**67.3**
26090	SUMMITVIEW AVE	N 27TH AVE	N 28TH AVE	Truck Route	Asphalt	49	324	88	1,852	58	79	60	Mod	Good	21	21	**64**
26060	SUMMITVIEW AVE	N 28TH AVE	N 29TH AVE	Truck Route	Asphalt	47	337	88	1848	63	83	60	Mod	Good	17	20	**68.9**
25980	SUMMITVIEW AVE	N 29TH AVE	CLEMAN AVE	Truck Route	Asphalt	49	259	71	1481	63	78	60	Mod	Good	18	19	**66.6**
25950	SUMMITVIEW AVE	CLEMAN AVE	N 30TH AVE	Truck Route	Asphalt	48	63	17	353	52	70	80	Strng	Fair	12	36	**57.1**
25930	SUMMITVIEW AVE	N 30TH AVE	N 30TH AVE	Truck Route	Asphalt	48	50	13	280	64	66	60	Mod	Good	11	24	**64**
25920	SUMMITVIEW AVE	N 30TH AVE	N 31ST AVE	Truck Route	Asphalt	48	298	79	1669	57	77	60	Mod	Good	20	23	**62.7**
25880	SUMMITVIEW AVE	N 31ST AVE	N 32ND AVE	Truck Route	Asphalt	47	313	82	1716	33	67	60	Mod	Marginal	42	25	**43.2**
25720	SUMMITVIEW AVE	N 32ND AVE	N 33RD AVE	Truck Route	Asphalt	48	461	123	2,582	41	70	60	Mod	Fair	30	28	**50**
25700	SUMMITVIEW AVE	N 33RD AVE	CORRIGAN WY	Truck Route	Asphalt	47	64	17	351	53	39	80	Strng	Marginal	22	25	**47**
25740	SUMMITVIEW AVE	CORRIGAN WY	N 34TH AVE	Truck Route	Asphalt	49	250	68	1,429	61	79	60	Mod	Good	18	21	**66**
25760	SUMMITVIEW AVE	N 34TH AVE	N 35TH AVE	Truck Route	Asphalt	47	261	68	1,431	57	74	60	Mod	Good	19	24	**62**
25790	SUMMITVIEW AVE	N 35TH AVE	N 36TH AVE	Truck Route	Asphalt	48	288	77	1,613	60	82	60	Mod	Good	14	26	**66**
25830	SUMMITVIEW AVE	N 36TH AVE	N 37TH AVE	Truck Route	Asphalt	48	288	77	1,613	58	78	60	Mod	Good	17	26	**63**
25850	SUMMITVIEW AVE	N 37TH AVE	N 37TH AVE	Truck Route	Asphalt	48	149	40	834	60	77	60	Mod	Good	18	22	**65**
25820	SUMMITVIEW AVE	N 37TH AVE	DS@177W N 37TH AVE	Truck Route	Asphalt	47	177	46	971	43	61	60	Mod	Marginal	35	22	**48**
25860	SUMMITVIEW AVE	DS@177W N 37TH AVE	N 39TH AVE	Truck Route	Asphalt	46	373	95	2,002	40	58	80	Strng	Marginal	26	34	**45**
25900	SUMMITVIEW AVE	N 39TH AVE	N 40TH AVE	Truck Route	Asphalt	53	340	100	2,102	78	70	60	Mod	V Good	8	14	**75**
25990	SUMMITVIEW AVE	N 40TH AVE	WESTPARK ST	Truck Route	Asphalt	53	240	71	1,484	85	70	60	Mod	V Good	9	6	**79**
26000	SUMMITVIEW AVE	WESTPARK ST	DS@397W WESTPARK ST	Truck Route	Asphalt	47	397	104	2,177	63	63	60	Mod	Good	22	15	**62**
26010	SUMMITVIEW AVE	DS@397W WESTPARK ST	N 42ND AVE	Truck Route	Asphalt	49	131	36	749	63	50	80	Strng	Fair	15	22	**58**
26030	SUMMITVIEW AVE	N 42ND AVE	N 44TH AVE	Truck Route	Asphalt	47	517	135	2,835	70	68	60	Mod	Good	13	17	**68**
26140	SUMMITVIEW AVE	N 44TH AVE	N 45TH AVE	Truck Route	Asphalt	47	358	93	1,963	77	68	60	Mod	V Good	9	14	**73**
26150	SUMMITVIEW AVE	N 45TH AVE	N 46TH AVE	Truck Route	Asphalt	48	324	86	1,814	73	74	60	Mod	V Good	14	13	**73**
26100	SUMMITVIEW AVE	N 46TH AVE	RANCHO LN	Truck Route	Asphalt	46	433	111	2,324	76	71	60	Mod	V Good	9	15	**73**
26120	SUMMITVIEW AVE	RANCHO LN	N 48TH AVE	Truck Route	Asphalt	55	231	71	1,482	68	55	60	Mod	Good	15	17	**63**
26020	SUMMITVIEW AVE	N 48TH AVE	N 49TH AVE	Truck Route	Asphalt	55	321	98	2060	78	82	60	Mod	V Good	7	15	**78.6**
25960	SUMMITVIEW AVE	N 49TH AVE	DS@215W N 49TH AVE	Truck Route	Asphalt	49	215	59	1,229	68	86	60	Mod	V Good	14	19	**73**
25890	SUMMITVIEW AVE	DS@215W N 49TH AVE	N 50TH AVE	Truck Route	Asphalt	48	327	87	1,831	76	84	60	Mod	V Good	5	20	**78**
25780	SUMMITVIEW AVE	N 50TH AVE	N 52ND AVE	Truck Route	Asphalt	46	633	162	3397	76	96	60	Mod	V Good	3	21	**81.9**
25670	SUMMITVIEW AVE	N 52ND AVE	DS@290W N 52ND AVE	Truck Route	Asphalt	46	290	74	1,556	76	96	60	Mod	V Good	5	19	**82**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
25680	SUMMITVIEW AVE	DS@290W N 52ND AVE	DS@611W N 52ND AVE	Truck Route	Asphalt	47	321	84	1,760	84	93	60	Mod	Excellent	0	16	**87**
25660	SUMMITVIEW AVE	DS@611W N 52ND AVE	N 55TH AVE	Truck Route	Asphalt	47	284	74	1,557	84	84	60	Mod	V Good	4	12	**84**
25630	SUMMITVIEW AVE	N 55TH AVE	N 56TH AVE	Truck Route	Asphalt	47	304	79	1,667	77	71	60	Mod	V Good	7	15	**74**
25610	SUMMITVIEW AVE	N 56TH AVE	DS@529W N 56TH AVE	Truck Route	Asphalt	52	529	153	3,209	70	61	60	Mod	Good	17	13	**66**
25520	SUMMITVIEW AVE	DS@529W N 56TH AVE	DS@644W N 56TH AVE	Truck Route	Asphalt	53	115	34	711	62	50	60	Mod	Fair	21	17	**57**
25510	SUMMITVIEW AVE	DS@644W N 56TH AVE	DS@985W N 56TH AVE	Truck Route	Asphalt	53	342	101	2,115	57	61	60	Mod	Fair	32	11	**57**
25470	SUMMITVIEW AVE	DS@985W N 56TH AVE	N 60TH AVE	Truck Route	Asphalt	52	347	100	2,105	60	58	60	Mod	Fair	29	11	**58**
25460	SUMMITVIEW AVE	N 60TH AVE	N SHAMROCK DR, E	Truck Route	Asphalt	52	386	112	2,342	68	52	60	Mod	Good	20	12	**62**
25450	SUMMITVIEW AVE	N SHAMROCK DR, E	N SHAMROCK DR, W	Truck Route	Asphalt	52	252	73	1529	60	60	60	Mod	Good	26	14	**58.8**
25440	SUMMITVIEW AVE	N SHAMROCK DR, W	N 62ND AVE	Truck Route	Asphalt	52	206	60	1,250	59	62	60	Mod	Fair	30	12	**59**
25430	SUMMITVIEW AVE	N 62ND AVE	N 63RD AVE	Truck Route	Asphalt	52	331	96	2,008	59	64	60	Mod	Good	28	13	**60**
25410	SUMMITVIEW AVE	N 63RD AVE	N 65TH AVE	Truck Route	Asphalt	48	459	122	2,570	67	58	60	Mod	Good	21	12	**63**
25390	SUMMITVIEW AVE	N 65TH AVE	N 66TH AVE	Truck Route	Asphalt	50	387	108	2,258	70	78	60	Mod	V Good	20	10	**72**
25360	SUMMITVIEW AVE	N 66TH AVE	DS@78W N 66TH AVE	Truck Route	Asphalt	53	78	23	482	71	62	60	Mod	Good	15	14	**67**
25340	SUMMITVIEW AVE	DS@78W N 66TH AVE	N 67TH AVE	Truck Route	Asphalt	54	353	106	2,224	66	74	60	Mod	Good	18	17	**67**
25310	SUMMITVIEW AVE	N 67TH AVE	N 69TH AVE	Truck Route	Asphalt	47	580	151	3180	45	58	60	Mod	Marginal	29	26	**47.9**
25320	SUMMITVIEW AVE	N 69TH AVE	N 70TH AVE	Truck Route	Asphalt	48	86	23	482	65	64	60	Mod	Good	13	22	**63.5**
26700	SUMMITVIEW AVE	N 70TH AVE	DS@627W N 70TH AVE	Truck Route	Asphalt	51	627	178	3731	51	71	60	Mod	Fair	26	23	**56.6**
26510	SUMMITVIEW AVE	DS@627W N 70TH AVE	N 72ND AVE	Truck Route	Asphalt	52	329	95	1996	49	63	60	Mod	Fair	31	20	**52.6**
25380	SUMMITVIEW AVE	N 72ND AVE	DS@339W N 72ND AVE	Truck Route	Asphalt	55	339	104	2,175	45	52	60	Mod	Marginal	33	22	**46**
25200	SUMMITVIEW AVE	DS@339W N 72ND AVE	N 74TH AVE	Truck Route	Asphalt	47	338	88	1,853	43	60	60	Mod	Marginal	31	26	**47**
25220	SUMMITVIEW AVE	N 74TH AVE	DS@331W N 74TH AVE	Truck Route	Asphalt	50	331	92	1931	34	66	60	Mod	Marginal	36	30	**43.8**
25190	SUMMITVIEW AVE	DS@331W N 74TH AVE	N 76TH AVE	Truck Route	Asphalt	51	316	90	1,880	46	68	60	Mod	Fair	30	24	**52**
25160	SUMMITVIEW AVE	N 76TH AVE	N 77TH AVE	Truck Route	Asphalt	48	366	98	2,050	43	70	60	Mod	Fair	30	27	**51**
25120	SUMMITVIEW AVE	N 77TH AVE	N 77TH AVE	Truck Route	Asphalt	47	132	34	724	37	63	60	Mod	Marginal	39	24	**44**
25100	SUMMITVIEW AVE	N 77TH AVE	N 78TH AVE	Truck Route	Asphalt	48	324	86	1,814	40	72	60	Mod	Fair	35	25	**49**
25090	SUMMITVIEW AVE	N 78TH AVE	N 79TH AVE	Truck Route	Asphalt	48	154	41	862	27	63	60	Mod	Poor	40	32	**38**
25070	SUMMITVIEW AVE	N 79TH AVE	N 80TH AVE	Truck Route	Asphalt	48	340	91	1,904	37	72	60	Mod	Marginal	37	27	**47**
25050	SUMMITVIEW AVE	N 80TH AVE	N 81ST AVE	Truck Route	Asphalt	48	333	89	1,865	39	67	60	Mod	Marginal	33	29	**47**
25030	SUMMITVIEW AVE	N 81ST AVE	N 82ND AVE	Truck Route	Asphalt	48	176	47	986	31	53	80	Strng	Poor	21	30	**37.5**
24920	SUMMITVIEW AVE	N 82ND AVE	N 83RD AVE	Truck Route	Asphalt	47	317	83	1738	44	63	60	Mod	Fair	29	26	**49.1**
24960	SUMMITVIEW AVE	N 83RD AVE	N 84TH AVE	Truck Route	Asphalt	48	492	131	2,755	44	65	60	Mod	Fair	29	27	**49**
24980	SUMMITVIEW AVE	N 84TH AVE	N 85TH AVE	Truck Route	Asphalt	46	349	89	1,873	53	73	60	Mod	Fair	23	24	**59**
25000	SUMMITVIEW AVE	N 85TH AVE	N 87TH AVE	Truck Route	Asphalt	49	355	97	2029	49	69	60	Mod	Fair	25	26	**54.3**
25010	SUMMITVIEW AVE	N 87TH AVE	DS@315W N 87TH AVE	Truck Route	Asphalt	50	315	88	1838	43	67	60	Mod	Fair	29	28	**49.7**
24990	SUMMITVIEW AVE	DS@315W N 87TH AVE	N 88TH AVE	Truck Route	Asphalt	61	291	99	2071	45	67	60	Mod	Fair	24	31	**50.9**
24900	SUMMITVIEW AVE	N 88TH AVE	N 89TH AVE	Truck Route	Asphalt	48	528	141	2957	43	62	60	Mod	Marginal	31	26	**47.9**
24880	SUMMITVIEW AVE	N 89TH AVE	N 90TH AVE	Truck Route	Asphalt	47	332	87	1820	52	77	60	Mod	Good	25	23	**59.1**
24840	SUMMITVIEW AVE	N 90TH AVE	DS@250W N 90TH AVE	Truck Route	Asphalt	48	250	67	1400	46	61	60	Mod	Fair	31	24	**49.4**
24820	SUMMITVIEW AVE	DS@250W N 90TH AVE	N 92ND AVE	Truck Route	Asphalt	48	210	56	1176	53	82	60	Mod	Good	25	22	**61.4**
24780	SUMMITVIEW AVE	N 92ND AVE	N 92ND AVE	Truck Route	Asphalt	47	200	52	1097	56	72	60	Mod	Good	19	25	**60.7**
24790	SUMMITVIEW AVE	N 92ND AVE	N 93RD AVE	Truck Route	Asphalt	47	354	92	1941	52	74	60	Mod	Fair	25	23	**58.2**
24850	SUMMITVIEW AVE	N 93RD AVE	N 94TH AVE	Truck Route	Asphalt	48	278	74	1557	48	81	60	Mod	Fair	27	25	**58**
24940	SUMMITVIEW AVE	N 94TH AVE	DS@288W N 94TH AVE	Truck Route	Asphalt	52	288	83	1747	54	73	60	Mod	Good	19	27	**59.1**
24950	SUMMITVIEW AVE	DS@288W N 94TH AVE	N 96TH AVE	Truck Route	Asphalt	58	216	70	1462	75	69	60	Mod	V Good	8	17	**71.9**
71250	SUN VALLEY WY	NORTH END	TIETON DR	Local	Asphalt	31	632	108	2271	27	45	60	Mod	Poor	46	27	**31.9**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name

GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
57100	SUNCREST WY	W KING ST	S 32ND AVE	Local	Asphalt	29	647	104	2189	70	61	80	Strng	Good	5	24	**66.2**
21550	SUNRISE PARK DR	EAST END	DS@95W EAST END	Local	Asphalt	22	95	12	244	41	34	80	Strng	Poor	33	26	**38**
21510	SUNRISE PARK DR	DS@95W EAST END	W LINCOLN AVE	Local	Asphalt	23	505	65	1,355	49	43	80	Strng	Marginal	25	26	**46**
69970	SUNSET AVE	W LINCOLN AVE	ENGLEWOOD CREST DR	Local	Asphalt	29	317	51	1073	61	66	80	Strng	Good	9	29	**61.7**
8040	SURREY LN	CONESTOGA BLVD	COACH CT	Local	Asphalt	28	302	47	987	100	90	60	Mod	Excellent	0	0	**96**
8050	SURREY LN	COACH CT	CARRIAGE HILL DR	Local	Asphalt	30	309	52	1,082	100	90	60	Mod	Excellent	0	0	**96**
53600	SUSAN AVE	S 34TH AVE	DS@532W S 34TH AVE	Local	Asphalt	31	532	92	1924	67	65	80	Strng	Good	5	27	**65.7**
53580	SUSAN AVE	DS@532W S 34TH AVE	S 36TH AVE	Local	Asphalt	33	124	23	477	59	69	80	Strng	Good	0	41	**62**
11120	SWAN AVE	N 6TH AVE	CAMPBELL LN	Local	Asphalt	30	704	117	2,464	68	45	60	Mod	Good	15	17	**59**
11070	SWAN AVE	CAMPBELL LN	DS@371W CAMPBELL LN	Local	Asphalt	29	371	60	1255	66	46	60	Mod	Fair	17	17	**58**
11080	SWAN AVE	DS@371W CAMPBELL LN	DS@724W CAMPBELL LN	Local	Asphalt	30	353	59	1236	68	43	80	Strng	Fair	11	21	**58.8**
11170	SWAN AVE	DS@724W CAMPBELL LN	DS@1144W CAMPBELL LN	Local	Asphalt	29	420	68	1421	65	38	80	Strng	Fair	16	19	**54.9**
11200	SWAN AVE	DS@1144W CAMPBELL LN	N 14TH AVE	Local	Asphalt	22	131	16	336	83	64	60	Mod	V Good	0	17	**75.5**
11220	SWAN AVE	N 14TH AVE	N 15TH AVE	Local	Asphalt	23	333	43	894	79	60	60	Mod	V Good	5	17	**71.5**
11180	SWAN AVE	N 15TH AVE	N 16TH AVE	Local	Asphalt	17	345	33	684	65	38	60	Mod	Fair	20	15	**55**
10700	SWAN AVE	N 18TH AVE	N 19TH AVE	Local	Asphalt	22	333	41	855	79	60	80	Strng	V Good	0	21	**72.5**
10660	SWAN AVE	N 19TH AVE	N 20TH AVE	Local	Asphalt	20	333	37	777	74	53	80	Strng	Good	0	26	**66.6**
10680	SWAN AVE	N 20TH AVE	DS@742W N 20TH AVE	Local	Asphalt	23	742	95	1991	83	64	60	Mod	V Good	6	12	**75.7**
10650	SWAN AVE	DS@742W N 20TH AVE	WEST END	Local	Asphalt	20	374	42	873	46	18	80	Strng	Poor	14	28	**35.4**
10590	SWAN AVE	EAST END	DS@73W EAST END	Local	Asphalt	23	73	9	196	81	73	60	Mod	V Good	0	19	**78**
10600	SWAN AVE	DS@73W EAST END	N 27TH AVE	Local	Asphalt	31	283	49	1024	82	63	60	Mod	V Good	0	18	**75**
10610	SWAN AVE	N 27TH AVE	N 28TH AVE	Local	Asphalt	24	373	50	1044	79	66	80	Strng	V Good	0	21	**74.1**
10630	SWAN AVE	N 28TH AVE	WEST END	Local	Asphalt	46	124	31	660	77	57	60	Mod	V Good	10	13	**69.6**
3240	SYCAMORE ST	N 1ST ST	N 2ND ST	Local	Asphalt	22	330	40	847	70	47	80	Strng	Good	1	29	**61.7**
3110	SYCAMORE ST	N FRONT ST	N 1ST ST	Local	Asphalt	29	349	56	1181	25	50	80	Strng	Poor	33	42	**32.2**
3150	SYCAMORE ST	N FRONT ST	GORDON RD	Local	Asphalt	29	321	52	1086	60	52	80	Strng	Fair	12	28	**56.9**
42250	TAH-KIN RD	S 22ND AVE	DS@167W S 22ND AVE	Local	Asphalt	17	167	16	331	28	36	60	Mod	Poor	49	23	**29.4**
42230	TAH-KIN RD	DS@167W S 22ND AVE	S 23RD AVE	Local	Asphalt	17	172	16	341	75	55	60	Mod	Good	11	13	**67.6**
58220	TAHOMA AVE	S 16TH AVE	DS@385W S 16TH AVE	Local	Asphalt	21	385	45	943	77	57	80	Strng	V Good	4	19	**69.6**
58200	TAHOMA AVE	DS@385W S 16TH AVE	S 18TH AVE	Local	Asphalt	23	318	41	853	76	58	80	Strng	Good	5	20	**69.1**
58190	TAHOMA AVE	S 18TH AVE	WEST END	Local	Asphalt	15	626	52	1,096	93	81	60	Mod	Excellent	0	7	**88**
58110	TAHOMA AVE	S 27TH AVE	S 28TH AVE	Local	Asphalt	27	548	82	1,726	83	68	60	Mod	V Good	0	18	**77**
2920	TAMARACK AVE	N FRONT ST	N 1ST ST	Local	Asphalt	28	349	54	1,140	90	70	60	Mod	V Good	4	6	**83**
2930	TAMARACK AVE	N FRONT ST	GORDON RD	Local	Asphalt	29	322	52	1,089	49	59	80	Strng	Fair	19	32	**52**
41650	TANARAE PL	NORTH END	DS@54S NORTH END	Local	Asphalt	67	54	20	419	50	39	80	Strng	Marginal	14	36	**46**
42570	TANARAE PL	DS@54S NORTH END	BRISTOL WY	Local	Asphalt	36	300	60	1,259	55	40	80	Strng	Marginal	13	33	**49**
28490	TAYLOR WY	N 34TH AVE	N 36TH AVE	Local	Asphalt	21	658	77	1,612	60	51	60	Mod	Fair	23	17	**56**
54130	TENNANT LN	S 1ST ST	DS@486E S 1ST ST	Local	Asphalt	20	486	54	1,134	57	43	80	Strng	Fair	15	28	**52**
54150	TENNANT LN	DS@486E S 1ST ST	DS@913E S 1ST ST	Local	Asphalt	20	427	47	996	60	41	80	Strng	Fair	13	27	**53**
54170	TENNANT LN	DS@913E S 1ST ST	S FAIR AVE	Local	Asphalt	20	388	43	905	66	42	80	Strng	Fair	13	21	**57**
17960	TERRACE HGTS WY	PITCHER ST	S 10TH ST	Local	Asphalt	16	657	58	1,226	54	61	80	Strng	Fair	18	28	**55**
70130	TERRACE ST	S 14TH AVE	S 12TH AVE	Local	Asphalt	18	427	43	897	36	44	80	Strng	Poor	30	34	**38**
58960	TERRY AVE	S 64TH AVE	FREMONT DR	Local	Asphalt	30	173	29	606	59	50	80	Strng	Fair	14	27	**55**
59120	TERRY AVE	FREMONT DR	S 66TH AVE	Local	Asphalt	32	787	140	2,938	62	66	80	Strng	Good	11	27	**63**
59180	TERRY AVE	S 66TH AVE	S 68TH AVE	Local	Asphalt	33	595	109	2,291	59	63	60	Mod	Good	17	24	**59**
59360	TERRY AVE	S 68TH AVE	S 69TH AVE	Local	Asphalt	34	309	58	1,226	68	73	80	Strng	Good	0	32	**69**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
59580	TERRY AVE	S 69TH AVE	S 70TH AVE	Local	Asphalt	33	230	42	886	60	63	60	Mod	Good	15	25	**59.3**
4330	THORNTON LN	BUWALDA LN	N 4TH ST	Local	Asphalt	27	705	106	2,221	59	50	60	Mod	Fair	19	22	**55**
36830	TIETON DR	S 4TH AVE	S 5TH AVE	Local	Asphalt	28	400	62	1,307	30	36	80	Strng	Poor	36	35	**31**
37210	TIETON DR	S 5TH AVE	DS@198W S 5TH AVE	Minor Arterial	Asphalt	51	198	56	1,178	66	40	60	Mod	Fair	20	14	**56**
37340	TIETON DR	DS@198W S 5TH AVE	S 6TH AVE	Minor Arterial	Asphalt	41	211	48	1009	69	66	60	Mod	Good	23	8	**66.9**
37380	TIETON DR	S 6TH AVE	DS@190W S 6TH AVE	Minor Arterial	Asphalt	41	190	43	909	59	78	60	Mod	Good	29	12	**64**
37720	TIETON DR	DS@190W S 6TH AVE	S 7TH AVE	Minor Arterial	Asphalt	42	190	44	931	53	69	60	Mod	Fair	33	14	**57**
37980	TIETON DR	S 7TH AVE	DS@187W S 7TH AVE	Minor Arterial	Asphalt	42	187	44	916	67	80	60	Mod	V Good	21	13	**70**
38280	TIETON DR	DS@187W S 7TH AVE	S 8TH AVE	Minor Arterial	Asphalt	41	192	44	918	63	82	60	Mod	Good	22	15	**67.8**
38830	TIETON DR	S 8TH AVE	DS@191W S 8TH AVE	Minor Arterial	Asphalt	52	191	55	1159	58	79	60	Mod	Good	26	15	**64**
39380	TIETON DR	DS@191W S 8TH AVE	S 9TH AVE	Minor Arterial	Asphalt	52	192	55	1,165	61	79	60	Mod	Good	23	16	**65**
39400	TIETON DR	S 9TH AVE	DS@194W S 9TH AVE	Minor Arterial	Asphalt	39	194	42	883	50	67	60	Mod	Fair	31	19	**54**
39340	TIETON DR	DS@194W S 9TH AVE	S 10TH AVE	Minor Arterial	Asphalt	39	208	45	946	55	60	60	Mod	Fair	30	14	**56**
39060	TIETON DR	S 10TH AVE	DS@152W S 10TH AVE	Minor Arterial	Asphalt	36	152	30	638	48	70	60	Mod	Fair	25	17	**54**
39040	TIETON DR	DS@152W S 10TH AVE	DS@204W S 10TH AVE	Minor Arterial	Asphalt	40	52	12	243	57	82	60	Mod	Good	28	16	**64**
39020	TIETON DR	DS@204W S 10TH AVE	S 11TH AVE	Minor Arterial	Asphalt	37	100	21	432	65	70	60	Mod	Good	20	15	**66**
39000	TIETON DR	S 11TH AVE	S 11TH AVE	Minor Arterial	Asphalt	38	128	27	567	51	63	60	Mod	Fair	32	17	**54**
39030	TIETON DR	S 11TH AVE	PLEASANT AVE	Minor Arterial	Asphalt	36	197	39	827	48	60	60	Mod	Fair	34	18	**50**
39080	TIETON DR	PLEASANT AVE	HOLTON AVE	Minor Arterial	Asphalt	38	179	38	794	55	68	60	Mod	Fair	29	16	**58**
39100	TIETON DR	HOLTON AVE	QUEEN AVE	Minor Arterial	Asphalt	37	152	31	656	44	67	60	Mod	Fair	37	19	**50**
39110	TIETON DR	QUEEN AVE	DS@96W QUEEN AVE	Minor Arterial	Asphalt	37	96	20	414	37	63	60	Mod	Marginal	39	24	**44**
39140	TIETON DR	DS@96W QUEEN AVE	DS@166W QUEEN AVE	Minor Arterial	Asphalt	36	70	14	294	43	63	60	Mod	Marginal	38	20	**48**
39160	TIETON DR	DS@166W QUEEN AVE	S 12TH AVE	Minor Arterial	Asphalt	37	161	33	695	52	71	60	Mod	Fair	31	18	**57**
39180	TIETON DR	S 12TH AVE	DS@154W S 12TH AVE	Minor Arterial	Asphalt	42	154	36	755	58	74	60	Mod	Good	28	13	**62**
39190	TIETON DR	DS@154W S 12TH AVE	S 13TH AVE	Minor Arterial	Asphalt	41	150	34	718	59	69	60	Mod	Good	26	15	**61**
39240	TIETON DR	S 13TH AVE	DS@171W S 13TH AVE	Minor Arterial	Asphalt	41	171	39	818	55	55	60	Mod	Fair	31	15	**53.2**
39250	TIETON DR	DS@171W S 13TH AVE	S 14TH AVE	Minor Arterial	Asphalt	41	175	40	837	64	61	60	Mod	Good	22	15	**61.2**
39210	TIETON DR	S 14TH AVE	DS@164W S 14TH AVE	Minor Arterial	Asphalt	42	164	38	804	52	62	60	Mod	Fair	32	17	**54**
39220	TIETON DR	DS@164W S 14TH AVE	S 15TH AVE	Minor Arterial	Asphalt	43	165	39	828	55	61	60	Mod	Fair	30	15	**56**
39260	TIETON DR	S 15TH AVE	DS@166W S 15TH AVE	Minor Arterial	Asphalt	41	166	38	794	53	52	60	Mod	Fair	29	17	**52**
39270	TIETON DR	DS@166W S 15TH AVE	S 16TH AVE	Minor Arterial	Asphalt	42	165	39	809	54	45	80	Strng	Fair	23	23	**49**
39130	TIETON DR	S 16TH AVE	DS@168W S 16TH AVE	Minor Arterial	Asphalt	42	168	39	823	63	49	80	Strng	Fair	14	23	**57**
39070	TIETON DR	DS@168W S 16TH AVE	S 17TH AVE	Minor Arterial	Asphalt	43	165	39	828	80	74	60	Mod	V Good	6	14	**77**
38990	TIETON DR	S 17TH AVE	DS@165W S 17TH AVE	Minor Arterial	Asphalt	41	165	38	789	80	64	60	Mod	V Good	4	16	**73.7**
38950	TIETON DR	DS@165W S 17TH AVE	S 18TH AVE	Minor Arterial	Asphalt	42	163	38	799	80	75	60	Mod	V Good	5	15	**77.6**
38920	TIETON DR	S 18TH AVE	DS@168W S 18TH AVE	Minor Arterial	Asphalt	41	168	38	804	80	69	60	Mod	V Good	8	12	**75**
38900	TIETON DR	DS@168W S 18TH AVE	S 19TH AVE	Minor Arterial	Asphalt	41	165	38	789	78	70	60	Mod	V Good	7	15	**74**
38890	TIETON DR	S 19TH AVE	DS@161W S 19TH AVE	Minor Arterial	Asphalt	42	161	38	789	74	73	60	Mod	V Good	8	18	**72.3**
38860	TIETON DR	DS@161W S 19TH AVE	S 20TH AVE	Minor Arterial	Asphalt	41	170	39	813	67	77	60	Mod	V Good	13	20	**69.4**
38820	TIETON DR	S 20TH AVE	DS@136W S 20TH AVE	Minor Arterial	Asphalt	41	136	31	651	78	81	60	Mod	V Good	5	17	**78.1**
38810	TIETON DR	DS@136W S 20TH AVE	S 21ST AVE	Minor Arterial	Asphalt	39	185	40	842	71	80	60	Mod	V Good	12	17	**73.1**
38800	TIETON DR	S 21ST AVE	S 22ND AVE	Minor Arterial	Asphalt	42	332	77	1627	80	75	60	Mod	V Good	10	10	**77.3**
38790	TIETON DR	S 22ND AVE	S 23RD AVE	Minor Arterial	Asphalt	41	403	92	1928	83	76	60	Mod	V Good	10	7	**79.9**
38780	TIETON DR	S 23RD AVE	S 23RD AVE	Minor Arterial	Asphalt	40	98	22	457	74	75	60	Mod	V Good	10	16	**73**
38770	TIETON DR	S 23RD AVE	S 24TH AVE	Minor Arterial	Asphalt	40	176	39	821	81	62	60	Mod	V Good	8	11	**74**
38750	TIETON DR	S 24TH AVE	DS@145W S 24TH AVE	Minor Arterial	Asphalt	41	145	33	694	85	67	60	Mod	V Good	6	9	**78**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
38730	TIETON DR	DS@145W S 24TH AVE	S 25TH AVE	Minor Arterial	Asphalt	41	165	38	789	82	77	60	Mod	V Good	11	7	**79.3**
38720	TIETON DR	S 25TH AVE	DS@165W S 25TH AVE	Minor Arterial	Asphalt	40	165	37	770	88	78	60	Mod	V Good	6	6	**83.8**
38700	TIETON DR	DS@165W S 25TH AVE	S 26TH AVE	Minor Arterial	Asphalt	42	167	39	818	84	69	60	Mod	V Good	4	12	**77.6**
38690	TIETON DR	S 26TH AVE	DS@152W S 26TH AVE	Minor Arterial	Asphalt	42	152	35	745	84	71	60	Mod	V Good	0	16	**78.5**
38620	TIETON DR	DS@152W S 26TH AVE	S 27TH AVE	Minor Arterial	Asphalt	42	159	37	779	84	77	60	Mod	V Good	4	12	**81**
38550	TIETON DR	S 27TH AVE	S 28TH AVE	Minor Arterial	Asphalt	41	335	76	1,602	77	78	60	Mod	V Good	7	16	**76**
38470	TIETON DR	S 28TH AVE	DS@349W S 28TH AVE	Minor Arterial	Asphalt	43	349	83	1,751	75	75	60	Mod	V Good	6	20	**74**
38390	TIETON DR	DS@349W S 28TH AVE	S 30TH AVE	Minor Arterial	Asphalt	42	326	76	1,597	77	72	60	Mod	V Good	5	17	**74**
38330	TIETON DR	S 30TH AVE	S 31ST AVE	Minor Arterial	Asphalt	42	328	77	1,607	78	73	60	Mod	V Good	6	16	**75**
38240	TIETON DR	S 31ST AVE	S 32ND AVE	Minor Arterial	Asphalt	41	332	76	1,588	80	73	60	Mod	V Good	10	11	**77**
38200	TIETON DR	S 32ND AVE	VOLTAIRE AVE	Minor Arterial	Asphalt	41	325	74	1,555	76	68	60	Mod	V Good	14	10	**72**
38210	TIETON DR	VOLTAIRE AVE	S 34TH AVE	Minor Arterial	Asphalt	41	337	77	1,612	67	69	60	Mod	Good	15	17	**67**
38250	TIETON DR	S 34TH AVE	S 35TH AVE	Minor Arterial	Asphalt	41	324	74	1,550	74	75	60	Mod	V Good	8	19	**73**
38300	TIETON DR	S 35TH AVE	S 36TH AVE	Minor Arterial	Asphalt	41	331	75	1,583	72	73	60	Mod	V Good	12	16	**71**
38350	TIETON DR	S 36TH AVE	S 37TH AVE	Minor Arterial	Asphalt	41	497	113	2377	72	73	60	Mod	V Good	9	20	**70.9**
38380	TIETON DR	S 37TH AVE	S 38TH AVE	Minor Arterial	Asphalt	41	164	37	784	74	78	60	Mod	V Good	3	23	**74**
38400	TIETON DR	S 38TH AVE	DS@335W S 38TH AVE	Minor Arterial	Asphalt	41	335	76	1,602	75	68	60	Mod	V Good	10	16	**72**
38480	TIETON DR	DS@335W S 38TH AVE	S 40TH AVE	Minor Arterial	Asphalt	42	337	79	1651	74	59	60	Mod	Good	11	16	**67.6**
38500	TIETON DR	S 40TH AVE	DS@328W S 40TH AVE	Minor Arterial	Asphalt	52	328	95	1990	79	65	60	Mod	V Good	8	13	**73.7**
38450	TIETON DR	DS@328W S 40TH AVE	DS@651W S 40TH AVE	Minor Arterial	Asphalt	52	323	93	1960	95	87	60	Mod	Excellent	0	5	**91**
38510	TIETON DR	DS@651W S 40TH AVE	DS@968W S 40TH AVE	Minor Arterial	Asphalt	53	317	93	1,960	91	91	60	Mod	Excellent	4	5	**90**
38520	TIETON DR	DS@968W S 40TH AVE	S 44TH AVE	Minor Arterial	Asphalt	43	338	81	1,696	86	82	60	Mod	V Good	4	10	**84**
38560	TIETON DR	S 44TH AVE	S 45TH AVE	Minor Arterial	Asphalt	43	330	79	1,656	86	81	60	Mod	V Good	4	10	**84**
38630	TIETON DR	S 45TH AVE	S 46TH AVE	Minor Arterial	Asphalt	42	342	80	1676	87	74	60	Mod	V Good	4	9	**81.6**
38650	TIETON DR	S 46TH AVE	S 47TH AVE	Minor Arterial	Asphalt	44	312	76	1602	86	69	60	Mod	V Good	6	8	**79.6**
38670	TIETON DR	S 47TH AVE	S 48TH AVE	Minor Arterial	Asphalt	47	336	88	1,842	81	78	60	Mod	V Good	8	10	**79**
38590	TIETON DR	S 48TH AVE	S 49TH AVE	Minor Arterial	Asphalt	45	506	127	2,657	62	64	60	Mod	Good	21	17	**62**
38610	TIETON DR	S 49TH AVE	S 50TH AVE	Minor Arterial	Asphalt	44	339	83	1,740	74	62	60	Mod	Good	16	11	**69**
38440	TIETON DR	S 50TH AVE	S 51ST AVE	Minor Arterial	Asphalt	44	296	72	1,519	74	74	60	Mod	V Good	14	12	**73**
38420	TIETON DR	S 51ST AVE	DS@212W S 51ST AVE	Minor Arterial	Asphalt	43	212	51	1064	73	74	60	Mod	V Good	15	12	**72.3**
38370	TIETON DR	DS@212W S 51ST AVE	S 53RD AVE	Minor Arterial	Asphalt	43	366	87	1,836	75	69	60	Mod	V Good	15	11	**72**
38340	TIETON DR	S 53RD AVE	DS@312W S 53RD AVE	Minor Arterial	Asphalt	45	312	78	1638	70	74	60	Mod	V Good	16	13	**70.6**
38270	TIETON DR	DS@312W S 53RD AVE	S 56TH AVE	Minor Arterial	Asphalt	45	670	168	3,518	73	74	60	Mod	V Good	14	13	**73**
38180	TIETON DR	S 56TH AVE	DS@297W S 56TH AVE	Minor Arterial	Asphalt	53	297	87	1836	49	58	60	Mod	Fair	32	19	**50.3**
38160	TIETON DR	DS@297W S 56TH AVE	S 58TH AVE	Minor Arterial	Asphalt	43	379	91	1901	54	73	60	Mod	Good	30	16	**58.8**
38150	TIETON DR	S 58TH AVE	S 58TH AVE	Minor Arterial	Asphalt	44	152	37	780	55	82	60	Mod	Good	27	18	**62**
38130	TIETON DR	S 58TH AVE	S 59TH AVE	Minor Arterial	Asphalt	42	179	42	877	52	79	60	Mod	Good	28	20	**59.9**
38120	TIETON DR	S 59TH AVE	S 60TH AVE	Minor Arterial	Asphalt	41	343	78	1641	51	58	60	Mod	Fair	30	19	**51.8**
38100	TIETON DR	S 60TH AVE	S 61ST AVE	Minor Arterial	Asphalt	44	314	77	1612	55	78	60	Mod	Good	31	14	**61.2**
38070	TIETON DR	S 61ST AVE	S 62ND AVE	Minor Arterial	Asphalt	43	348	83	1,746	64	70	60	Mod	Good	25	11	**65**
38050	TIETON DR	S 62ND AVE	DS@346W S 62ND AVE	Minor Arterial	Asphalt	43	346	83	1736	72	88	30	Weak	V Good	18	10	**76.1**
38030	TIETON DR	DS@346W S 62ND AVE	S 64TH AVE	Minor Arterial	Asphalt	45	351	88	1,843	90	79	60	Mod	Excellent	4	6	**85**
38020	TIETON DR	S 64TH AVE	S 65TH AVE	Minor Arterial	Asphalt	51	123	35	732	89	70	60	Mod	V Good	6	5	**82**
38010	TIETON DR	S 65TH AVE	DS@396W S 65TH AVE	Minor Arterial	Asphalt	44	396	97	2,033	65	84	60	Mod	V Good	16	19	**70**
37990	TIETON DR	DS@396W S 65TH AVE	S 66TH AVE	Minor Arterial	Asphalt	41	136	31	651	56	67	60	Mod	Fair	24	21	**58**
37970	TIETON DR	S 66TH AVE	PICKENS RD	Minor Arterial	Asphalt	41	207	47	990	59	68	60	Mod	Good	21	20	**61**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
37950	TIETON DR	PICKENS RD	S 67TH AVE	Minor Arterial	Asphalt	43	224	54	1,124	61	65	60	Mod	Good	20	19	**61**
37940	TIETON DR	S 67TH AVE	S 68TH AVE	Minor Arterial	Asphalt	43	386	92	1,936	55	71	60	Mod	Good	26	19	**59**
37920	TIETON DR	S 68TH AVE	S 69TH AVE	Minor Arterial	Asphalt	44	300	73	1,540	52	66	60	Mod	Fair	26	22	**55**
37900	TIETON DR	S 69TH AVE	S 70TH AVE	Minor Arterial	Asphalt	43	296	71	1,485	58	67	60	Mod	Good	23	19	**59**
37880	TIETON DR	S 70TH AVE	S 71ST AVE	Minor Arterial	Asphalt	44	220	54	1,129	62	77	60	Mod	Good	20	18	**66**
37860	TIETON DR	S 71ST AVE	S 72ND AVE	Minor Arterial	Asphalt	45	340	85	1,785	65	64	60	Mod	Good	17	18	**63**
37850	TIETON DR	S 72ND AVE	S 74TH AVE	Minor Arterial	Asphalt	67	718	267	5,612	38	70	60	Mod	Marginal	27	35	**47**
70180	TIETON DR	S 74TH AVE	S 74TH AVE	Minor Arterial	Asphalt	56	75	23	490	34	71	60	Mod	Marginal	32	35	**45**
70190	TIETON DR	S 74TH AVE	JADE PL	Minor Arterial	Asphalt	55	71	22	456	40	75	60	Mod	Fair	30	31	**50**
70200	TIETON DR	JADE PL	S 75TH AVE	Minor Arterial	Asphalt	58	192	62	1,299	56	91	60	Mod	Good	17	27	**66**
70210	TIETON DR	S 75TH AVE	S 75TH AVE	Minor Arterial	Asphalt	55	68	21	436	57	93	60	Mod	Good	11	32	**68**
37790	TIETON DR	S 75TH AVE	S 76TH AVE	Minor Arterial	Asphalt	55	196	60	1,258	59	78	60	Mod	Good	15	26	**64**
37710	TIETON DR	S 76TH AVE	DS@189W S 76TH AVE	Minor Arterial	Asphalt	55	189	58	1,213	61	86	60	Mod	Good	14	25	**68**
37650	TIETON DR	DS@189W S 76TH AVE	DS@506W S 76TH AVE	Minor Arterial	Asphalt	56	317	99	2,071	49	93	60	Mod	Good	19	31	**63**
37620	TIETON DR	DS@506W S 76TH AVE	DS@692W S 76TH AVE	Minor Arterial	Asphalt	58	186	60	1,259	59	93	60	Mod	V Good	14	28	**69**
37590	TIETON DR	DS@692W S 76TH AVE	SUN VALLEY WY	Minor Arterial	Asphalt	67	493	184	3,854	51	88	60	Mod	Good	17	33	**62**
37470	TIETON DR	SUN VALLEY WY	DS@130W SUN VALLEY WY	Minor Arterial	Asphalt	67	130	48	1,016	51	84	60	Mod	Good	15	34	**61**
37450	TIETON DR	DS@130W SUN VALLEY WY	S 81ST AVE	Minor Arterial	Asphalt	67	195	73	1,524	48	87	60	Mod	Good	14	37	**60**
37510	TIETON DR	S 81ST AVE	S 82ND AVE	Minor Arterial	Asphalt	55	329	101	2,111	42	82	60	Mod	Fair	23	35	**54**
37520	TIETON DR	S 82ND AVE	S 82ND AVE	Minor Arterial	Asphalt	55	151	46	969	41	73	60	Mod	Fair	25	34	**50**
37540	TIETON DR	S 82ND AVE	S 83RD AVE	Minor Arterial	Asphalt	55	260	79	1668	48	90	60	Mod	Good	19	34	**60.7**
37570	TIETON DR	S 83RD AVE	DS@416W S 83RD AVE	Minor Arterial	Asphalt	55	416	127	2669	49	91	60	Mod	Good	17	34	**61.2**
37580	TIETON DR	DS@416W S 83RD AVE	S 87TH AVE	Minor Arterial	Asphalt	55	746	228	4787	59	96	60	Mod	V Good	11	30	**70.2**
37600	TIETON DR	S 87TH AVE	S 88TH AVE	Minor Arterial	Asphalt	67	542	202	4237	52	89	60	Mod	Good	13	35	**62.7**
37630	TIETON DR	S 88TH AVE	S 90TH AVE	Minor Arterial	Asphalt	58	890	287	6022	56	95	60	Mod	Good	9	35	**67.6**
37640	TIETON DR	S 90TH AVE	S 92ND AVE	Minor Arterial	Asphalt	55	432	132	2,772	55	92	60	Mod	Good	14	31	**66**
37660	TIETON DR	S 92ND AVE	DS@415W S 92ND AVE	Minor Arterial	Asphalt	54	415	125	2,615	59	96	60	Mod	V Good	10	32	**70**
37740	TIETON DR	DS@415W S 92ND AVE	S 96TH AVE	Minor Arterial	Asphalt	55	911	278	5,846	59	92	60	Mod	V Good	10	30	**69**
37760	TIETON DR	S 96TH AVE	S 98TH AVE	Minor Arterial	Asphalt	43	863	206	4329	63	88	60	Mod	V Good	10	28	**70**
33590	TORREY PINES LN	S 93RD AVE	SAINT ANDREWS PL	Local	Asphalt	28	247	38	807	44	49	80	Strng	Marginal	18	38	**44.7**
33580	TORREY PINES LN	SAINT ANDREWS PL	S 94TH AVE	Local	Asphalt	27	249	37	784	50	53	80	Strng	Fair	13	37	**50**
72990	TRIPLE CROWN WY	CASTLEVALE RD	NE END	Local	Asphalt	29	549	89	1876	59	57	80	Strng	Fair	9	32	**57.1**
18440	UNION ST	N 9TH ST	PITCHER ST	Local	Asphalt	37	189	39	816	59	27	80	Strng	Marginal	13	27	**47.6**
19030	UNION ST	PITCHER ST	DS@110S PITCHER ST	Local	Asphalt	37	110	23	475	46	47	80	Strng	Marginal	23	31	**45.3**
19610	UNION ST	DS@110S PITCHER ST	E CHESTNUT AVE	Local	Asphalt	37	175	36	755	50	47	60	Mod	Marginal	31	19	**48**
21230	UNION ST	E CHESTNUT AVE	FENTON ST	Local	Asphalt	25	305	42	890	41	41	60	Mod	Marginal	35	24	**40**
22050	UNION ST	FENTON ST	E WALNUT ST	Local	Asphalt	20	201	22	469	79	60	60	Mod	V Good	7	14	**72**
23330	UNION ST	E WALNUT ST	E SPRUCE ST	Local	Asphalt	22	327	40	839	68	63	80	Strng	Good	6	26	**65**
24160	UNION ST	E SPRUCE ST	DS@255S E SPRUCE ST	Local	Asphalt	22	255	31	655	77	57	80	Strng	V Good	1	22	**70**
26800	UNION ST	DS@255S E SPRUCE ST	E PINE ST	Local	Asphalt	21	439	51	1,076	87	68	60	Mod	V Good	3	10	**80**
34720	UNKNOWN - 34720	LABAN AVE	S 23RD AVE	Local	Asphalt	26	43	6	130	53	42	60	Mod	Marginal	31	15	**48**
56550	UNKNOWN - 56550	S 32ND AVE	S 32ND AVE	Local	Asphalt	39	248	54	1,128	39	52	80	Strng	Marginal	28	33	**43**
76100	UNKNOWN - 76100	S 73RD AVE	WHITMAN ST	Other	Asphalt	28	1,164	181	3,802	100	90	60	Mod	Excellent	0	0	**96**
76110	UNKNOWN - 76110	UNKNOWN - 76120	WHITMAN ST	Other	Asphalt	28	456	71	1,490	91	75	60	Mod	Excellent	3	6	**85**
76120	UNKNOWN - 76120	S 73RD AVE	UNKNOWN - 76110	Other	Asphalt	27	476	71	1,499	94	83	60	Mod	Excellent	0	6	**89**
76130	UNKNOWN - 76130	UNKNOWN - 76120	UNKNOWN - 76100	Other	Asphalt	27	408	61	1,285	94	83	60	Mod	Excellent	0	6	**89**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
76190	UNKNOWN - 76190	COOLIDGE RD	SOUTH END	Other	Asphalt	28	1,406	219	4,593	98	89	60	Mod	Excellent	0	2	**94**
76200	UNKNOWN - 76200	VISTA RIDGE AVE	UNKNOWN - 76190	Other	Asphalt	27	262	39	825	94	82	60	Mod	Excellent	0	6	**89**
76400	UNKNOWN - 76400	S 61ST AVE	S 62ND AVE	Other	Asphalt	29	1,673	270	5,660	90	78	60	Mod	Excellent	7	4	**85**
76410	UNKNOWN - 76410	S 62ND AVE	S 61ST AVE	Other	Asphalt	28	624	97	2,038	94	83	60	Mod	Excellent	5	1	**90**
21670	UPLANDS WY	N 42ND AVE	DS@338W N 42ND AVE	Local	Asphalt	30	338	56	1,183	68	55	80	Strng	Good	9	23	**63**
21650	UPLANDS WY	DS@338W N 42ND AVE	N 44TH AVE	Local	Asphalt	29	308	50	1,042	73	80	60	Mod	V Good	4	22	**75**
21640	UPLANDS WY	N 44TH AVE	DS@333W N 44TH AVE	Local	Asphalt	28	333	52	1,088	73	63	60	Mod	Good	14	14	**69**
21630	UPLANDS WY	DS@333W N 44TH AVE	N 46TH AVE	Local	Asphalt	29	337	54	1,140	74	58	60	Mod	Good	8	18	**68**
58240	VALLEY WEST AVE	W MEAD AVE	W PIERCE ST	Local	Asphalt	34	1,169	221	4,637	54	69	80	Strng	Fair	12	34	**58**
27110	VENDOME AVE	EAST END	VENDOME DR	Local	Asphalt	15	52	4	91	88	69	60	Mod	V Good	0	12	**81**
27130	VENDOME AVE	VENDOME DR	WEST END	Local	Asphalt	17	83	8	165	43	35	80	Strng	Marginal	27	30	**39**
27120	VENDOME DR	VENDOME AVE	SUMMITVIEW AVE	Local	Asphalt	24	231	31	647	49	22	80	Strng	Poor	13	39	**39**
36750	VIEW HAVEN DR	S 60TH AVE	S 61ST AVE	Local	Asphalt	30	301	50	1054	73	64	60	Mod	V Good	5	22	**68.9**
16870	VIEWCREST PL	ENGLEWOOD CREST DR	NORTH END	Local	Asphalt	44	219	54	1,133	70	46	80	Strng	Good	8	23	**61**
71370	VIEWCREST WY	ENGLEWOOD CREST DR	VIEWMONT DR	Local	Asphalt	24	596	79	1,669	23	39	80	Strng	Poor	46	30	**28**
16190	VIEWCREST WY	VIEWMONT DR	VIEWMONT DR	Local	Asphalt	29	170	27	575	71	48	80	Strng	Good	9	21	**62.2**
70900	VIEWCREST WY	VIEWMONT DR	N 84TH AVE	Local	Asphalt	30	658	110	2303	81	68	60	Mod	V Good	5	14	**75.7**
69950	VIEWMONT DR	SUNSET AVE	DS@1372W SUNSET AVE	Local	Asphalt	27	1,372	206	4,322	61	42	80	Strng	Fair	19	21	**54**
19860	VIEWMONT DR	DS@1372W SUNSET AVE	VIEWMONT PL	Local	Asphalt	25	659	92	1922	51	60	60	Mod	Fair	25	22	**52.9**
17280	VIEWMONT DR	VIEWMONT PL	VIEWCREST WY	Local	Asphalt	24	296	39	829	56	58	60	Mod	Fair	20	25	**55**
15170	VIEWMONT DR	VIEWCREST WY	NW END	Local	Asphalt	22	1469	180	3770	49	60	80	Strng	Fair	22	13	**51.5**
17310	VIEWMONT PL	EAST END	VIEWMONT DR	Local	Asphalt	32	222	40	839	66	39	60	Mod	Fair	19	15	**55.5**
18540	VIEWMONT PL	VIEWMONT DR	SW END	Local	Asphalt	30	405	68	1,430	81	62	60	Mod	V Good	5	15	**74**
49700	VINCENTA WY	S 32ND AVE	S 33RD AVE	Local	Asphalt	30	364	61	1,274	64	50	80	Strng	Fair	8	28	**58**
49640	VINCENTA WY	S 34TH AVE	WEST END	Local	Asphalt	33	239	44	914	46	37	80	Strng	Marginal	16	37	**42.3**
53280	VIOLA AVE	S 22ND ST	EAST END	Local	Asphalt	30	280	47	980	59	52	80	Strng	Fair	12	29	**55.8**
53210	VIOLA AVE	S 18TH ST	S 19TH ST	Major Collector	Asphalt	34	329	62	1,305	79	60	60	Mod	V Good	11	10	**72**
53220	VIOLA AVE	S 19TH ST	DS@333E S 19TH ST	Major Collector	Asphalt	21	333	39	816	78	59	60	Mod	V Good	10	12	**70.6**
53270	VIOLA AVE	DS@333E S 19TH ST	RUDKIN RD	Major Collector	Asphalt	21	632	74	1548	69	45	60	Mod	Good	15	15	**60.1**
53100	VIOLA AVE	S 1ST ST	DS@684E S 1ST ST	Major Collector	Asphalt	30	684	114	2394	61	62	80	Strng	Good	12	27	**60.1**
53140	VIOLA AVE	DS@684E S 1ST ST	DS@1065E S 1ST ST	Major Collector	Asphalt	22	381	47	978	51	47	80	Strng	Marginal	15	33	**48.2**
53130	VIOLA AVE	DS@1065E S 1ST ST	S FAIR AVE	Major Collector	Asphalt	33	424	78	1632	33	44	80	Strng	Poor	37	30	**35.4**
52890	VIOLA AVE	VOELKER AVE	DS@154W VOELKER AVE	Local	Asphalt	30	154	26	539	31	34	80	Strng	Poor	42	27	**31.1**
52870	VIOLA AVE	DS@154W VOELKER AVE	LEDWICH AVE	Local	Asphalt	30	176	29	616	22	44	60	Mod	Poor	50	28	**28**
52860	VIOLA AVE	LEDWICH AVE	ROCK AVE	Local	Asphalt	29	331	53	1120	35	46	60	Mod	Poor	39	26	**37.5**
52840	VIOLA AVE	ROCK AVE	DS@163W ROCK AVE	Local	Asphalt	29	163	26	551	28	43	60	Mod	Poor	44	28	**32.2**
52820	VIOLA AVE	DS@163W ROCK AVE	LANDON AVE	Local	Asphalt	29	166	27	562	84	80	60	Mod	V Good	0	16	**81.6**
52810	VIOLA AVE	LANDON AVE	DS@167W LANDON AVE	Local	Asphalt	29	167	27	565	71	54	60	Mod	Good	10	19	**64.5**
52760	VIOLA AVE	DS@167W LANDON AVE	S 1ST AVE	Local	Asphalt	28	161	25	526	37	48	60	Mod	Marginal	38	25	**39.3**
52690	VIOLA AVE	S 1ST AVE	S 2ND AVE	Local	Asphalt	29	334	54	1130	33	36	80	Strng	Poor	32	35	**33.1**
52630	VIOLA AVE	S 2ND AVE	S 3RD AVE	Local	Asphalt	30	331	55	1159	66	39	80	Strng	Fair	13	21	**56.3**
52720	VIOLA AVE	S 3RD AVE	S 4TH AVE	Local	Asphalt	28	333	52	1088	82	64	60	Mod	V Good	0	18	**75.4**
52770	VIOLA AVE	S 4TH AVE	S 5TH AVE	Local	Asphalt	30	327	55	1145	83	64	60	Mod	V Good	0	17	**75.7**
52790	VIOLA AVE	S 5TH AVE	S 6TH AVE	Local	Asphalt	28	327	51	1068	71	50	60	Mod	Good	19	9	**63**
52750	VIOLA AVE	S 6TH AVE	CORNELL AVE	Local	Asphalt	29	335	54	1133	86	67	60	Mod	V Good	0	14	**78.6**
52710	VIOLA AVE	CORNELL AVE	S 7TH AVE	Local	Asphalt	29	324	52	1096	78	58	60	Mod	V Good	10	12	**70.4**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
52670	VIOLA AVE	S 7TH AVE	S 8TH AVE	Local	Asphalt	29	324	52	1096	76	56	60	Mod	Good	8	15	**68.9**
52650	VIOLA AVE	S 8TH AVE	S 9TH AVE	Local	Asphalt	29	321	52	1086	76	56	80	Strng	Good	5	18	**68.9**
52600	VIOLA AVE	S 9TH AVE	S 10TH AVE	Local	Asphalt	29	333	54	1127	87	68	60	Mod	V Good	3	10	**79.6**
52560	VIOLA AVE	S 10TH AVE	S 11TH AVE	Local	Asphalt	28	318	49	1039	64	43	80	Strng	Fair	17	20	**55.8**
52580	VIOLA AVE	S 11TH AVE	PLEASANT AVE	Local	Asphalt	26	333	48	1010	58	45	80	Strng	Fair	20	21	**52.9**
52530	VIOLA AVE	PLEASANT AVE	QUEEN AVE	Local	Asphalt	28	333	52	1088	83	64	60	Mod	V Good	0	18	**75.5**
70310	VIOLA AVE	QUEEN AVE	S 12TH AVE	Local	Asphalt	28	318	49	1039	63	58	80	Strng	Good	11	26	**60.1**
52500	VIOLA AVE	S 12TH AVE	S 13TH AVE	Local	Asphalt	22	328	40	842	87	68	60	Mod	V Good	0	13	**79.8**
52520	VIOLA AVE	S 13TH AVE	S 14TH AVE	Local	Asphalt	22	321	39	824	76	56	60	Mod	Good	9	14	**68.5**
52450	VIOLA AVE	S 14TH AVE	S 15TH AVE	Local	Asphalt	22	325	40	834	70	47	80	Strng	Good	12	17	**61.7**
52470	VIOLA AVE	S 15TH AVE	S 16TH AVE	Local	Asphalt	21	340	40	833	72	50	80	Strng	Good	5	23	**63.7**
52410	VIOLA AVE	S 20TH AVE	S 21ST AVE	Local	Asphalt	30	338	56	1183	66	40	80	Strng	Fair	10	24	**56.9**
52390	VIOLA AVE	S 21ST AVE	S 22ND AVE	Local	Asphalt	29	335	54	1133	77	58	80	Strng	V Good	2	20	**70**
52340	VIOLA AVE	S 22ND AVE	DS@318W S 22ND AVE	Local	Asphalt	29	318	51	1076	61	50	80	Strng	Fair	8	31	**56**
52320	VIOLA AVE	DS@318W S 22ND AVE	S 24TH AVE	Local	Asphalt	30	329	55	1152	66	55	60	Mod	Good	15	19	**61.4**
51770	VIOLA AVE	S 25TH AVE	HAMILTON AVE	Local	Asphalt	30	238	40	833	71	59	80	Strng	Good	3	26	**66.2**
51750	VIOLA AVE	HAMILTON AVE	S 26TH AVE	Local	Asphalt	28	249	39	813	82	63	60	Mod	V Good	7	11	**75.2**
51760	VIOLA AVE	S 26TH AVE	KARR AVE	Local	Asphalt	29	242	39	819	65	51	80	Strng	Good	3	31	**59.6**
52200	VIOLA AVE	KARR AVE	S 28TH AVE	Local	Asphalt	30	295	49	1033	67	54	60	Mod	Good	14	19	**61.2**
52150	VIOLA AVE	S 28TH AVE	S 29TH AVE	Local	Asphalt	28	303	47	990	55	43	80	Strng	Fair	19	26	**50**
52120	VIOLA AVE	S 29TH AVE	DS@231W S 29TH AVE	Local	Asphalt	28	231	36	755	51	48	80	Strng	Fair	16	33	**49.1**
52090	VIOLA AVE	DS@231W S 29TH AVE	S 31ST AVE	Local	Asphalt	30	300	50	1050	30	39	80	Strng	Poor	38	32	**32.2**
52070	VIOLA AVE	S 31ST AVE	S 32ND AVE	Local	Asphalt	30	328	55	1148	51	48	80	Strng	Fair	14	35	**49.4**
52940	VIOLA AVE	S 32ND AVE	S 33RD AVE	Local	Asphalt	33	359	66	1382	66	58	80	Strng	Good	5	29	**62.7**
52960	VIOLA AVE	S 33RD AVE	S 34TH AVE	Local	Asphalt	33	300	55	1155	56	68	80	Strng	Good	0	44	**59.3**
52230	VIOLA AVE	S 40TH AVE	S 41ST AVE	Local	Asphalt	26	326	47	989	45	31	80	Strng	Marginal	29	26	**39**
52270	VIOLA AVE	S 41ST AVE	S 42ND AVE	Local	Asphalt	29	328	53	1110	64	40	80	Strng	Fair	15	21	**55.2**
52280	VIOLA AVE	S 42ND AVE	S 43RD AVE	Local	Asphalt	28	324	50	1058	67	42	80	Strng	Fair	10	22	**58**
52290	VIOLA AVE	S 43RD AVE	S 44TH AVE	Local	Asphalt	28	337	52	1101	68	43	80	Strng	Fair	9	23	**58.8**
52310	VIOLA AVE	S 44TH AVE	DS@181W S 44TH AVE	Local	Asphalt	28	181	28	591	72	56	80	Strng	Good	4	23	**66.2**
52250	VIOLA AVE	DS@181W S 44TH AVE	VIOLA PL	Local	Asphalt	27	80	12	252	66	40	80	Strng	Fair	9	25	**56.3**
52180	VIOLA AVE	VIOLA PL	S 46TH AVE	Local	Asphalt	29	214	34	724	34	32	80	Strng	Poor	32	34	**31.9**
53240	VIOLA AVE	S 48TH AVE	DS@430W S 48TH AVE	Local	Asphalt	28	430	67	1405	34	48	80	Strng	Poor	33	34	**37.5**
53180	VIOLA AVE	DS@430W S 48TH AVE	CASTLEVIEW DR	Local	Asphalt	27	252	38	794	63	44	80	Strng	Fair	13	24	**55.5**
53170	VIOLA AVE	CASTLEVIEW DR	DS@199W CASTLEVIEW DR	Local	Asphalt	29	199	32	673	68	44	80	Strng	Good	6	26	**59.3**
53110	VIOLA AVE	DS@199W CASTLEVIEW DR	WEST END	Local	Asphalt	43	74	18	370	65	38	80	Strng	Fair	8	26	**55.5**
51990	VIOLA AVE	S 72ND AVE	S 75TH AVE	Local	Asphalt	28	852	133	2783	61	70	60	Mod	Good	15	24	**62.7**
52360	VIOLA CT	EAST END	S 36TH AVE	Local	Asphalt	33	451	83	1744	64	53	80	Strng	Good	11	26	**59.3**
52490	VIOLA PL	W VIOLA AVE	S 46TH AVE	Local	Asphalt	29	368	59	1245	69	45	80	Strng	Good	8	23	**60.4**
76180	VISTA RIDGE AVE	S 70TH AVE	UNKNOWN - 76200	Other	Asphalt	27	544	82	1714	97	88	60	Mod	Excellent	0	3	**93**
52880	VOELKER AVE	W PRASCH AVE	W VIOLA AVE	Local	Asphalt	23	666	85	1787	78	74	60	Mod	V Good	5	18	**75.5**
54920	VOELKER AVE	W VIOLA AVE	W LOGAN AVE	Local	Asphalt	29	664	107	2247	46	48	80	Strng	Marginal	24	31	**45.3**
57400	VOELKER AVE	W MEAD AVE	BALDIE WY	Local	Asphalt	28	542	84	1771	85	66	60	Mod	V Good	4	11	**77.8**
57910	VOELKER AVE	BALDIE WY	W KING ST	Local	Asphalt	27	125	19	394	89	70	60	Mod	V Good	0	11	**82.2**
59030	VOELKER AVE	W KING ST	W PIERCE ST	Local	Asphalt	28	640	100	2091	88	79	60	Mod	V Good	4	9	**84.1**
40640	VOLTAIRE AVE	TIETON DR	S 32ND AVE	Local	Asphalt	22	914	112	2346	76	56	60	Mod	Good	9	16	**68**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
42150	WALKER ST	S 9TH ST	S FAIR AVE	Local	Asphalt	21	495	58	1213	82	63	60	Mod	V Good	7	11	**74.6**
71020	WALLA WALLA ST	S 16TH AVE	DS@529W S 16TH AVE	Local	Asphalt	19	529	56	1173	73	53	80	Strng	Good	8	20	**65.2**
16160	WALLY LN	N 26TH AVE	N 27TH AVE	Local	Asphalt	21	310	36	760	83	65	60	Mod	V Good	4	13	**76.4**
74980	WALMART PARKING LOT	S 64TH AVE	DS@714W S 64TH AVE	Other	Asphalt	42	714	167	3499	65	55	60	Mod	Good	17	18	**60.1**
74990	WALMART PARKING LOT	DS@714W S 64TH AVE	W NOB HILL BLVD	Other	Asphalt	26	1429	206	4335	73	69	60	Mod	V Good	11	16	**71.3**
74970	WALMART PARKING LOT	W NOB HILL BLVD	WALMART PARKING LOT	Other	Asphalt	31	769	132	2781	61	48	80	Strng	Fair	12	27	**55.8**
21390	WALNUT ST	S 10TH ST	EAST END	Local	Asphalt	37	169	35	735	87	68	60	Mod	V Good	0	13	**80.2**
22340	WALNUT ST	S 8TH ST	UNION ST	Local	Asphalt	32	207	37	773	62	37	80	Strng	Fair	16	22	**52.6**
23300	WALNUT ST	S 6TH ST	DS@200E S 6TH ST	Major Collector	Asphalt	40	200	44	933	86	67	60	Mod	V Good	1	14	**78.6**
23100	WALNUT ST	DS@200E S 6TH ST	S 7TH ST	Major Collector	Asphalt	40	191	42	891	84	75	60	Mod	V Good	5	11	**80.5**
22700	WALNUT ST	S 7TH ST	DS@186E S 7TH ST	Major Collector	Asphalt	32	186	33	694	76	64	60	Mod	V Good	15	9	**71.1**
22540	WALNUT ST	DS@186E S 7TH ST	S 8TH ST	Major Collector	Asphalt	32	192	34	717	70	46	60	Mod	Good	16	15	**60.7**
26630	WALNUT ST	S 1ST ST	DS@203E S 1ST ST	Minor Arterial	Asphalt	59	203	67	1397	71	50	80	Strng	Good	9	20	**62.2**
26130	WALNUT ST	DS@203E S 1ST ST	S 2ND ST	Minor Arterial	Asphalt	59	199	65	1370	74	62	80	Strng	Good	4	22	**68.5**
25480	WALNUT ST	S 2ND ST	DS@203E S 2ND ST	Minor Arterial	Asphalt	56	203	63	1326	78	67	60	Mod	V Good	3	19	**73.3**
25260	WALNUT ST	DS@203E S 2ND ST	S 3RD ST	Minor Arterial	Asphalt	55	196	60	1258	76	80	60	Mod	V Good	6	18	**76.6**
24640	WALNUT ST	S 3RD ST	DS@204E S 3RD ST	Minor Arterial	Asphalt	55	204	62	1309	77	76	60	Mod	V Good	3	20	**75.5**
24550	WALNUT ST	DS@204E S 3RD ST	S 4TH ST	Minor Arterial	Asphalt	56	198	62	1294	84	86	60	Mod	V Good	0	16	**83.7**
24180	WALNUT ST	S 4TH ST	DS@199E S 4TH ST	Minor Arterial	Asphalt	60	199	66	1393	77	85	60	Mod	V Good	0	23	**78.8**
24000	WALNUT ST	DS@199E S 4TH ST	S NACHES AVE	Minor Arterial	Asphalt	61	220	75	1566	80	79	60	Mod	V Good	0	20	**78.5**
23760	WALNUT ST	S NACHES AVE	DS@219E S NACHES AVE	Minor Arterial	Asphalt	52	219	63	1329	83	75	60	Mod	V Good	4	13	**79.3**
23610	WALNUT ST	DS@219E S NACHES AVE	S 6TH ST	Minor Arterial	Asphalt	51	201	57	1196	82	67	60	Mod	V Good	0	17	**76.4**
27150	WALNUT ST	S FRONT ST	DS@184E S FRONT ST	Truck Route	Asphalt	59	184	60	1267	86	70	60	Mod	V Good	0	14	**79.8**
26870	WALNUT ST	DS@184E S FRONT ST	S 1ST ST	Truck Route	Asphalt	59	199	65	1370	70	58	60	Mod	Good	15	15	**64.7**
27550	WALNUT ST	E WALNUT ST	DS@242W E WALNUT ST	Truck Route	Asphalt	57	242	77	1609	86	82	60	Mod	V Good	5	10	**83.7**
28120	WALNUT ST	DS@242W E WALNUT ST	S 1ST AVE	Truck Route	Asphalt	55	307	94	1970	90	93	60	Mod	Excellent	0	10	**90.1**
28510	WALNUT ST	S 1ST AVE	S 2ND AVE	Truck Route	Asphalt	55	387	118	2483	81	77	60	Mod	V Good	9	10	**78.8**
28860	WALNUT ST	S 2ND AVE	DS@197W S 2ND AVE	Truck Route	Asphalt	51	197	56	1172	78	66	60	Mod	V Good	9	13	**72.7**
29120	WALNUT ST	DS@197W S 2ND AVE	S 3RD AVE	Truck Route	Asphalt	49	202	55	1155	84	65	60	Mod	V Good	0	16	**76.8**
29600	WALNUT ST	S 3RD AVE	DS@202W S 3RD AVE	Truck Route	Asphalt	48	202	54	1131	69	54	60	Mod	Good	11	20	**63**
29970	WALNUT ST	DS@202W S 3RD AVE	S 4TH AVE	Truck Route	Asphalt	47	203	53	1113	80	65	80	Strng	V Good	0	20	**74.2**
30160	WALNUT ST	S 4TH AVE	DS@196W S 4TH AVE	Truck Route	Asphalt	48	196	52	1098	83	70	60	Mod	V Good	0	17	**78.1**
30460	WALNUT ST	DS@196W S 4TH AVE	S 5TH AVE	Truck Route	Asphalt	50	201	56	1173	81	70	60	Mod	V Good	4	15	**76.8**
30620	WALNUT ST	S 5TH AVE	DS@203W S 5TH AVE	Minor Arterial	Asphalt	53	203	60	1255	83	65	60	Mod	V Good	0	17	**76.3**
31030	WALNUT ST	DS@203W S 5TH AVE	S 6TH AVE	Minor Arterial	Asphalt	49	196	53	1120	73	73	60	Mod	V Good	9	18	**71.7**
31370	WALNUT ST	S 6TH AVE	DS@205W S 6TH AVE	Minor Arterial	Asphalt	41	205	47	981	98	89	60	Mod	Excellent	1	1	**94**
31490	WALNUT ST	DS@205W S 6TH AVE	S 7TH AVE	Minor Arterial	Asphalt	40	183	41	854	85	66	60	Mod	V Good	5	10	**78**
32070	WALNUT ST	S 7TH AVE	DS@195W S 7TH AVE	Local	Asphalt	30	195	33	683	66	39	80	Strng	Fair	15	19	**56**
32280	WALNUT ST	DS@195W S 7TH AVE	S 8TH AVE	Local	Asphalt	30	189	32	662	51	59	80	Strng	Fair	15	34	**52.6**
32660	WALNUT ST	S 8TH AVE	DS@190W S 8TH AVE	Local	Asphalt	30	190	32	665	52	56	80	Strng	Fair	16	32	**52**
33480	WALNUT ST	DS@190W S 8TH AVE	S 9TH AVE	Local	Asphalt	30	185	31	648	51	66	60	Mod	Fair	22	27	**55.2**
33640	WALNUT ST	S 9TH AVE	DS@193W S 9TH AVE	Local	Asphalt	32	193	34	721	42	71	80	Strng	Fair	22	36	**50.9**
33920	WALNUT ST	DS@193W S 9TH AVE	S 10TH AVE	Local	Asphalt	32	189	34	706	51	64	80	Strng	Fair	18	31	**54.1**
34040	WALNUT ST	S 10TH AVE	DS@190W S 10TH AVE	Local	Asphalt	29	190	31	643	54	69	80	Strng	Fair	5	41	**58.2**
34170	WALNUT ST	DS@190W S 10TH AVE	S 11TH AVE	Local	Asphalt	31	188	32	680	50	49	80	Strng	Marginal	18	31	**48.5**
34420	WALNUT ST	S 12TH AVE	DS@173W S 12TH AVE	Local	Asphalt	24	173	23	484	61	45	60	Mod	Fair	22	18	**54.3**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
34450	WALNUT ST	DS@173W S 12TH AVE	S 13TH AVE	Local	Asphalt	24	170	23	476	63	67	80	Strng	Good	9	28	**63.7**
34460	WALNUT ST	S 13TH AVE	DS@168W S 13TH AVE	Local	Asphalt	20	168	19	392	61	57	80	Strng	Fair	10	29	**59.1**
34430	WALNUT ST	DS@168W S 13TH AVE	S 14TH AVE	Local	Asphalt	22	174	21	447	61	46	80	Strng	Fair	12	28	**54.6**
36210	WALNUT ST	S 25TH AVE	DS@161W S 25TH AVE	Local	Asphalt	21	161	19	394	78	59	60	Mod	V Good	10	12	**70.9**
36190	WALNUT ST	DS@161W S 25TH AVE	S 26TH AVE	Local	Asphalt	21	171	20	419	48	37	80	Strng	Marginal	20	32	**43.5**
36040	WALNUT ST	S 26TH AVE	DS@150W S 26TH AVE	Local	Asphalt	20	150	17	350	46	21	80	Strng	Poor	19	36	**36.3**
36020	WALNUT ST	DS@150W S 26TH AVE	S 27TH AVE	Local	Asphalt	21	158	18	387	21	32	80	Strng	V Poor	39	40	**23.8**
36010	WALNUT ST	S 27TH AVE	S 28TH AVE	Local	Asphalt	21	339	40	831	31	36	80	Strng	Poor	33	36	**31.4**
35990	WALNUT ST	S 28TH AVE	DS@334W S 28TH AVE	Local	Asphalt	28	334	52	1091	56	47	60	Mod	Fair	24	20	**51.8**
35910	WALNUT ST	DS@334W S 28TH AVE	S 30TH AVE	Local	Asphalt	28	340	53	1111	84	65	60	Mod	V Good	8	8	**77**
35610	WALNUT ST	S 34TH AVE	S 35TH AVE	Local	Asphalt	29	317	51	1073	57	37	80	Strng	Fair	14	29	**49.7**
35640	WALNUT ST	S 35TH AVE	S 36TH AVE	Local	Asphalt	27	327	49	1030	72	50	80	Strng	Good	5	23	**63.7**
35700	WALNUT ST	DELMAR TER	S 37TH AVE	Local	Asphalt	30	175	29	613	79	60	80	Strng	V Good	0	21	**71.7**
35740	WALNUT ST	S 37TH AVE	S 38TH AVE	Local	Asphalt	30	299	50	1047	69	49	80	Strng	Good	5	26	**61.4**
35750	WALNUT ST	S 38TH AVE	S 39TH AVE	Local	Asphalt	28	198	31	647	63	43	80	Strng	Fair	3	34	**55.5**
35790	WALNUT ST	S 39TH AVE	S 40TH AVE	Local	Asphalt	30	350	58	1225	64	50	80	Strng	Fair	11	25	**58.5**
35810	WALNUT ST	S 40TH AVE	DS@312W S 40TH AVE	Local	Asphalt	33	312	57	1201	58	35	80	Strng	Fair	14	28	**49.1**
35780	WALNUT ST	DS@312W S 40TH AVE	WESTOVER DR	Local	Asphalt	33	108	20	416	62	56	80	Strng	Good	11	26	**59.1**
35830	WALNUT ST	WESTOVER DR	WESTOVER DR	Local	Asphalt	27	81	12	255	64	42	80	Strng	Fair	0	36	**55.5**
35850	WALNUT ST	WESTOVER DR	CHISHOLM TL	Local	Asphalt	28	333	52	1088	34	36	80	Strng	Poor	36	30	**34**
35960	WALNUT ST	S 44TH AVE	S 45TH AVE	Local	Asphalt	28	332	52	1085	64	43	80	Strng	Fair	10	26	**56**
35940	WALNUT ST	S 45TH AVE	S 46TH AVE	Local	Asphalt	30	335	56	1173	64	40	80	Strng	Fair	10	26	**54.9**
36060	WALNUT ST	S 46TH AVE	S 47TH AVE	Local	Asphalt	29	317	51	1073	73	54	80	Strng	Good	6	21	**66.2**
36140	WALNUT ST	S 47TH AVE	S 48TH AVE	Local	Asphalt	21	336	39	823	70	46	80	Strng	Good	10	20	**60.9**
35730	WALNUT ST	EAST END	S 50TH AVE	Local	Asphalt	11	140	9	180	64	36	80	Strng	Fair	11	25	**53.8**
36000	WALNUT ST	S 50TH AVE	S 51ST AVE	Local	Asphalt	18	340	34	714	63	61	60	Mod	Good	22	15	**61.2**
35500	WALNUT ST	S 57TH AVE	S 58TH AVE	Local	Asphalt	29	336	54	1137	70	48	80	Strng	Good	7	23	**61.4**
35480	WALNUT ST	S 58TH AVE	S 59TH AVE	Local	Asphalt	30	338	56	1183	71	48	80	Strng	Good	9	20	**62.2**
35460	WALNUT ST	S 59TH AVE	S 60TH AVE	Local	Asphalt	29	337	54	1140	69	49	80	Strng	Good	6	25	**61.4**
35440	WALNUT ST	S 60TH AVE	S 61ST AVE	Local	Asphalt	29	340	55	1150	72	60	60	Mod	Good	8	20	**66.9**
35420	WALNUT ST	S 61ST AVE	S 62ND AVE	Local	Asphalt	29	339	55	1147	71	63	80	Strng	Good	6	23	**67.3**
35350	WALNUT ST	S 62ND AVE	S 63RD AVE	Local	Asphalt	27	268	40	844	79	64	60	Mod	V Good	3	17	**73.5**
35330	WALNUT ST	S 63RD AVE	S 64TH AVE	Local	Asphalt	17	270	26	536	75	57	80	Strng	Good	3	21	**68.5**
35270	WALNUT ST	S 64TH AVE	S 65TH AVE	Local	Asphalt	12	264	18	370	73	51	80	Strng	Good	4	23	**65**
35290	WALNUT ST	S 65TH AVE	PARSONS AVE	Local	Asphalt	26	266	38	807	63	49	60	Mod	Fair	19	19	**56.6**
35250	WALNUT ST	PARSONS AVE	DS@133W PARSONS AVE	Local	Asphalt	25	133	18	388	78	59	80	Strng	V Good	1	21	**70.9**
35220	WALNUT ST	DS@133W PARSONS AVE	S 66TH AVE	Local	Asphalt	33	122	22	470	32	37	80	Strng	Poor	37	31	**32.5**
35590	WALNUT ST	S 68TH AVE	S 69TH AVE	Local	Asphalt	33	326	60	1255	70	47	80	Strng	Good	5	25	**61.4**
35560	WALNUT ST	S 69TH AVE	S 70TH AVE	Local	Asphalt	32	327	58	1221	72	49	80	Strng	Good	3	25	**63.2**
35260	WALNUT ST	S 74TH AVE	S 75TH PL	Local	Asphalt	29	256	41	866	57	59	80	Strng	Fair	6	37	**56.6**
35210	WALNUT ST	S 75TH PL	S 76TH AVE	Local	Asphalt	30	273	46	956	54	52	80	Strng	Fair	9	36	**52.6**
70730	WALNUT ST	EAST END	S 92ND AVE	Local	Asphalt	28	203	32	663	60	49	80	Strng	Fair	10	30	**54.9**
35070	WALNUT ST	S 93RD AVE	S 93RD AVE	Local	Asphalt	27	108	16	340	68	57	80	Strng	Good	10	22	**63.5**
35050	WALNUT ST	S 93RD AVE	SAINT ANDREWS PL	Local	Asphalt	27	141	21	444	77	70	80	Strng	V Good	0	23	**73.9**
35040	WALNUT ST	SAINT ANDREWS PL	S 94TH AVE	Local	Asphalt	28	249	39	813	76	57	80	Strng	V Good	0	24	**69.4**
36170	WALNUT ST	S 94TH AVE	S 96TH AVE	Local	Asphalt	29	498	80	1685	59	50	80	Strng	Fair	12	28	**55.2**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
61200	WASHINGTON AVE	S 1ST ST	DS@228E S 1ST ST	Minor Arterial	Asphalt	58	228	73	1543	72	49	80	Strng	Good	6	23	**63**
61180	WASHINGTON AVE	DS@228E S 1ST ST	DS@372E S 1ST ST	Minor Arterial	Asphalt	52	144	42	874	91	73	60	Mod	V Good	0	9	**84**
61260	WASHINGTON AVE	DS@372E S 1ST ST	S 14TH ST	Minor Arterial	Asphalt	46	814	208	4368	70	80	60	Mod	V Good	15	15	**72.5**
61230	WASHINGTON AVE	W WASHINGTON AVE	FORNEY RD	Truck Route	Asphalt	47	343	90	1881	75	55	60	Mod	Good	7	18	**67.1**
61240	WASHINGTON AVE	FORNEY RD	S 1ST ST	Truck Route	Asphalt	48	1159	309	6490	76	78	60	Mod	V Good	8	17	**75.7**
61190	WASHINGTON AVE	E WASHINGTON AVE	LONGFIBRE RD	Truck Route	Asphalt	45	653	163	3428	85	78	60	Mod	V Good	0	15	**82.2**
61170	WASHINGTON AVE	LONGFIBRE RD	CORPMAN LN	Truck Route	Asphalt	46	206	53	1106	89	99	60	Mod	Excellent	5	6	**91.4**
61160	WASHINGTON AVE	CORPMAN LN	DS@129W CORPMAN LN	Truck Route	Asphalt	45	129	32	677	83	100	60	Mod	Excellent	4	13	**87.8**
61150	WASHINGTON AVE	DS@129W CORPMAN LN	PRESSON PL	Truck Route	Asphalt	44	722	176	3706	88	99	60	Mod	Excellent	4	8	**90.8**
75060	WASHINGTON AVE	PRESSON PL	CITY LIMIT	Truck Route	Asphalt	45	319	80	1675	91	97	60	Mod	Excellent	4	5	**92**
61140	WASHINGTON AVE	CITY LIMIT	LANDON AVE	Truck Route	Asphalt	44	998	244	5123	82	96	60	Mod	Excellent	7	11	**85.9**
61120	WASHINGTON AVE	LANDON AVE	S 1ST AVE	Truck Route	Asphalt	45	329	82	1727	92	100	60	Mod	Excellent	0	8	**93.6**
70920	WASHINGTON AVE	S 1ST AVE	S 3RD AVE	Truck Route	Asphalt	46	675	173	3623	79	88	60	Mod	V Good	7	14	**80.8**
61100	WASHINGTON AVE	S 3RD AVE	DS@181W S 3RD AVE	Truck Route	Asphalt	52	181	52	1098	76	67	60	Mod	V Good	3	21	**72.5**
61110	WASHINGTON AVE	DS@181W S 3RD AVE	S 4TH AVE	Truck Route	Asphalt	45	197	49	1034	88	85	60	Mod	Excellent	4	8	**86.1**
61090	WASHINGTON AVE	S 4TH AVE	DS@277W S 4TH AVE	Truck Route	Asphalt	47	277	72	1519	82	97	60	Mod	Excellent	3	15	**86.2**
61070	WASHINGTON AVE	DS@277W S 4TH AVE	CORNELL AVE	Truck Route	Asphalt	47	671	175	3679	83	100	60	Mod	Excellent	3	14	**87.6**
61050	WASHINGTON AVE	CORNELL AVE	DS@165W CORNELL AVE	Truck Route	Asphalt	60	165	55	1155	87	90	60	Mod	Excellent	0	13	**87.3**
61030	WASHINGTON AVE	DS@165W CORNELL AVE	S 7TH AVE	Truck Route	Asphalt	50	168	47	980	85	92	60	Mod	Excellent	4	11	**86.5**
61020	WASHINGTON AVE	S 7TH AVE	S 8TH AVE	Truck Route	Asphalt	46	324	83	1739	82	100	60	Mod	Excellent	4	14	**87.4**
61010	WASHINGTON AVE	S 8TH AVE	S 9TH AVE	Truck Route	Asphalt	46	324	83	1739	86	91	60	Mod	Excellent	3	11	**86.7**
60990	WASHINGTON AVE	S 9TH AVE	S 10TH AVE	Truck Route	Asphalt	47	336	88	1842	79	83	60	Mod	V Good	4	18	**79.1**
60980	WASHINGTON AVE	S 10TH AVE	PLEASANT AVE	Truck Route	Asphalt	46	662	169	3553	80	94	60	Mod	V Good	8	12	**84.1**
60960	WASHINGTON AVE	PLEASANT AVE	QUEEN AVE	Truck Route	Asphalt	46	324	83	1739	83	92	60	Mod	Excellent	4	13	**85.5**
60940	WASHINGTON AVE	QUEEN AVE	S 12TH AVE	Truck Route	Asphalt	47	333	87	1826	81	86	60	Mod	V Good	8	12	**81.9**
60910	WASHINGTON AVE	S 12TH AVE	DS@349W S 12TH AVE	Truck Route	Asphalt	46	349	89	1873	83	97	60	Mod	Excellent	8	9	**87**
60890	WASHINGTON AVE	DS@349W S 12TH AVE	DS@603W S 12TH AVE	Truck Route	Asphalt	47	255	67	1398	81	100	60	Mod	Excellent	7	12	**86.4**
60880	WASHINGTON AVE	DS@603W S 12TH AVE	S 15TH AVE	Truck Route	Asphalt	46	353	90	1894	74	87	60	Mod	V Good	6	20	**77.6**
60870	WASHINGTON AVE	S 15TH AVE	S 16TH AVE	Truck Route	Asphalt	58	312	101	2111	69	73	60	Mod	V Good	8	23	**69.8**
60840	WASHINGTON AVE	S 16TH AVE	DS@310W S 16TH AVE	Truck Route	Asphalt	69	310	119	2496	64	77	60	Mod	Good	15	21	**67.6**
60850	WASHINGTON AVE	DS@310W S 16TH AVE	DS@611W S 16TH AVE	Truck Route	Asphalt	45	300	75	1575	57	79	60	Mod	Good	27	15	**63.5**
60820	WASHINGTON AVE	DS@611W S 16TH AVE	DS@914W S 16TH AVE	Truck Route	Asphalt	46	303	77	1626	53	65	60	Mod	Fair	29	18	**55.5**
60810	WASHINGTON AVE	DS@914W S 16TH AVE	DS@1199W S 16TH AVE	Truck Route	Asphalt	47	285	74	1563	58	90	30	Weak	Good	27	15	**67.6**
60800	WASHINGTON AVE	DS@1199W S 16TH AVE	DS@1582W S 16TH AVE	Truck Route	Asphalt	54	383	115	2413	42	75	60	Mod	Fair	36	22	**51.8**
60790	WASHINGTON AVE	DS@1582W S 16TH AVE	DS@1932W S 16TH AVE	Truck Route	Asphalt	54	350	105	2205	49	70	60	Mod	Fair	31	19	**54.9**
60780	WASHINGTON AVE	DS@1932W S 16TH AVE	AIRFAIR WY	Truck Route	Asphalt	53	142	42	878	67	84	60	Mod	V Good	11	21	**72.1**
60770	WASHINGTON AVE	AIRFAIR WY	S 24TH AVE	Truck Route	Asphalt	52	652	188	3955	46	74	60	Mod	Fair	29	23	**54.1**
60500	WASHINGTON AVE	S 24TH AVE	DS@454W S 24TH AVE	Truck Route	Asphalt	48	454	121	2542	49	71	60	Mod	Fair	21	24	**55.5**
60110	WASHINGTON AVE	DS@454W S 24TH AVE	DS@960W S 24TH AVE	Truck Route	Asphalt	45	506	127	2657	63	87	60	Mod	V Good	15	22	**70.2**
59700	WASHINGTON AVE	DS@960W S 24TH AVE	DS@1225W S 24TH AVE	Truck Route	Asphalt	46	265	68	1422	61	94	60	Mod	V Good	13	25	**71.5**
59600	WASHINGTON AVE	DS@1225W S 24TH AVE	S 28TH AVE	Truck Route	Asphalt	50	334	93	1948	60	92	60	Mod	V Good	19	20	**70**
59560	WASHINGTON AVE	S 28TH AVE	DS@178W S 28TH AVE	Truck Route	Asphalt	62	178	61	1288	75	87	60	Mod	V Good	3	21	**78.6**
59550	WASHINGTON AVE	DS@178W S 28TH AVE	DS@987W S 28TH AVE	Truck Route	Asphalt	62	809	279	5852	67	90	60	Mod	V Good	12	21	**73.9**
59430	WASHINGTON AVE	DS@987W S 28TH AVE	DS@1838W S 28TH AVE	Truck Route	Asphalt	61	851	288	6056	45	87	60	Mod	Fair	26	29	**57.7**
59300	WASHINGTON AVE	DS@1838W S 28TH AVE	S 36TH AVE	Truck Route	Asphalt	61	809	274	5757	65	90	60	Mod	V Good	17	18	**72.7**
58790	WASHINGTON AVE	S 36TH AVE	DS@491W S 36TH AVE	Truck Route	Asphalt	62	491	169	3552	67	94	60	Mod	V Good	15	18	**75.5**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
58620	WASHINGTON AVE	DS@491W S 36TH AVE	S 40TH AVE	Truck Route	Asphalt	62	902	311	6524	69	84	60	Mod	V Good	13	18	**73.1**
58310	WASHINGTON AVE	S 40TH AVE	S 42ND AVE	Truck Route	Asphalt	61	810	275	5765	72	90	60	Mod	V Good	7	20	**77.3**
57980	WASHINGTON AVE	S 42ND AVE	CREEKSIDE LP	Truck Route	Asphalt	63	698	244	5130	67	95	60	Mod	V Good	9	24	**75.4**
57260	WASHINGTON AVE	CREEKSIDE LP	S 48TH AVE	Truck Route	Asphalt	61	1043	353	7423	69	96	60	Mod	V Good	7	24	**77**
60210	WASHINGTON AVE	S 48TH AVE	SPRING CREEK RD	Truck Route	Asphalt	63	1913	670	14061	65	96	60	Mod	V Good	9	25	**74.6**
60660	WASHINGTON AVE	SPRING CREEK RD	S 52ND AVE	Truck Route	Asphalt	61	1226	415	8725	67	92	60	Mod	V Good	8	25	**74.8**
60670	WASHINGTON AVE	S 52ND AVE	DS@445W S 52ND AVE	Truck Route	Asphalt	64	445	158	3323	80	85	60	Mod	V Good	7	12	**81**
60650	WASHINGTON AVE	DS@445W S 52ND AVE	S 54TH AVE	Truck Route	Asphalt	62	399	137	2886	78	100	60	Mod	Excellent	0	22	**84.4**
60640	WASHINGTON AVE	S 54TH AVE	WELLINGTON DR	Truck Route	Asphalt	61	648	220	4612	80	95	60	Mod	Excellent	8	13	**84.3**
60630	WASHINGTON AVE	WELLINGTON DR	S 60TH AVE	Truck Route	Asphalt	61	1189	403	8462	83	100	60	Mod	Excellent	4	12	**88.1**
60620	WASHINGTON AVE	S 60TH AVE	S 64TH AVE	Truck Route	Asphalt	62	1352	466	9779	84	94	60	Mod	Excellent	7	9	**86.2**
60610	WASHINGTON AVE	S 64TH AVE	S 66TH AVE	Truck Route	Asphalt	61	938	318	6675	83	93	60	Mod	Excellent	4	14	**85.6**
60590	WASHINGTON AVE	S 66TH AVE	DS@470W S 66TH AVE	Truck Route	Asphalt	49	470	128	2687	64	89	60	Mod	V Good	8	27	**71.7**
60570	WASHINGTON AVE	DS@470W S 66TH AVE	S 70TH AVE	Truck Route	Asphalt	47	493	129	2703	75	100	60	Mod	V Good	5	20	**82.7**
60560	WASHINGTON AVE	S 70TH AVE	S 72ND AVE	Truck Route	Asphalt	46	725	185	3891	72	87	60	Mod	V Good	8	20	**76.3**
60530	WASHINGTON AVE	S 72ND AVE	S 73RD AVE	Local	Asphalt	46	285	73	1530	60	54	80	Strng	Fair	9	32	**56.9**
60540	WASHINGTON AVE	S 73RD AVE	S 74TH AVE	Local	Asphalt	28	417	65	1362	48	68	80	Strng	Fair	18	34	**53.8**
70960	WASHINGTON AVE	S 74TH AVE	S 76TH AVE	Local	Asphalt	27	902	135	2841	51	66	80	Strng	Fair	19	30	**54.9**
75420	WASHINGTON AVE	S 76TH AVE	S 78TH AVE	Local	Asphalt	27	524	79	1651	71	54	80	Strng	Good	4	26	**64.2**
71320	WASHINGTON AVE	S 78TH AVE	WEST END	Local	Asphalt	35	566	111	2323	60	52	80	Strng	Fair	9	31	**56.6**
42210	WEBSTER AVE	S 32ND AVE	DS@516W S 32ND AVE	Local	Asphalt	30	516	86	1806	46	50	60	Mod	Marginal	28	26	**46.1**
42190	WEBSTER AVE	DS@516W S 32ND AVE	S 34TH AVE	Local	Asphalt	30	150	25	525	57	59	80	Strng	Fair	13	30	**56.9**
41250	WEBSTER AVE	S 34TH AVE	S 35TH AVE	Local	Asphalt	29	328	53	1110	43	47	80	Strng	Marginal	22	35	**43.5**
41330	WEBSTER AVE	S 35TH AVE	S 36TH AVE	Local	Asphalt	28	330	51	1078	61	31	80	Strng	Fair	16	24	**49.7**
41340	WEBSTER AVE	S 38TH AVE	DS@339W S 38TH AVE	Local	Asphalt	29	339	55	1147	56	44	80	Strng	Fair	12	32	**50.9**
41380	WEBSTER AVE	DS@339W S 38TH AVE	S 40TH AVE	Local	Asphalt	35	335	65	1368	53	41	80	Strng	Marginal	18	29	**48.2**
41360	WEBSTER AVE	S 44TH AVE	S 45TH AVE	Local	Asphalt	29	323	52	1093	61	35	80	Strng	Fair	14	25	**51.2**
41450	WEBSTER AVE	S 45TH AVE	S 46TH AVE	Local	Asphalt	29	249	40	842	34	56	80	Strng	Marginal	31	36	**40.2**
42010	WEBSTER AVE	S 54TH AVE	LEANN PL	Local	Asphalt	29	270	44	914	60	38	80	Strng	Fair	8	32	**51.8**
41990	WEBSTER AVE	LEANN PL	S 56TH AVE	Local	Asphalt	28	280	44	915	57	57	80	Strng	Fair	13	30	**56.3**
42050	WEBSTER AVE	S 88TH AVE	S 87TH AVE	Local	Asphalt	27	384	58	1210	61	54	80	Strng	Fair	6	33	**57.7**
42450	WEBSTER AVE	S 89TH AVE	S 90TH AVE	Local	Asphalt	27	440	66	1386	73	72	60	Mod	V Good	9	19	**71.5**
42130	WEBSTER CT	S 53RD AVE	WEST END	Local	Asphalt	28	389	61	1271	36	28	80	Strng	Poor	34	30	**32.5**
61950	WELLINGTON DR	W WASHINGTON AVE	WHATCOM AVE	Local	Asphalt	35	794	154	3242	59	51	80	Strng	Fair	12	29	**55.8**
62190	WELLINGTON DR	WHATCOM AVE	W WHITMAN ST	Local	Asphalt	32	419	74	1564	60	60	80	Strng	Good	10	31	**59.1**
62430	WELLINGTON DR	W WHITMAN ST	SOUTH END	Local	Asphalt	33	117	21	450	71	70	60	Mod	V Good	5	25	**69.4**
31460	WEST WY	N 42ND AVE	DS@354W N 42ND AVE	Local	Asphalt	29	354	57	1198	43	38	80	Strng	Marginal	29	28	**40.5**
30790	WEST WY	DS@354W N 42ND AVE	WEST END	Local	Asphalt	39	89	19	408	51	32	80	Strng	Marginal	22	26	**43.8**
46260	WESTBROOK AVE	S 80TH AVE	S 83RD AVE	Local	Asphalt	27	779	117	2454	68	57	80	Strng	Good	8	24	**63.7**
74810	WESTBROOK AVE	S 83RD AVE	WEST END	Local	Asphalt	28	454	71	1483	78	62	60	Mod	V Good	7	15	**71.7**
47010	WESTBROOK AVE	EAST END	S 85TH AVE	Local	Asphalt	29	126	20	426	82	63	60	Mod	V Good	0	18	**74.4**
47050	WESTBROOK AVE	S 85TH AVE	S 88TH AVE	Local	Asphalt	27	1053	158	3317	56	64	60	Mod	Fair	16	27	**58**
47070	WESTBROOK AVE	S 88TH AVE	S 89TH AVE	Local	Asphalt	28	274	43	895	68	56	80	Strng	Good	4	29	**63**
50990	WESTBROOK CT	EAST END	WESTBROOK LP (W)	Local	Asphalt	46	136	34	723	64	50	80	Strng	Fair	10	26	**58.2**
49990	WESTBROOK LP (N)	S 75TH AVE	WESTBROOK LP (W)	Local	Asphalt	28	294	46	960	67	60	80	Strng	Good	8	25	**63.7**
51500	WESTBROOK LP (S)	S 75TH AVE	WESTBROOK LP (W)	Local	Asphalt	27	297	45	936	61	59	80	Strng	Good	9	31	**59.1**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
51000	WESTBROOK LP (W)	WESTBROOK LP (N)	WESTBROOK CT	Local	Asphalt	29	299	48	1012	64	69	80	Strng	Good	8	29	**64.5**
51460	WESTBROOK LP (W)	WESTBROOK CT	WESTBROOK LP (S)	Local	Asphalt	28	225	35	735	64	68	80	Strng	Good	5	31	**64.2**
46880	WESTBROOK PL	SOUTH END	DS@94N SOUTH END	Local	Asphalt	48	94	25	532	60	39	80	Strng	Fair	6	34	**52**
46060	WESTBROOK PL	DS@94N SOUTH END	S 76TH AVE	Local	Asphalt	31	253	44	915	62	53	80	Strng	Fair	7	31	**58**
46030	WESTBROOK PL	S 76TH AVE	DS@272W S 76TH AVE	Local	Asphalt	28	272	42	889	62	55	80	Strng	Fair	14	24	**58.8**
46040	WESTBROOK PL	DS@272W S 76TH AVE	S 79TH AVE	Local	Asphalt	29	267	43	903	52	52	80	Strng	Fair	19	29	**51.2**
33910	WESTOVER DR	W CHESTNUT AVE	CHISHOLM TL	Local	Asphalt	28	164	26	536	46	24	80	Strng	Poor	24	30	**38.1**
35840	WESTOVER DR	CHISHOLM TL	W WALNUT ST	Local	Asphalt	29	689	111	2331	55	38	80	Strng	Marginal	16	29	**48.5**
36700	WESTOVER DR	W WALNUT ST	SOUTH END	Local	Asphalt	31	235	41	858	56	42	80	Strng	Fair	13	31	**50.3**
70570	WESTPARK ST	N 40TH AVE	SUMMITVIEW AVE	Local	Asphalt	35	393	76	1605	72	49	80	Strng	Good	8	20	**63.2**
70680	WHATCOM AVE	S 54TH AVE	S 55TH AVE	Local	Asphalt	28	208	32	679	86	79	60	Mod	V Good	0	14	**83.1**
70610	WHATCOM AVE	S 55TH AVE	S 56TH AVE	Local	Asphalt	28	226	35	738	86	76	60	Mod	V Good	0	14	**82.1**
70620	WHATCOM AVE	S 56TH AVE	WELLINGTON DR	Local	Asphalt	27	226	34	712	69	45	80	Strng	Good	11	20	**60.4**
61960	WHATCOM AVE	WELLINGTON DR	S 57TH AVE	Local	Asphalt	28	276	43	902	59	58	80	Strng	Fair	11	30	**57.7**
61940	WHATCOM AVE	S 57TH AVE	S 58TH AVE	Local	Asphalt	27	270	41	851	65	70	80	Strng	Good	3	32	**65.7**
61930	WHATCOM AVE	S 58TH AVE	S 59TH AVE	Local	Asphalt	27	263	39	828	56	57	80	Strng	Fair	11	33	**55.5**
61920	WHATCOM AVE	S 59TH AVE	S 60TH AVE	Local	Asphalt	27	268	40	844	60	71	80	Strng	Good	9	31	**63**
61910	WHATCOM AVE	S 60TH AVE	S 60TH AVE	Local	Asphalt	28	114	18	372	58	43	80	Strng	Fair	18	24	**52.3**
76090	WHATCOM AVE	DS@183W S 76TH AVE	S 78TH AVE	Local	Asphalt	27	344	52	1084	94	82	60	Mod	Excellent	0	6	**89.4**
71310	WHATCOM AVE	S 76TH AVE	WEST END	Local	Asphalt	35	600	116	2439	90	70	60	Mod	V Good	4	6	**82.8**
70690	WHITMAN ST	S 54TH AVE	S 55TH AVE	Local	Asphalt	29	208	34	704	89	80	60	Mod	Excellent	0	11	**85.5**
70630	WHITMAN ST	S 55TH AVE	S 56TH AVE	Local	Asphalt	28	225	35	735	88	88	60	Mod	Excellent	0	12	**87.1**
70640	WHITMAN ST	S 56TH AVE	WELLINGTON DR	Local	Asphalt	27	226	34	712	71	69	80	Strng	V Good	1	28	**69.8**
62200	WHITMAN ST	WELLINGTON DR	S 57TH AVE	Local	Asphalt	27	270	41	851	59	52	80	Strng	Fair	6	35	**56**
75560	WHITMAN ST	S 57TH AVE	S 58TH AVE	Local	Asphalt	26	274	40	831	62	88	60	Mod	V Good	8	30	**69.8**
75580	WHITMAN ST	S 58TH AVE	S 59TH AVE	Local	Asphalt	27	121	18	381	69	86	80	Strng	V Good	0	31	**73.9**
75550	WHITMAN ST	S 59TH AVE	S 59TH AVE	Local	Asphalt	27	146	22	460	69	84	80	Strng	V Good	0	31	**73.1**
75540	WHITMAN ST	S 59TH AVE	S 60TH AVE	Local	Asphalt	27	269	40	847	79	61	80	Strng	V Good	2	19	**72.1**
62140	WHITMAN ST	UNKNOWN - 76110	S 76TH AVE	Local	Asphalt	28	277	43	905	87	68	60	Mod	V Good	1	13	**79.8**
71490	WHITMAN ST	S 76TH AVE	WEST END	Local	Asphalt	36	166	33	695	91	75	60	Mod	Excellent	0	9	**85.2**
55060	WILLOW CT	S 72ND AVE	WEST END	Local	Asphalt	20	230	26	537	64	35	80	Strng	Fair	16	21	**52.9**
9880	WILLOW ST	N 3RD AVE	DS@212W N 3RD AVE	Local	Asphalt	22	212	26	544	73	51	60	Mod	Good	13	14	**64.2**
9910	WILLOW ST	DS@212W N 3RD AVE	N 4TH AVE	Local	Asphalt	20	225	25	525	71	48	80	Strng	Good	8	21	**62.7**
9970	WILLOW ST	N 4TH AVE	DS@160W N 4TH AVE	Local	Asphalt	21	160	19	392	80	61	80	Strng	V Good	0	20	**72.7**
9980	WILLOW ST	DS@160W N 4TH AVE	N 5TH AVE	Local	Asphalt	21	170	20	417	83	64	60	Mod	V Good	0	17	**75.5**
10000	WILLOW ST	N 5TH AVE	DS@179W N 5TH AVE	Local	Asphalt	20	179	20	418	75	55	80	Strng	Good	5	20	**67.8**
9960	WILLOW ST	DS@179W N 5TH AVE	N 6TH AVE	Local	Asphalt	22	161	20	413	82	67	60	Mod	V Good	0	18	**76.3**
9500	WILLOW ST	N 6TH AVE	DS@651W N 6TH AVE	Local	Asphalt	48	651	174	3646	43	44	60	Mod	Marginal	33	23	**42.3**
9480	WILLOW ST	DS@651W N 6TH AVE	CAMPBELL LN	Local	Asphalt	47	52	14	285	41	50	60	Mod	Marginal	34	25	**42.6**
9510	WILLOW ST	CAMPBELL LN	DS@283W CAMPBELL LN	Local	Asphalt	49	283	77	1618	45	40	60	Mod	Marginal	32	23	**42**
9570	WILLOW ST	DS@283W CAMPBELL LN	N 9TH AVE	Local	Asphalt	49	172	47	983	43	56	60	Mod	Marginal	37	20	**45.8**
9590	WILLOW ST	N 9TH AVE	DS@162W N 9TH AVE	Local	Asphalt	48	162	43	907	57	49	60	Mod	Fair	24	19	**53.2**
9600	WILLOW ST	DS@162W N 9TH AVE	N 10TH AVE	Local	Asphalt	22	163	20	418	69	45	80	Strng	Good	0	31	**59.9**
9630	WILLOW ST	N 10TH AVE	N 11TH AVE	Local	Asphalt	20	195	22	455	60	47	80	Strng	Fair	12	28	**54.6**
9650	WILLOW ST	N 11TH AVE	N 14TH AVE	Local	Asphalt	23	294	38	789	66	55	80	Strng	Good	2	32	**61.2**
9620	WILLOW ST	N 14TH AVE	N 15TH AVE	Local	Asphalt	21	333	39	816	69	58	80	Strng	Good	4	27	**64.5**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
9850	WILLOW ST	N 16TH AVE	DS@353W N 16TH AVE	Local	Asphalt	31	353	61	1277	69	44	60	Mod	Good	15	16	**59.3**
9800	WILLOW ST	DS@353W N 16TH AVE	N 18TH AVE	Local	Asphalt	30	317	53	1110	81	62	80	Strng	V Good	0	19	**73.5**
9720	WILLOW ST	N 18TH AVE	N 19TH AVE	Local	Asphalt	22	329	40	844	71	48	80	Strng	Good	11	18	**62.7**
9730	WILLOW ST	N 19TH AVE	N 20TH AVE	Local	Asphalt	20	329	37	768	67	45	80	Strng	Fair	12	17	**58.8**
9750	WILLOW ST	N 20TH AVE	DS@535W N 20TH AVE	Local	Asphalt	21	535	62	1311	76	56	80	Strng	Good	4	20	**69.1**
9700	WILLOW ST	DS@535W N 20TH AVE	DS@928W N 20TH AVE	Local	Asphalt	34	393	74	1559	75	57	80	Strng	Good	3	22	**68.2**
9770	WILLOW ST	DS@928W N 20TH AVE	N 24TH AVE	Local	Asphalt	28	405	63	1323	68	66	60	Mod	Good	11	21	**66.6**
9790	WILLOW ST	N 24TH AVE	N 25TH AVE	Local	Asphalt	28	328	51	1071	59	46	80	Strng	Fair	20	22	**53.2**
9810	WILLOW ST	N 25TH AVE	N 26TH AVE	Local	Asphalt	27	329	49	1036	71	48	80	Strng	Good	6	23	**62.7**
9830	WILLOW ST	N 26TH AVE	N 27TH AVE	Local	Asphalt	27	268	40	844	69	52	60	Mod	Good	15	17	**62**
9690	WILLOW ST	N 27TH AVE	DS@189W N 27TH AVE	Local	Asphalt	28	189	29	617	83	64	60	Mod	V Good	4	13	**75.9**
9670	WILLOW ST	DS@189W N 27TH AVE	N 28TH AVE	Local	Asphalt	30	178	30	623	77	67	60	Mod	V Good	13	9	**73.1**
50960	WILSON LN	S 6TH ST	S 7TH ST	Local	Asphalt	20	480	53	1120	58	49	80	Strng	Fair	9	32	**54.3**
50980	WILSON LN	S 7TH ST	S 8TH ST	Local	Asphalt	25	294	41	858	63	60	80	Strng	Good	4	34	**60.9**
51010	WILSON LN	S 8TH ST	DS@462E S 8TH ST	Truck Route	Asphalt	20	462	51	1078	67	61	80	Strng	Good	5	28	**64.5**
51030	WILSON LN	DS@462E S 8TH ST	S FAIR AVE	Truck Route	Asphalt	28	346	54	1130	66	56	80	Strng	Good	4	30	**61.7**
57130	WOODLAND AVE	S 10TH AVE	PLEASANT AVE	Local	Asphalt	23	680	87	1825	80	64	60	Mod	V Good	11	10	**73.7**
33510	WOODWINDS WY	S 85TH PL	S 86TH PL	Local	Asphalt	28	466	72	1522	65	68	80	Strng	Good	0	35	**65**
33400	WOODWINDS WY	S 86TH PL	S 87TH PL	Local	Asphalt	28	265	41	866	65	77	80	Strng	Good	1	34	**68.2**
33410	WOODWINDS WY	S 87TH PL	S 88TH AVE	Local	Asphalt	35	305	59	1245	48	44	80	Strng	Marginal	19	33	**45.6**
76250	WOOLSEY LN	EAST END	WOOLSEY RD	Other	Asphalt	24	86	11	241	98	89	60	Mod	Excellent	0	2	**94.5**
76240	WOOLSEY LN	WOOLSEY RD	S 66TH AVE	Other	Asphalt	23	147	19	394	98	89	60	Mod	Excellent	0	2	**94.2**
76230	WOOSLEY RD	WOOSLEY RD	WOOLSEY LN	Other	Asphalt	24	1026	137	2873	86	67	60	Mod	V Good	9	5	**78.8**
76260	WOOSLEY RD	S 63RD LN	S 64TH AVE	Other	Asphalt	27	179	27	564	91	73	60	Mod	V Good	0	9	**84.3**
21300	WYMAN DR	W LINCOLN AVE	SE END	Local	Asphalt	10	216	12	252	58	33	80	Strng	Marginal	17	25	**48.8**
69840	YAKIMA AVE	N FAIR AVE	I 82 RAMP EB	Truck Route	Asphalt	82	141	64	1349	82	65	60	Mod	V Good	4	14	**75.4**
69880	YAKIMA AVE	I 82 RAMP EB	I 82 RAMP WB	Truck Route	Asphalt	67	743	277	5808	87	78	60	Mod	V Good	6	7	**83.1**
17430	YAKIMA AVE	I 82 RAMP WB	I 82 RAMP WB	Truck Route	Asphalt	93	307	159	3331	67	82	30	Weak	V Good	23	10	**71.3**
17480	YAKIMA AVE	I 82 RAMP WB	S 17TH ST	Truck Route	Asphalt	75	656	273	5740	38	78	60	Mod	Fair	37	26	**50**
17470	YAKIMA AVE	S 17TH ST	S 18TH ST	Truck Route	Asphalt	62	298	103	2156	67	75	60	Mod	Good	11	22	**68.5**
75350	YAKIMA AVE	S 18TH ST	S 18TH ST	Truck Route	Asphalt	60	130	43	910	41	67	60	Mod	Marginal	35	24	**48.2**
17550	YAKIMA AVE	S 18TH ST	S 18TH ST	Truck Route	Asphalt	60	216	72	1512	31	64	60	Mod	Marginal	43	26	**40.8**
17580	YAKIMA AVE	S 18TH ST	TERRACE HGTS DR	Truck Route	Asphalt	53	283	83	1750	43	65	60	Mod	Fair	35	22	**49.1**
17970	YAKIMA AVE	N 8TH ST	DS@181E N 8TH ST	Principal Arterial	Asphalt	68	181	68	1436	58	65	60	Mod	Good	24	18	**58.2**
17720	YAKIMA AVE	DS@181E N 8TH ST	N 9TH ST	Principal Arterial	Asphalt	68	192	73	1523	53	63	60	Mod	Fair	24	23	**54.9**
17590	YAKIMA AVE	N 9TH ST	I 82 RAMP WB	Truck Route	Asphalt	74	741	305	6397	54	78	60	Mod	Good	25	21	**60.9**
69930	YAKIMA AVE	I 82 RAMP WB	FAIR AV LP	Truck Route	Asphalt	69	570	219	4589	86	97	60	Mod	Excellent	0	14	**88.9**
69860	YAKIMA AVE	FAIR AV LP	N FAIR AVE	Truck Route	Asphalt	90	321	161	3371	84	100	60	Mod	Excellent	0	16	**88.4**
19170	YAKIMA AVE	N 6TH ST	DS@205E N 6TH ST	Principal Arterial	Asphalt	67	205	76	1602	51	71	60	Mod	Fair	26	22	**56**
19060	YAKIMA AVE	DS@205E N 6TH ST	S 7TH ST	Principal Arterial	Asphalt	67	184	68	1438	42	78	60	Mod	Fair	32	26	**52.3**
18870	YAKIMA AVE	S 7TH ST	DS@196E S 7TH ST	Principal Arterial	Asphalt	67	196	73	1532	47	72	60	Mod	Fair	26	27	**53.2**
18450	YAKIMA AVE	DS@196E S 7TH ST	N 8TH ST	Principal Arterial	Asphalt	67	191	71	1493	50	63	60	Mod	Fair	27	23	**52.3**
22230	YAKIMA AVE	N 1ST ST	S 2ND ST	Principal Arterial	Asphalt	66	386	142	2972	50	62	60	Mod	Fair	35	15	**52.3**
21740	YAKIMA AVE	S 2ND ST	N 3RD ST	Principal Arterial	Asphalt	67	412	153	3220	45	67	60	Mod	Fair	38	16	**50.6**
21200	YAKIMA AVE	N 3RD ST	S 4TH ST	Principal Arterial	Asphalt	67	396	147	3095	47	62	60	Mod	Fair	37	16	**50**
20900	YAKIMA AVE	S 4TH ST	N NACHES AVE	Principal Arterial	Asphalt	60	427	142	2989	41	53	60	Mod	Marginal	37	22	**43.5**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
19890	YAKIMA AVE	N NACHES AVE	DS@223E N NACHES AVE	Principal Arterial	Asphalt	67	223	83	1743	44	61	60	Mod	Marginal	32	25	**47.6**
19490	YAKIMA AVE	DS@223E N NACHES AVE	N 6TH ST	Principal Arterial	Asphalt	67	195	73	1524	55	66	60	Mod	Fair	30	15	**56.9**
22660	YAKIMA AVE	N FRONT ST	N 1ST ST	Principal Arterial	Asphalt	68	387	146	3070	55	64	60	Mod	Fair	28	17	**56.3**
22860	YAKIMA AVE	E YAKIMA AVE	DS@240W E YAKIMA AVE	Principal Arterial	Asphalt	66	240	88	1848	62	68	60	Mod	Good	22	16	**62.5**
23470	YAKIMA AVE	DS@240W E YAKIMA AVE	N 1ST AVE	Principal Arterial	Asphalt	65	310	112	2351	47	62	60	Mod	Fair	32	21	**50.3**
23850	YAKIMA AVE	N 1ST AVE	N 2ND AVE	Principal Arterial	Asphalt	64	383	136	2860	39	64	60	Mod	Marginal	41	20	**45.3**
24270	YAKIMA AVE	N 2ND AVE	N 3RD AVE	Principal Arterial	Asphalt	64	400	142	2987	39	67	60	Mod	Marginal	41	20	**46.1**
24690	YAKIMA AVE	N 3RD AVE	N 4TH AVE	Principal Arterial	Asphalt	58	401	129	2713	56	70	60	Mod	Good	25	19	**59.3**
25530	YAKIMA AVE	N 4TH AVE	S 5TH AVE	Principal Arterial	Asphalt	64	400	142	2987	46	70	60	Mod	Fair	30	20	**52.3**
26650	YAKIMA AVE	S 5TH AVE	N 6TH AVE	Principal Arterial	Asphalt	63	399	140	2933	51	65	60	Mod	Fair	30	19	**53.8**
27170	YAKIMA AVE	N 6TH AVE	S 7TH AVE	Principal Arterial	Asphalt	63	393	138	2889	53	63	60	Mod	Fair	27	20	**54.3**
27780	YAKIMA AVE	S 7TH AVE	N 8TH AVE	Minor Arterial	Asphalt	63	378	132	2778	69	72	60	Mod	V Good	12	19	**68.9**
28150	YAKIMA AVE	N 8TH AVE	DS@189W N 8TH AVE	Minor Arterial	Asphalt	65	189	68	1433	67	79	60	Mod	V Good	8	25	**69.8**
28310	YAKIMA AVE	DS@189W N 8TH AVE	N 9TH AVE	Minor Arterial	Asphalt	63	185	65	1360	71	82	60	Mod	V Good	6	23	**73.9**
28670	YAKIMA AVE	N 9TH AVE	DS@194W N 9TH AVE	Minor Arterial	Asphalt	64	194	69	1449	69	84	60	Mod	V Good	8	23	**73.1**
28900	YAKIMA AVE	DS@194W N 9TH AVE	N 10TH AVE	Minor Arterial	Asphalt	65	194	70	1471	66	74	60	Mod	Good	8	27	**67.6**
29170	YAKIMA AVE	N 10TH AVE	DS@189W N 10TH AVE	Minor Arterial	Asphalt	66	189	69	1455	62	68	60	Mod	Good	19	19	**62.2**
29610	YAKIMA AVE	DS@189W N 10TH AVE	S 11TH AVE	Minor Arterial	Asphalt	64	186	66	1389	52	66	60	Mod	Fair	33	15	**55.2**
29990	YAKIMA AVE	S 11TH AVE	DS@191W S 11TH AVE	Minor Arterial	Asphalt	65	191	69	1448	64	62	60	Mod	Good	23	13	**61.7**
70070	YAKIMA AVE	DS@191W S 11TH AVE	S 12TH AVE	Minor Arterial	Asphalt	56	82	26	536	77	57	60	Mod	V Good	11	12	**68.9**
70060	YAKIMA AVE	S 12TH AVE	HALL AVE	Minor Arterial	Asphalt	50	225	63	1313	88	80	60	Mod	Excellent	0	12	**84.6**
70120	YAKIMA AVE	HALL AVE	S 14TH AVE	Minor Arterial	Asphalt	48	241	64	1350	83	82	60	Mod	V Good	6	12	**81.9**
70110	YAKIMA AVE	S 14TH AVE	CHICAGO AVE	Minor Arterial	Asphalt	56	107	33	699	85	81	60	Mod	V Good	6	10	**82.5**
30820	YAKIMA AVE	CHICAGO AVE	DS@157W CHICAGO AVE	Minor Arterial	Asphalt	43	157	38	788	96	87	60	Mod	Excellent	0	4	**92.1**
30830	YAKIMA AVE	DS@157W CHICAGO AVE	S 15TH AVE	Minor Arterial	Asphalt	42	163	38	799	90	77	60	Mod	Excellent	0	10	**84.4**
30840	YAKIMA AVE	S 15TH AVE	N 16TH AVE	Minor Arterial	Asphalt	41	421	96	2014	86	68	60	Mod	V Good	5	9	**79.3**
31130	YAKIMA AVE	N 16TH AVE	DS@324W N 16TH AVE	Local	Asphalt	22	324	40	832	53	51	80	Strng	Fair	20	27	**51.5**
31140	YAKIMA AVE	DS@324W N 16TH AVE	PARK AVE	Local	Asphalt	22	163	20	418	23	34	80	Strng	Poor	46	31	**25.6**
31160	YAKIMA AVE	PARK AVE	S 18TH AVE	Local	Asphalt	23	239	31	641	20	45	60	Mod	Poor	47	33	**27**
31170	YAKIMA AVE	S 18TH AVE	S 19TH AVE	Local	Asphalt	22	290	35	744	17	52	60	Mod	Poor	52	31	**27.8**
31120	YAKIMA AVE	S 19TH AVE	DS@310W S 19TH AVE	Local	Asphalt	23	310	40	832	20	55	60	Mod	Poor	49	31	**30.8**
31080	YAKIMA AVE	DS@310W S 19TH AVE	GILBERT DR	Local	Concrete	26	146	21	443	62	43	60	Mod	Fair	0	0	**55.2**
31250	YAKIMA AVE	GILBERT DR	N 22ND AVE	Local	Concrete	28	517	80	1689	36	42	60	Mod	Poor	0	0	**37.5**
31270	YAKIMA AVE	N 22ND AVE	N 23RD AVE	Local	Concrete	28	330	51	1078	35	35	60	Mod	Poor	0	0	**34.2**
31240	YAKIMA AVE	N 23RD AVE	N 24TH AVE	Local	Concrete	27	333	50	1049	37	42	60	Mod	Poor	0	0	**38.1**
31200	YAKIMA AVE	N 24TH AVE	DS@311W N 24TH AVE	Local	Concrete	27	311	47	980	40	38	60	Mod	Poor	0	0	**38.7**
31150	YAKIMA AVE	DS@311W N 24TH AVE	N 26TH AVE	Local	Concrete	28	345	54	1127	66	49	60	Mod	Good	0	0	**59.3**
31010	YAKIMA AVE	N 26TH AVE	DS@303W N 26TH AVE	Local	Concrete	28	303	47	990	62	42	60	Mod	Fair	0	0	**54.6**
30970	YAKIMA AVE	DS@303W N 26TH AVE	N 28TH AVE	Local	Concrete	26	341	49	1034	62	39	60	Mod	Fair	0	0	**53.2**
30960	YAKIMA AVE	N 28TH AVE	DS@327W N 28TH AVE	Local	Concrete	27	327	49	1030	73	51	60	Mod	Good	0	0	**64.7**
30870	YAKIMA AVE	DS@327W N 28TH AVE	N 30TH AVE	Local	Concrete	27	349	52	1099	58	47	60	Mod	Fair	0	0	**53.8**
30860	YAKIMA AVE	N 30TH AVE	DS@291W N 30TH AVE	Local	Concrete	27	291	44	917	34	38	60	Mod	Poor	0	0	**34.8**
30750	YAKIMA AVE	DS@291W N 30TH AVE	N 32ND AVE	Local	Concrete	26	368	53	1116	64	41	60	Mod	Fair	0	0	**55.8**
30730	YAKIMA AVE	N 32ND AVE	DS@418W N 32ND AVE	Local	Concrete	27	418	63	1317	49	44	60	Mod	Marginal	0	0	**46.4**
30760	YAKIMA AVE	DS@418W N 32ND AVE	N 34TH AVE	Local	Concrete	27	243	36	765	55	50	60	Mod	Fair	0	0	**52.6**
30780	YAKIMA AVE	N 34TH AVE	N 36TH AVE	Local	Concrete	28	658	102	2149	57	50	60	Mod	Fair	0	0	**53.8**

City of Yakima, WA

Street Inventory and Condition Summary - Sorted by Street Name



GISID	On Street	From Street	To Street	FunCL	Pavetype	Pavement Width (ft)	Pavement Length (ft)	Add Area (yd2)	Pavement Area (yd2)	Condition Summary: Surface Distress Index (SDI)	Roughness Index (RI)	Structural Index (SI)	Strength Rating	Condition Rating	Load Assoc Distress Deducts (LADD)	Non-Load Distress Deducts (NLAD)	Current Segment PCI (CPCI)
30990	YAKIMA AVE	S 61ST AVE	S 62ND AVE	Local	Asphalt	29	337	54	1140	72	50	80	Strng	Good	3	24	**64**
74800	YAKIMA AVE	N 65TH AVE	WEST END	Local	Asphalt	39	258	56	1167	69	44	80	Strng	Good	4	27	**59.6**
71440	YAKIMA AVE	EAST END	N 67TH AVE	Local	Asphalt	27	276	41	869	70	47	80	Strng	Good	12	18	**61.4**
30680	YAKIMA AVE	N 68TH AVE	DS@295W N 68TH AVE	Local	Asphalt	22	295	36	757	41	65	80	Strng	Marginal	20	30	**48.2**
30690	YAKIMA AVE	DS@295W N 68TH AVE	DS@605W N 68TH AVE	Local	Asphalt	26	311	45	943	94	83	60	Mod	Excellent	0	6	**89.4**
70950	YAKIMA AVE	DS@605W N 68TH AVE	N 70TH AVE	Local	Asphalt	27	233	35	734	90	70	60	Mod	V Good	3	7	**82.8**
31020	YAKIMA AVE	N 73RD AVE	N 74TH AVE	Local	Asphalt	29	362	58	1225	64	53	80	Strng	Good	8	28	**59.1**
30210	YAKIMA AVE	EAST END	N 77TH AVE	Local	Asphalt	37	227	47	991	56	47	80	Strng	Fair	13	31	**51.8**
30230	YAKIMA AVE	N 88TH AVE	DS@645W N 88TH AVE	Local	Asphalt	28	645	100	2107	73	65	80	Strng	V Good	4	22	**70**
30240	YAKIMA AVE	DS@645W N 88TH AVE	N 90TH AVE	Local	Asphalt	29	175	28	592	82	64	60	Mod	V Good	4	14	**75.2**
30570	YAKIMA AVE	N 91ST AVE	N 92ND AVE	Local	Asphalt	30	252	42	882	66	47	80	Strng	Fair	13	22	**58.5**
30540	YAKIMA AVE	S 94TH AVE	N 95TH AVE	Local	Asphalt	27	371	56	1169	71	59	80	Strng	Good	8	22	**66.2**
30350	YAKIMA CT	N 92ND AVE	SW END	Local	Asphalt	43	109	26	552	60	40	80	Strng	Fair	5	35	**52.3**
58530	ZIER RD	S 72ND AVE	DS@340W S 72ND AVE	Major Collector	Asphalt	34	340	64	1349	73	55	60	Mod	Good	8	19	**66.2**
58490	ZIER RD	DS@340W S 72ND AVE	DS@651W S 72ND AVE	Major Collector	Asphalt	27	311	47	980	86	88	60	Mod	Excellent	8	6	**86.1**
58460	ZIER RD	DS@651W S 72ND AVE	CONOVER DR	Major Collector	Asphalt	25	204	28	595	67	77	60	Mod	V Good	16	16	**69.6**
58450	ZIER RD	CONOVER DR	DS@471W CONOVER DR	Major Collector	Asphalt	27	471	71	1484	62	58	60	Mod	Good	16	22	**59.3**
58430	ZIER RD	DS@471W CONOVER DR	DS@1150W CONOVER DR	Major Collector	Asphalt	27	679	102	2139	69	62	60	Mod	Good	11	21	**65.4**
58380	ZIER RD	DS@1150W CONOVER DR	S 80TH AVE	Major Collector	Asphalt	29	639	103	2162	77	85	60	Mod	V Good	9	13	**79**
58410	ZIER RD	S 80TH AVE	DS@1598W S 80TH AVE	Major Collector	Asphalt	23	1598	204	4288	81	89	60	Mod	V Good	7	12	**82.9**

Appendix B

$2.7M/Yr Rehabilitation Plan by Segment

IMS Easy Street Analysis

GISID	Block Number	Street Prefix	On Street	From Street	To Street	Project Current PCI	Year of First Rehab	Rehab Activity	Avg Unit Rate ($/yd2)	Segment Pavement Cost ($)	Segment Total Cost ($)	Whole Project Cost ($)	5 Year Post Rehab PCI
59280	10		STREIF RD	EAST END	S 72ND AVE	60	1	MicroSurface / Chip Seal + Strctrl Ptch	4.60	9,757	9,757	9,757	85
56970	10		ROCK AVE	W MEAD AVE	DS@253S W MEAD AVE	60	1	MicroSurface / Chip Seal + Strctrl Ptch	4.60	4,347	4,347	21,082	85
57870	20		ROCK AVE	DS@253S W MEAD AVE	W KING ST	60	1	MicroSurface / Chip Seal + Strctrl Ptch	4.60	7,112	7,112	21,082	85
59060	30		ROCK AVE	W KING ST	W PIERCE ST	60	1	MicroSurface / Chip Seal + Strctrl Ptch	4.60	9,623	9,623	21,082	85
31210	10	W	SPRUCE ST	S 2ND AVE	DS@195W S 2ND AVE	60	1	MicroSurface / Chip Seal + Strctrl Ptch	4.60	5,129	5,129	20,921	85
31380	20	W	SPRUCE ST	DS@195W S 2ND AVE	S 3RD AVE	60	1	MicroSurface / Chip Seal + Strctrl Ptch	4.60	5,203	5,203	20,921	85
31550	10	W	SPRUCE ST	S 3RD AVE	DS@198W S 3RD AVE	60	1	MicroSurface / Chip Seal + Strctrl Ptch	4.60	5,207	5,207	20,921	85
32110	20	W	SPRUCE ST	DS@198W S 3RD AVE	S 4TH AVE	60	1	MicroSurface / Chip Seal + Strctrl Ptch	4.60	5,382	5,382	20,921	85
40920	50		PEACH ST	S 5TH AVE	DS@163W S 5TH AVE	61	1	MicroSurface / Chip Seal + Strctrl Ptch	4.60	2,098	2,098	8,482	85
40930	60		PEACH ST	DS@163W S 5TH AVE	S 6TH AVE	61	1	MicroSurface / Chip Seal + Strctrl Ptch	4.6	2226	2226	8482	85
40940	70		PEACH ST	S 6TH AVE	DS@165W S 6TH AVE	61	1	MicroSurface / Chip Seal + Strctrl Ptch	4.60	2,125	2,125	8,482	85
40900	80		PEACH ST	DS@165W S 6TH AVE	CORNELL AVE	61	1	MicroSurface / Chip Seal + Strctrl Ptch	4.60	2,033	2,033	8,482	85
54060	10	S	29TH AVE	LILA AVE	W LOGAN AVE	60	1	MicroSurface / Chip Seal + Strctrl Ptch	4.6	4655	4655	36776	85
54230	20	S	29TH AVE	W LOGAN AVE	W LOGAN AVE	60	1	MicroSurface / Chip Seal + Strctrl Ptch	4.60	1,835	1,835	36,776	85
54260	10	S	30TH AVE	NORTH END	W LOGAN AVE	60	1	MicroSurface / Chip Seal + Strctrl Ptch	4.60	3,786	3,786	36,776	85
54220	10	S	31ST AVE	LILA AVE	W LOGAN AVE	60	1	MicroSurface / Chip Seal + Strctrl Ptch	4.60	6,684	6,684	36,776	85
53520	10		LILA AVE	S 29TH AVE	DS@198W S 29TH AVE	60	1	MicroSurface / Chip Seal + Strctrl Ptch	4.60	3,399	3,399	36,776	85
53480	20		LILA AVE	DS@198W S 29TH AVE	S 31ST AVE	60	1	MicroSurface / Chip Seal + Strctrl Ptch	4.6	5101	5101	36776	85
53410	30		LILA AVE	S 31ST AVE	S 32ND AVE	60	1	MicroSurface / Chip Seal + Strctrl Ptch	4.60	4,379	4,379	36,776	85
54250	10	W	LOGAN AVE	S 29TH AVE	S 30TH AVE	60	1	MicroSurface / Chip Seal + Strctrl Ptch	4.60	3,418	3,418	36,776	85
54270	20	W	LOGAN AVE	S 30TH AVE	S 31ST AVE	60	1	MicroSurface / Chip Seal + Strctrl Ptch	4.60	3,519	3,519	36,776	85
20140	10	N	32ND AVE	W LINCOLN AVE	DS@162N W LINCOLN AVE	73	1	MicroSurface / Chip Seal	3.3	1620	1620	11048	84
19200	20	N	32ND AVE	DS@162N W LINCOLN AVE	DS@399N W LINCOLN AVE	73	1	MicroSurface / Chip Seal	3.30	2,109	2,109	11,048	84
18070	30	N	32ND AVE	DS@399N W LINCOLN AVE	PONDEROSA PL	73	1	MicroSurface / Chip Seal	3.3	3072	3072	11048	83
14950	60	N	32ND AVE	DITTER DR	ENGLEWOOD AVE	73	1	MicroSurface / Chip Seal	3.30	1,439	1,439	11,048	84
27780	10	W	YAKIMA AVE	S 7TH AVE	N 8TH AVE	71	1	MicroSurface / Chip Seal	3.3	9167	9167	23166	83
28150	20	W	YAKIMA AVE	N 8TH AVE	DS@189W N 8TH AVE	71	1	MicroSurface / Chip Seal	3.3	4729	4729	23166	83
28310	30	W	YAKIMA AVE	DS@189W N 8TH AVE	N 9TH AVE	71	1	MicroSurface / Chip Seal	3.3	4488	4488	23166	83
28670	40	W	YAKIMA AVE	N 9TH AVE	DS@194W N 9TH AVE	71	1	MicroSurface / Chip Seal	3.3	4782	4782	23166	83
28160	10	S	7TH AVE	W YAKIMA AVE	DS@193S W YAKIMA AVE	71	1	MicroSurface / Chip Seal	3.30	2,303	2,303	11,414	83
29450	20	S	7TH AVE	DS@193S W YAKIMA AVE	W CHESTNUT AVE	71	1	MicroSurface / Chip Seal	3.3	3567	3567	11414	83
31500	30	S	7TH AVE	W CHESTNUT AVE	W WALNUT ST	71	1	MicroSurface / Chip Seal	3.3	5544	5544	11414	83
38330	240		TIETON DR	S 30TH AVE	S 31ST AVE	72	1	MicroSurface / Chip Seal	3.3	5303	5303	52500	83
38240	250		TIETON DR	S 31ST AVE	S 32ND AVE	72	1	MicroSurface / Chip Seal	3.3	5240	5240	52500	83
38200	260		TIETON DR	S 32ND AVE	VOLTAIRE AVE	72	1	MicroSurface / Chip Seal	3.3	5132	5132	52500	83
38210	270		TIETON DR	VOLTAIRE AVE	S 34TH AVE	72	1	MicroSurface / Chip Seal	3.3	5320	5320	52500	83
38250	280		TIETON DR	S 34TH AVE	S 35TH AVE	72	1	MicroSurface / Chip Seal	3.3	5115	5115	52500	83
38300	290		TIETON DR	S 35TH AVE	S 36TH AVE	72	1	MicroSurface / Chip Seal	3.3	5224	5224	52500	83
38350	300		TIETON DR	S 36TH AVE	S 37TH AVE	72	1	MicroSurface / Chip Seal	3.3	7844	7844	52500	83
38380	310		TIETON DR	S 37TH AVE	S 38TH AVE	72	1	MicroSurface / Chip Seal	3.3	2587	2587	52500	83
38400	320		TIETON DR	S 38TH AVE	DS@335W S 38TH AVE	72	1	MicroSurface / Chip Seal	3.3	5287	5287	52500	83

IMS Easy Street Analysis

GISID	Block Number	Street Prefix	On Street	From Street	To Street	Project Current PCI	Year of First Rehab	Rehab Activity	Avg Unit Rate ($/yd2)	Segment Pavement Cost ($)	Segment Total Cost ($)	Whole Project Cost ($)	5 Year Post Rehab PCI
38480	330		TIETON DR	DS@335W S 38TH AVE	S 40TH AVE	72	1	MicroSurface / Chip Seal	3.3	5448	5448	52500	83
56540	10	E	MEAD AVE	W MEAD AVE	MARYLAND ST	73	1	MicroSurface / Chip Seal	3.3	16467	16467	71369	83
56480	10	W	MEAD AVE	E MEAD AVE	PRESSON LN	73	1	MicroSurface / Chip Seal	3.3	15401	15401	71369	83
56460	20	W	MEAD AVE	PRESSON LN	VOELKER AVE	73	1	MicroSurface / Chip Seal	3.3	4227	4227	71369	83
56440	30	W	MEAD AVE	VOELKER AVE	DS@166W VOELKER AVE	73	1	MicroSurface / Chip Seal	3.3	2878	2878	71369	83
56410	40	W	MEAD AVE	DS@166W VOELKER AVE	LEDWICH AVE	73	1	MicroSurface / Chip Seal	3.3	3119	3119	71369	83
56430	50	W	MEAD AVE	LEDWICH AVE	ROCK AVE	73	1	MicroSurface / Chip Seal	3.3	5666	5666	71369	83
56400	60	W	MEAD AVE	ROCK AVE	LANDON AVE	73	1	MicroSurface / Chip Seal	3.3	5590	5590	71369	83
56380	70	W	MEAD AVE	LANDON AVE	S 1ST AVE	73	1	MicroSurface / Chip Seal	3.3	5844	5844	71369	83
56360	80	W	MEAD AVE	S 1ST AVE	S 2ND AVE	73	1	MicroSurface / Chip Seal	3.3	5805	5805	71369	83
56340	90	W	MEAD AVE	S 2ND AVE	S 3RD AVE	73	1	MicroSurface / Chip Seal	3.30	6,372	6,372	71,369	84
31430	90	S	FAIR AVE	E BEECH ST	S 10TH ST	72	1	MicroSurface / Chip Seal + Strctrl Ptch	4.1	6138	6138	34214	83
31870	100	S	FAIR AVE	S 10TH ST	HIGH ST	72	1	MicroSurface / Chip Seal + Strctrl Ptch	4.10	996	996	34,214	83
33710	110	S	FAIR AVE	HIGH ST	E RACE ST	72	1	MicroSurface / Chip Seal + Strctrl Ptch	4.1	4162	4162	34214	83
34780	120	S	FAIR AVE	E RACE ST	E ALDER ST	72	1	MicroSurface / Chip Seal + Strctrl Ptch	4.1	5141	5141	34214	83
37110	130	S	FAIR AVE	E ALDER ST	E ADAMS ST	72	1	MicroSurface / Chip Seal + Strctrl Ptch	4.1	8130	8130	34214	83
39750	140	S	FAIR AVE	E ADAMS ST	PACIFIC AVE	72	1	MicroSurface / Chip Seal + Strctrl Ptch	4.1	9647	9647	34214	83
61200	10	E	WASHINGTON AVE	S 1ST ST	DS@228E S 1ST ST	72	1	MicroSurface / Chip Seal	3.30	5,092	5,092	22,390	84
61180	20	E	WASHINGTON AVE	DS@228E S 1ST ST	DS@372E S 1ST ST	72	1	MicroSurface / Chip Seal	3.3	2884	2884	22390	83
61260	30	E	WASHINGTON AVE	DS@372E S 1ST ST	S 14TH ST	72	1	MicroSurface / Chip Seal	3.3	14414	14414	22390	83
17820	5	N	1ST ST	E MARTIN LUTHER KING JR BLVD	E LINCOLN AVE	49	1	ACP Full Depth Reconstruction	0.01	36	36	122,072	94
16140	10	N	1ST ST	E LINCOLN AVE	E D ST	49	1	ACP Full Depth Reconstruction	0.01	35	35	122,072	94
13730	20	N	1ST ST	E D ST	E E ST	49	1	ACP Full Depth Reconstruction	0.01	36	36	122,072	94
12390	30	N	1ST ST	E E ST	E F ST	49	1	ACP Full Depth Reconstruction	0.01	35	35	122,072	94
10790	40	N	1ST ST	E F ST	E G ST	49	1	ACP Full Depth Reconstruction	0.01	36	36	122,072	94
9270	50	N	1ST ST	E G ST	E H ST	49	1	ACP Full Depth Reconstruction	0.01	37	37	122,072	94
8160	60	N	1ST ST	E H ST	DS@270 S E I ST	49	1	ACP Full Depth Reconstruction	0.01	38	38	122,072	94
6840	70	N	1ST ST	DS@270 S E I ST	E I ST	49	1	ACP Full Depth Reconstruction	0.01	19	19	122,072	94
6190	80	N	1ST ST	E I ST	E J ST	49	1	ACP Full Depth Reconstruction	150.00	121,800	121,800	122,072	94
25990	10		SUMMITVIEW AVE	N 40TH AVE	WESTPARK ST	69	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45	66780	66780	667260	90
26000	20		SUMMITVIEW AVE	WESTPARK ST	DS@397W WESTPARK ST	69	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45.00	97,965	97,965	667,260	90
26010	30		SUMMITVIEW AVE	DS@397W WESTPARK ST	N 42ND AVE	69	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45.00	33,705	33,705	667,260	90
26030	40		SUMMITVIEW AVE	N 42ND AVE	N 44TH AVE	69	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45	127575	127575	667260	90
26140	50		SUMMITVIEW AVE	N 44TH AVE	N 45TH AVE	69	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45	88335	88335	667260	90
26150	60		SUMMITVIEW AVE	N 45TH AVE	N 46TH AVE	69	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45	81630	81630	667260	90
26100	70		SUMMITVIEW AVE	N 46TH AVE	RANCHO LN	69	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45	104580	104580	667260	90
26120	80		SUMMITVIEW AVE	RANCHO LN	N 48TH AVE	69	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45.00	66,690	66,690	667,260	90
25610	170		SUMMITVIEW AVE	N 56TH AVE	DS@529W N 56TH AVE	60	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45.00	144,405	144,405	1,448,640	90
25520	180		SUMMITVIEW AVE	DS@529W N 56TH AVE	DS@644W N 56TH AVE	60	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45.00	31,995	31,995	1,448,640	90
25510	190		SUMMITVIEW AVE	DS@644W N 56TH AVE	DS@985W N 56TH AVE	60	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45.00	95,175	95,175	1,448,640	90
25470	200		SUMMITVIEW AVE	DS@985W N 56TH AVE	N 60TH AVE	60	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45.00	94,725	94,725	1,448,640	90
25460	210		SUMMITVIEW AVE	N 60TH AVE	N SHAMROCK DR, E	60	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45.00	105,390	105,390	1,448,640	90

GISID	Block Number	Street Prefix	On Street	From Street	To Street	Project Current PCI	Year of First Rehab	Rehab Activity	Avg Unit Rate ($/yd2)	Segment Pavement Cost ($)	Segment Total Cost ($)	Whole Project Cost ($)	5 Year Post Rehab PCI
25450	220		SUMMITVIEW AVE	N SHAMROCK DR, E	N SHAMROCK DR, W	60	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45.00	68,805	68,805	1,448,640	90
25440	230		SUMMITVIEW AVE	N SHAMROCK DR, W	N 62ND AVE	60	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45.00	56,250	56,250	1,448,640	90
25430	240		SUMMITVIEW AVE	N 62ND AVE	N 63RD AVE	60	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45.00	90,360	90,360	1,448,640	90
25410	250		SUMMITVIEW AVE	N 63RD AVE	N 65TH AVE	60	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45.00	115,650	115,650	1,448,640	90
25390	260		SUMMITVIEW AVE	N 65TH AVE	N 66TH AVE	60	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45	101610	101610	1448640	90
25360	270		SUMMITVIEW AVE	N 66TH AVE	DS@78W N 66TH AVE	60	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45	21690	21690	1448640	90
25340	280		SUMMITVIEW AVE	DS@78W N 66TH AVE	N 67TH AVE	60	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45	100080	100080	1448640	90
25310	290		SUMMITVIEW AVE	N 67TH AVE	N 69TH AVE	60	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45.00	143,100	143,100	1,448,640	90
25320	300		SUMMITVIEW AVE	N 69TH AVE	N 70TH AVE	60	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45.00	21,690	21,690	1,448,640	90
26700	310		SUMMITVIEW AVE	N 70TH AVE	DS@627W N 70TH AVE	60	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45.00	167,895	167,895	1,448,640	90
26510	320		SUMMITVIEW AVE	DS@627W N 70TH AVE	N 72ND AVE	60	1	EM/FWM + Moderate Overlay (2.0 - 3.0)	45.00	89,820	89,820	1,448,640	90
59510	20	S	66TH AVE	TERRY AVE	PARSONS LP	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	4,931	4,931	39,176	85
60160	30	S	66TH AVE	PARSONS LP	FREMONT DR	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	10,481	10,481	39,176	85
60580	40	S	66TH AVE	FREMONT DR	W WASHINGTON AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	6,308	6,308	39,176	85
60170	10		PICKENS LP	S 66TH AVE	S 66TH AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	17,456	17,456	39,176	85
75470	60	S	85TH AVE	GARDEN AVE	SOUTH END	35	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	22,226	22,226	22,226	93
71370	10		VIEWCREST WY	ENGLEWOOD CREST DR	VIEWMONT DR	28	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	94,632	94,632	94,632	93
23830	10	N	73RD AVE	SADDLEBROOK DR	DS@388N SADDLEBROOK DR	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	6,342	6,342	19,389	85
23790	10		SADDLEBROOK CT	SADDLEBROOK DR	NW END	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	6,231	6,231	19,389	85
23840	10		SADDLEBROOK DR	N 73RD AVE	SADDLEBROOK CT	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	2,599	2,599	19,389	85
23800	20		SADDLEBROOK DR	SADDLEBROOK CT	N 74TH AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	4,217	4,217	19,389	85
19320	10	N	68TH AVE	W LINCOLN AVE	NORTH END	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	11,524	11,524	21,696	85
19420	10	W	LINCOLN AVE	N 66TH AVE	APPLEVIEW RD	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	5,917	5,917	21,696	85
19360	20	W	LINCOLN AVE	APPLEVIEW RD	N 68TH AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	4255	4255	21696	85
69610	10		LAKESIDE CT	NORTH END	FRUITVALE BLVD	30	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	120,884	120,884	120,884	93
6690	10	N	30TH AVE	SOUTH END	HATHAWAY ST	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	6,989	6,989	17,649	85
5600	10		HATHAWAY AVE	N 30TH AVE	DS@333W N 30TH AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	6,192	6,192	17,649	85
72720	20		HATHAWAY AVE	DS@333W N 30TH AVE	WEST END	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	4,468	4,468	17,649	85
2690	30	E	R ST	N 3RD ST	N 4TH ST	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	6,255	6,255	26,199	85
2670	40	E	R ST	N 4TH ST	N 6TH ST	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	6,313	6,313	26,199	85
2620	50	E	R ST	N 6TH ST	DS@331E N 6TH ST	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	5,782	5,782	26,199	85
2610	60	E	R ST	DS@331E N 6TH ST	FREEWAY LAKE RD	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	7,849	7,849	26,199	85
6040	30	N	7TH ST	E H ST	NORTH END	29	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	36,061	36,061	67,983	93
6360	10	E	H ST	N 6TH ST	DS@201E N 6TH ST	29	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	31,922	31,922	67,983	93
39500	10		PACIFIC AVE	S 3RD ST	DS@188E S 3RD ST	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	4,130	4,130	19,601	85
39370	10		PACIFIC AVE	S 1ST ST	DS@189E S 1ST ST	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	4,898	4,898	19,601	85
39420	20		PACIFIC AVE	DS@189E S 1ST ST	S 2ND ST	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	5627	5627	19601	85
39490	30		PACIFIC AVE	S 2ND ST	S 3RD ST	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	4,946	4,946	19,601	85
36830	10		TIETON DR	S 4TH AVE	S 5TH AVE	31	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	74,107	74,107	74,107	93
47670	10		MULDER DR	EAST END	S 9TH AVE	45	2	FWM + Thick Overlay (> 2.0 - 3.0)	52.50	26,828	26,828	26,828	92
50450	50	W	PRASCH AVE	S 13TH AVE	S 14TH AVE	29	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	42,355	42,355	135,117	92
50470	60	W	PRASCH AVE	S 14TH AVE	S 15TH AVE	29	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	45,417	45,417	135,117	92

GISID	Block Number	Street Prefix	On Street	From Street	To Street	Project Current PCI	Year of First Rehab	Rehab Activity	Avg Unit Rate ($/yd2)	Segment Pavement Cost ($)	Segment Total Cost ($)	Whole Project Cost ($)	5 Year Post Rehab PCI
50430	70	W	PRASCH AVE	S 15TH AVE	S 16TH AVE	29	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	47,345	47,345	135,117	93
23030	40		FOLSOM AVE	CUSTER AVE	CLARKE AVE	29	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	73,030	73,030	73,030	92
8630	10		GARRETT ST	N 9TH AVE	DS@162W N 9TH AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	2830	2830	20092	85
8610	20		GARRETT ST	DS@162W N 9TH AVE	N 10TH AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	2,917	2,917	20,092	85
8650	30		GARRETT ST	N 10TH AVE	N 11TH AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	3,304	3,304	20,092	85
72730	40		GARRETT ST	N 11TH AVE	DS@99W N 11TH AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	1,729	1,729	20,092	85
72740	50		GARRETT ST	DS@99W N 11TH AVE	DS@300W N 11TH AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	3511	3511	20092	85
8710	60		GARRETT ST	DS@300W N 11TH AVE	N 15TH AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	5,801	5,801	20,092	85
16950	30		DOUGLAS DR	N 44TH AVE	N 45TH AVE	28	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	102,514	102,514	213,022	92
16940	40		DOUGLAS DR	N 45TH AVE	N 46TH AVE	28	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	33,226	33,226	213,022	93
16910	50		DOUGLAS DR	N 46TH AVE	DOUGLAS DR (CDS)	28	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	77,282	77,282	213,022	93
22290	10		HAVEN WY	N 56TH AVE	DS@413W N 56TH AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	7,448	7,448	14,215	85
22270	20		HAVEN WY	DS@413W N 56TH AVE	DS@697W N 56TH AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	5,299	5,299	14,215	85
22210	30		HAVEN WY	DS@697W N 56TH AVE	WEST END	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	1,468	1,468	14,215	85
30200	10	N	77TH AVE	W YAKIMA AVE	W BARGE ST	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	6757	6757	24247	85
28530	20	N	77TH AVE	W BARGE ST	SUMMITVIEW AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	12,703	12,703	24,247	85
30210	10	W	YAKIMA AVE	EAST END	N 77TH AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	4,787	4,787	24,247	85
27860	10		CANTERBURY LN	N 28TH AVE	DS@311W N 28TH AVE	28	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	49,386	49,386	68,607	93
27840	20		CANTERBURY LN	DS@311W N 28TH AVE	WEST END	28	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	19,221	19,221	68,607	93
32000	10	S	19TH AVE	W YAKIMA AVE	DS@176S W YAKIMA AVE	27	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	23,304	23,304	92,024	93
33430	20	S	19TH AVE	DS@176S W YAKIMA AVE	W CHESTNUT AVE	27	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	21,546	21,546	92,024	93
31120	50	W	YAKIMA AVE	S 19TH AVE	DS@310W S 19TH AVE	27	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	47,174	47,174	92,024	92
31140	20	W	YAKIMA AVE	DS@324W N 16TH AVE	PARK AVE	27	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	23,701	23,701	102,231	93
31160	30	W	YAKIMA AVE	PARK AVE	S 18TH AVE	27	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	36,345	36,345	102,231	92
31170	40	W	YAKIMA AVE	S 18TH AVE	S 19TH AVE	27	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	42,185	42,185	102,231	92
36920	10		BELL AVE	S 40TH AVE	WEST END	28	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	69,968	69,968	69,968	93
35950	20	S	46TH AVE	W CHESTNUT AVE	W WALNUT ST	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	10,336	10,336	21,546	85
38640	30	S	46TH AVE	W WALNUT ST	TIETON DR	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	11,210	11,210	21,546	85
45740	10	S	49TH AVE	W ARLINGTON ST	GLENSIDE CT	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	8,052	8,052	30,961	85
47890	20	S	49TH AVE	GLENSIDE CT	S 50TH AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	17147	17147	30961	85
45770	10		GLENSIDE CT	S 48TH AVE	S 49TH AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	5,762	5,762	30,961	85
47140	50	S	30TH AVE	BONNIE DOONE AVE	SOUTH END	27	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	34,757	34,757	157,569	93
46110	250		BONNIE DOONE AVE	S 29TH AVE	HAGAR AVE	27	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	49,102	49,102	157,569	92
46130	260		BONNIE DOONE AVE	HAGAR AVE	S 30TH AVE	27	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	32,999	32,999	157,569	93
47210	10		HAGAR AVE	BONNIE DOONE AVE	SOUTH END	27	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	40,711	40,711	157,569	93
55920	80	S	20TH AVE	PLATH AVE	W MEAD AVE	28	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	43,659	43,659	216,312	93
56260	10	W	MEAD AVE	S 16TH AVE	DS@346W S 16TH AVE	28	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	48,082	48,082	216,312	93
56270	20	W	MEAD AVE	DS@346W S 16TH AVE	S 18TH AVE	28	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	37,706	37,706	216,312	93
56170	30	W	MEAD AVE	S 18TH AVE	DS@356W S 18TH AVE	28	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	51,824	51,824	216,312	93
55930	40	W	MEAD AVE	DS@356W S 18TH AVE	S 20TH AVE	28	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	56.70	35,041	35,041	216,312	93
50890	10	S	33RD AVE	VINCENTA WY	CLINTON WY	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	7,404	7,404	50,105	85
51780	20	S	33RD AVE	CLINTON WY	CAROL AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	6322	6322	50105	85

IMS Easy Street Analysis

GISID	Block Number	Street Prefix	On Street	From Street	To Street	Project Current PCI	Year of First Rehab	Rehab Activity	Avg Unit Rate ($/yd2)	Segment Pavement Cost ($)	Segment Total Cost ($)	Whole Project Cost ($)	5 Year Post Rehab PCI
52040	30	S	33RD AVE	CAROL AVE	DS@142S CAROL AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	2,318	2,318	50,105	85
52950	40	S	33RD AVE	DS@142S CAROL AVE	W VIOLA AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	2,690	2,690	50,105	85
51800	10		CAROL AVE	S 32ND AVE	S 33RD AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	6,419	6,419	50,105	85
50910	10		CLINTON WY	S 32ND AVE	S 33RD AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	6545	6545	50105	85
49700	10		VINCENTA WY	S 32ND AVE	S 33RD AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	6,153	6,153	50,105	85
52940	10	W	VIOLA AVE	S 32ND AVE	S 33RD AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	6,675	6,675	50,105	85
52960	20	W	VIOLA AVE	S 33RD AVE	S 34TH AVE	62	2	MicroSurface / Chip Seal + Strctrl Ptch	4.83	5,579	5,579	50,105	85
13000	50	E	MARTIN LUTHER KING JR BLVD	N 10TH ST	N FAIR AVE	73	2	MicroSurface / Chip Seal	3.26	3714	3714	3714	85
63430	70		OCCIDENTAL RD	S 78TH AVE	S 79TH AVE	32	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	65.63	121,013	121,013	223,257	91
63440	80		OCCIDENTAL RD	S 79TH AVE	S 80TH AVE	32	2	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	65.63	102,244	102,244	223,257	91
65460	30		AHTANUM RD	DS@1234W S 16TH AVE	S 21ST AVE	44	2	FWM + Thick Overlay (> 2.0 - 3.0)	60.90	264,732	264,732	533,666	91
65490	40		AHTANUM RD	S 21ST AVE	DS@281W S 21ST AVE	44	2	FWM + Thick Overlay (> 2.0 - 3.0)	60.90	107,793	107,793	533,666	91
65500	50		AHTANUM RD	DS@281W S 21ST AVE	S 23RD AVE	44	2	FWM + Thick Overlay (> 2.0 - 3.0)	60.90	161,141	161,141	533,666	91
13800	10	N	8TH ST	E MARTIN LUTHER KING JR BLVD	E LINCOLN AVE	74	2	MicroSurface / Chip Seal	3.57	9757	9757	26000	84
17980	10	N	8TH ST	E YAKIMA AVE	STAFF SGT PENDLETON WAY	74	2	MicroSurface / Chip Seal	3.57	7504	7504	26000	84
16230	20	N	8TH ST	STAFF SGT PENDLETON WAY	E MARTIN LUTHER KING JR BLVD	74	2	MicroSurface / Chip Seal	3.57	8739	8739	26000	84
62030	10	S	57TH AVE	WHATCOM AVE	W WHITMAN ST	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	7,085	7,085	24,505	86
61960	40		WHATCOM AVE	WELLINGTON DR	S 57TH AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	4,574	4,574	24,505	86
61940	50		WHATCOM AVE	S 57TH AVE	S 58TH AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	4,316	4,316	24,505	86
62200	40	W	WHITMAN ST	WELLINGTON DR	S 57TH AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	4,316	4,316	24,505	86
75560	50	W	WHITMAN ST	S 57TH AVE	S 58TH AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	4214	4214	24505	86
44120	10	S	85TH AVE	NORTH END	MIDVALE RD	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	2,211	2,211	17,410	86
45430	20	S	85TH AVE	MIDVALE RD	W ARLINGTON AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	4,260	4,260	17,410	86
45870	30	S	85TH AVE	W ARLINGTON AVE	GROVE AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	4473	4473	17410	86
47020	40	S	85TH AVE	GROVE AVE	WESTBROOK AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	4,306	4,306	17,410	86
47010	10		WESTBROOK AVE	EAST END	S 85TH AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	2160	2160	17410	86
3110	10		SYCAMORE ST	N FRONT ST	N 1ST ST	32	3	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	59.54	70,311	70,311	70,311	94
16810	10	N	3RD ST	E MARTIN LUTHER KING JR BLVD	E LINCOLN AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	14063	14063	38959	86
21210	10	N	3RD ST	E YAKIMA AVE	DS@190N E YAKIMA AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	4,945	4,945	38,959	86
20720	20	N	3RD ST	DS@190N E YAKIMA AVE	STAFF SGT PENDLETON WAY	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	7,480	7,480	38,959	86
19050	30	N	3RD ST	STAFF SGT PENDLETON WAY	E MARTIN LUTHER KING JR BLVD	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	12,471	12,471	38,959	86
29780	10	S	12TH ST	E MAPLE ST	E BEECH ST	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	7,029	7,029	17,091	86
31890	20	S	12TH ST	E BEECH ST	HIGH ST	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	6,821	6,821	17,091	86
33760	30	S	12TH ST	HIGH ST	E RACE ST	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	3241	3241	17091	86
24380	10		BROWNE AVE	PIERCE AVE	DS@434W PIERCE AVE	30	3	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	59.53	72,335	72,335	151,040	94
24320	20		BROWNE AVE	DS@434W PIERCE AVE	KERR ST	30	3	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	59.54	17,682	17,682	151,040	93
24340	30		BROWNE AVE	KERR ST	CUSTER AVE	30	3	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	59.53	61,023	61,023	151,040	93
26820	10	N	85TH AVE	ALPINE WY	SUMMITVIEW AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	6,055	6,055	11,320	86
26850	10		ALPINE WY	EAST END	N 85TH AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	3,089	3,089	11,320	86
26830	20		ALPINE WY	N 85TH AVE	N 85TH AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	2,176	2,176	11,320	86
28940	10	N	69TH AVE	CHINOOK DR	ALPINE WY	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	7176	7176	33167	86
27210	20	N	69TH AVE	ALPINE WY	SUMMITVIEW AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	5,812	5,812	33,167	86

IMS Easy Street Analysis

GISID	Block Number	Street Prefix	On Street	From Street	To Street	Project Current PCI	Year of First Rehab	Rehab Activity	Avg Unit Rate ($/yd2)	Segment Pavement Cost ($)	Segment Total Cost ($)	Whole Project Cost ($)	5 Year Post Rehab PCI
27270	40		ALPINE WY	N 69TH AVE	DS@245W N 69TH AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	4,640	4,640	33,167	86
27970	50		ALPINE WY	DS@245W N 69TH AVE	N 71ST AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	11,299	11,299	33,167	86
27940	60		ALPINE WY	N 71ST AVE	N 72ND AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	4,240	4,240	33,167	86
28270	20	N	66TH AVE	CHINOOK DR	ALPINE WY	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	3,864	3,864	25,576	86
27300	30	N	66TH AVE	ALPINE WY	ALPINE WY	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	1557	1557	25576	86
26840	40	N	66TH AVE	ALPINE WY	NORTH END	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	3,028	3,028	25,576	86
26890	10		ALPINE WY	N 65TH AVE	N 66TH AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	8,916	8,916	25,576	86
28280	10		CHINOOK DR	EAST END	N 66TH AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	8,211	8,211	25,576	86
34010	10		GRAHAM ST	S 18TH AVE	DS@164W S 18TH AVE	64	3	Edge Mill + Thin Overlay (1.5 - 2.0)	49.61	22,772	22,772	45,991	90
34020	20		GRAHAM ST	DS@164W S 18TH AVE	S 19TH AVE	64	3	Edge Mill + Thin Overlay (1.5 - 2.0)	49.61	23219	23219	45991	90
36050	10	S	49TH AVE	MCCARGAR ST	DS@392S MCCARGAR ST	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	6,497	6,497	18,141	86
38600	20	S	49TH AVE	DS@392S MCCARGAR ST	TIETON DR	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	11,644	11,644	18,141	86
35500	10	W	WALNUT ST	S 57TH AVE	S 58TH AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	5,766	5,766	23,380	86
35480	20	W	WALNUT ST	S 58TH AVE	S 59TH AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	6,000	6,000	23,380	86
35460	30	W	WALNUT ST	S 59TH AVE	S 60TH AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	5,782	5,782	23,380	86
35440	40	W	WALNUT ST	S 60TH AVE	S 61ST AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	5832	5832	23380	86
53950	10	S	42ND AVE	W VIOLA AVE	ALLER ST	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	9179	9179	29704	86
55130	10		LAURA LN	S 40TH AVE	DS@786W S 40TH AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	14,880	14,880	29,704	86
55000	10		LAURA LN	S 42ND AVE	DS@289S S 42ND AVE	63	3	MicroSurface / Chip Seal + Strctrl Ptch	5.07	5,645	5,645	29,704	86
13710	70		ENGLEWOOD AVE	N 53RD AVE	N 54TH AVE	32	3	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	62.29	104,961	104,961	268,724	93
13690	80		ENGLEWOOD AVE	N 54TH AVE	N 55TH AVE	32	3	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	62.29	94,620	94,620	268,724	93
13680	90		ENGLEWOOD AVE	N 55TH AVE	N 56TH AVE	32	3	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	62.29	69,143	69,143	268,724	93
63670	10		OCCIDENTAL RD	S 64TH AVE	S 66TH AVE	45	3	FWM + Thick Overlay (> 2.0 - 3.0)	63.95	131,791	131,791	539,057	93
63630	20		OCCIDENTAL RD	S 66TH AVE	S 69TH AVE	45	3	FWM + Thick Overlay (> 2.0 - 3.0)	63.95	178,279	178,279	539,057	93
63610	30		OCCIDENTAL RD	S 69TH AVE	S 72ND AVE	45	3	FWM + Thick Overlay (> 2.0 - 3.0)	63.94	228,987	228,987	539,057	93
63590	40		OCCIDENTAL RD	S 72ND AVE	S 73RD AVE	47	3	FWM + Thick Overlay (> 2.0 - 3.0)	63.94	99,818	99,818	426,897	93
63550	50		OCCIDENTAL RD	S 73RD AVE	S 77TH AVE	47	3	FWM + Thick Overlay (> 2.0 - 3.0)	63.94	255,652	255,652	426,897	93
63470	60		OCCIDENTAL RD	S 77TH AVE	S 78TH AVE	47	3	FWM + Thick Overlay (> 2.0 - 3.0)	63.95	71,427	71,427	426,897	93
65540	60		AHTANUM RD	S 23RD AVE	DS@889W S 23RD AVE	46	3	FWM + Thick Overlay (> 2.0 - 3.0)	63.95	397,930	397,930	866,199	93
65560	70		AHTANUM RD	DS@889W S 23RD AVE	DS@1084W S 23RD AVE	46	3	FWM + Thick Overlay (> 2.0 - 3.0)	63.94	84,407	84,407	866,199	93
65570	80		AHTANUM RD	DS@1084W S 23RD AVE	S 26TH AVE	46	3	FWM + Thick Overlay (> 2.0 - 3.0)	63.94	95,214	95,214	866,199	93
65590	90		AHTANUM RD	S 26TH AVE	DS@328W S 26TH AVE	46	3	FWM + Thick Overlay (> 2.0 - 3.0)	63.95	146,818	146,818	866,199	93
65550	100		AHTANUM RD	DS@328W S 26TH AVE	DS@716W S 26TH AVE	46	3	FWM + Thick Overlay (> 2.0 - 3.0)	63.94	141,830	141,830	866,199	93
56590	10	E	MEAD AVE	S 1ST ST	DS@119E S 1ST ST	65	3	MicroSurface / Chip Seal + Strctrl Ptch	5.4	3900	3900	43013	85
56600	20	E	MEAD AVE	DS@119E S 1ST ST	DS@215E S 1ST ST	65	3	MicroSurface / Chip Seal + Strctrl Ptch	5.4	3144	3144	43013	86
56610	30	E	MEAD AVE	DS@215E S 1ST ST	DS@499E S 1ST ST	65	3	MicroSurface / Chip Seal + Strctrl Ptch	5.40	9,130	9,130	43,013	86
56620	40	E	MEAD AVE	DS@499E S 1ST ST	DS@731E S 1ST ST	65	3	MicroSurface / Chip Seal + Strctrl Ptch	5.4	7601	7601	43013	85
56640	50	E	MEAD AVE	DS@731E S 1ST ST	S FAIR AVE	65	3	MicroSurface / Chip Seal + Strctrl Ptch	5.40	6,915	6,915	43,013	85
56580	20	E	MEAD AVE	MARYLAND ST	S 1ST ST	65	3	MicroSurface / Chip Seal + Strctrl Ptch	5.40	12,323	12,323	43,013	86
69870	10		FAIR AV LP	E YAKIMA AVE	S FAIR AVE	75	3	MicroSurface / Chip Seal	3.64	10973	10973	10973	85
26630	10	E	WALNUT ST	S 1ST ST	DS@203E S 1ST ST	75	3	MicroSurface / Chip Seal	3.64	5,083	5,083	48,889	86
26130	20	E	WALNUT ST	DS@203E S 1ST ST	S 2ND ST	75	3	MicroSurface / Chip Seal	3.64	4984	4984	48889	86

GISID	Block Number	Street Prefix	On Street	From Street	To Street	Project Current PCI	Year of First Rehab	Rehab Activity	Avg Unit Rate ($/yd2)	Segment Pavement Cost ($)	Segment Total Cost ($)	Whole Project Cost ($)	5 Year Post Rehab PCI
25480	30	E	WALNUT ST	S 2ND ST	DS@203E S 2ND ST	75	3	MicroSurface / Chip Seal	3.64	4824	4824	48889	85
25260	40	E	WALNUT ST	DS@203E S 2ND ST	S 3RD ST	75	3	MicroSurface / Chip Seal	3.64	4577	4577	48889	85
24640	50	E	WALNUT ST	S 3RD ST	DS@204E S 3RD ST	75	3	MicroSurface / Chip Seal	3.64	4762	4762	48889	85
24550	60	E	WALNUT ST	DS@204E S 3RD ST	S 4TH ST	75	3	MicroSurface / Chip Seal	3.64	4708	4708	48889	85
24180	70	E	WALNUT ST	S 4TH ST	DS@199E S 4TH ST	75	3	MicroSurface / Chip Seal	3.64	5068	5068	48889	85
24000	80	E	WALNUT ST	DS@199E S 4TH ST	S NACHES AVE	75	3	MicroSurface / Chip Seal	3.64	5697	5697	48889	85
23760	90	E	WALNUT ST	S NACHES AVE	DS@219E S NACHES AVE	75	3	MicroSurface / Chip Seal	3.64	4835	4835	48889	85
23610	100	E	WALNUT ST	DS@219E S NACHES AVE	S 6TH ST	75	3	MicroSurface / Chip Seal	3.64	4351	4351	48889	85
60250	10	S	74TH AVE	FREMONT WY	W WASHINGTON AVE	64	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	3,914	3,914	32,855	87
60120	10		FREMONT WY	S 72ND AVE	S 74TH AVE	64	4	MicroSurface / Chip Seal + Strctrl Ptch	5.32	12,801	12,801	32,855	87
70980	20		FREMONT WY	S 74TH AVE	S 76TH AVE	64	4	MicroSurface / Chip Seal + Strctrl Ptch	5.32	16,140	16,140	32,855	87
46200	10	S	83RD AVE	NORTH END	WESTBROOK AVE	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	4,793	4,793	25,758	87
46260	10		WESTBROOK AVE	S 80TH AVE	S 83RD AVE	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	13,068	13,068	25,758	87
74810	20		WESTBROOK AVE	S 83RD AVE	WEST END	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	7897	7897	25758	87
33740	10	E	MAPLE ST	S 1ST ST	DS@203E S 1ST ST	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.32	4920	4920	19458	87
33490	20	E	MAPLE ST	DS@203E S 1ST ST	S 2ND ST	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	4894	4894	19458	87
34050	10	E	MAPLE ST	S FRONT ST	DS@187E S FRONT ST	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	4,649	4,649	19,458	87
33930	20	E	MAPLE ST	DS@187E S FRONT ST	S 1ST ST	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	4,995	4,995	19,458	87
27560	10	E	SPRUCE ST	S 3RD ST	DS@200E S 3RD ST	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	4,846	4,846	14,660	87
28170	30	E	SPRUCE ST	S 2ND ST	DS@201E S 2ND ST	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	4995	4995	14660	87
27900	40	E	SPRUCE ST	DS@201E S 2ND ST	S 3RD ST	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.32	4,819	4,819	14,660	87
58080	10	E	KING ST	MARYLAND ST	S 1ST ST	31	4	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	62.51	237,857	237,857	413,390	95
58050	10		MARYLAND ST	E MEAD AVE	E KING ST	31	4	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	62.51	175,533	175,533	413,390	95
44960	130	W	ARLINGTON ST	S 14TH AVE	DS@173W S 14TH AVE	30	4	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	62.51	95,893	95,893	277,740	95
44940	140	W	ARLINGTON ST	DS@173W S 14TH AVE	S 15TH AVE	30	4	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	62.51	89,767	89,767	277,740	95
44930	150	W	ARLINGTON ST	S 15TH AVE	DS@164W S 15TH AVE	30	4	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	62.51	92,080	92,080	277,740	95
36560	50	W	PINE ST	DS@193W S 7TH AVE	S 8TH AVE	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	4,702	4,702	34,891	87
36740	60	W	PINE ST	S 8TH AVE	DS@188W S 8TH AVE	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.32	4670	4670	34891	87
37000	70	W	PINE ST	DS@188W S 8TH AVE	S 9TH AVE	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	4,814	4,814	34,891	87
37250	80	W	PINE ST	S 9TH AVE	DS@191W S 9TH AVE	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	5219	5219	34891	87
37350	90	W	PINE ST	DS@191W S 9TH AVE	S 10TH AVE	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	5,075	5,075	34,891	87
37390	100	W	PINE ST	S 10TH AVE	DS@190W S 10TH AVE	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	5192	5192	34891	87
37820	110	W	PINE ST	DS@190W S 10TH AVE	S 11TH AVE	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	5,219	5,219	34,891	87
31860	10	N	78TH AVE	W CHESTNUT AVE	DS@489N W CHESTNUT AVE	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	10331	10331	38144	87
29570	20	N	78TH AVE	DS@489N W CHESTNUT AVE	SUMMITVIEW AVE	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	16,295	16,295	38,144	87
34300	10	S	78TH AVE	W CHESTNUT AVE	SOUTH END	65	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	11518	11518	38144	87
32620	70	W	CHESTNUT AVE	PLUM LN	S 53RD AVE	32	4	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	62.51	144,465	144,465	380,259	95
32530	80	W	CHESTNUT AVE	S 53RD AVE	DS@210W S 53RD AVE	32	4	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	62.51	56,698	56,698	380,259	95
32510	90	W	CHESTNUT AVE	DS@210W S 53RD AVE	S 55TH AVE	32	4	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	62.51	96,893	96,893	380,259	95
32500	100	W	CHESTNUT AVE	S 55TH AVE	S 56TH AVE	32	4	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	62.51	82,203	82,203	380,259	95
35430	10	S	60TH AVE	W CHESTNUT AVE	W WALNUT ST	64	4	MicroSurface / Chip Seal + Strctrl Ptch	5.32	12,748	12,748	36,594	87
36710	20	S	60TH AVE	W WALNUT ST	VIEW HAVEN DR	64	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	5,043	5,043	36,594	87

GISID	Block Number	Street Prefix	On Street	From Street	To Street	Project Current PCI	Year of First Rehab	Rehab Activity	Avg Unit Rate ($/yd2)	Segment Pavement Cost ($)	Segment Total Cost ($)	Whole Project Cost ($)	5 Year Post Rehab PCI
38090	30	S	60TH AVE	VIEW HAVEN DR	TIETON DR	**64**	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	6,630	6,630	36,594	87
38060	10	S	61ST AVE	VIEW HAVEN DR	TIETON DR	**64**	4	MicroSurface / Chip Seal + Strctrl Ptch	5.32	6560	6560	36594	87
36750	10		VIEW HAVEN DR	S 60TH AVE	S 61ST AVE	**64**	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	5613	5613	36594	87
34530	20	S	67TH AVE	W CHESTNUT AVE	DS@469S W CHESTNUT AVE	**64**	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	9,905	9,905	28,495	87
35570	30	S	67TH AVE	DS@469S W CHESTNUT AVE	DS@724S W CHESTNUT AVE	**64**	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	5389	5389	28495	87
37930	40	S	67TH AVE	DS@724S W CHESTNUT AVE	TIETON DR	**64**	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	13,201	13,201	28,495	87
42710	10	S	49TH AVE	NORTH END	BRISTOL WY	**65**	4	MicroSurface / Chip Seal + Strctrl Ptch	5.32	3,296	3,296	14,213	87
42740	10		BRISTOL WY	S 48TH AVE	S 49TH AVE	**65**	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	5288	5288	14213	87
42720	20		BRISTOL WY	S 49TH AVE	S 50TH AVE	**65**	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	5629	5629	14213	87
52190	10		KARR AVE	W VIOLA AVE	W VIOLA AVE	**65**	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	3,712	3,712	27,675	87
53350	20		KARR AVE	W VIOLA AVE	LILA AVE	**65**	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	4,633	4,633	27,675	87
54080	30		KARR AVE	LILA AVE	W LOGAN AVE	**65**	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	6,204	6,204	27,675	87
51770	10	W	VIOLA AVE	S 25TH AVE	HAMILTON AVE	**65**	4	MicroSurface / Chip Seal + Strctrl Ptch	5.33	4436	4436	27675	87
51750	20	W	VIOLA AVE	HAMILTON AVE	S 26TH AVE	**65**	4	MicroSurface / Chip Seal + Strctrl Ptch	5.32	4329	4329	27675	87
51760	30	W	VIOLA AVE	S 26TH AVE	KARR AVE	**65**	4	MicroSurface / Chip Seal + Strctrl Ptch	5.32	4,361	4,361	27,675	87
13820	40		ENGLEWOOD AVE	N 50TH AVE	N 51ST AVE	**35**	4	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	65.41	68,480	68,480	202,235	94
13770	50		ENGLEWOOD AVE	N 51ST AVE	N 52ND AVE	**35**	4	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	65.41	61,612	61,612	202,235	94
13750	60		ENGLEWOOD AVE	N 52ND AVE	N 53RD AVE	**35**	4	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	65.41	72,143	72,143	202,235	94
39070	20		TIETON DR	DS@168W S 16TH AVE	S 17TH AVE	**76**	4	MicroSurface / Chip Seal	3.82	3163	3163	82064	87
38990	30		TIETON DR	S 17TH AVE	DS@165W S 17TH AVE	**76**	4	MicroSurface / Chip Seal	3.82	3014	3014	82064	87
38950	40		TIETON DR	DS@165W S 17TH AVE	S 18TH AVE	**76**	4	MicroSurface / Chip Seal	3.82	3052	3052	82064	87
38920	50		TIETON DR	S 18TH AVE	DS@168W S 18TH AVE	**76**	4	MicroSurface / Chip Seal	3.82	3071	3071	82064	87
38900	60		TIETON DR	DS@168W S 18TH AVE	S 19TH AVE	**76**	4	MicroSurface / Chip Seal	3.82	3014	3014	82064	87
38890	70		TIETON DR	S 19TH AVE	DS@161W S 19TH AVE	**76**	4	MicroSurface / Chip Seal	3.82	3014	3014	82064	87
38860	80		TIETON DR	DS@161W S 19TH AVE	S 20TH AVE	**76**	4	MicroSurface / Chip Seal	3.82	3106	3106	82064	87
38820	90		TIETON DR	S 20TH AVE	DS@136W S 20TH AVE	**76**	4	MicroSurface / Chip Seal	3.82	2487	2487	82064	87
38810	100		TIETON DR	DS@136W S 20TH AVE	S 21ST AVE	**76**	4	MicroSurface / Chip Seal	3.82	3217	3217	82064	87
38800	110		TIETON DR	S 21ST AVE	S 22ND AVE	**76**	4	MicroSurface / Chip Seal	3.82	6215	6215	82064	87
38790	120		TIETON DR	S 22ND AVE	S 23RD AVE	**76**	4	MicroSurface / Chip Seal	3.82	7365	7365	82064	87
38780	130		TIETON DR	S 23RD AVE	S 23RD AVE	**76**	4	MicroSurface / Chip Seal	3.82	1746	1746	82064	87
38770	140		TIETON DR	S 23RD AVE	S 24TH AVE	**76**	4	MicroSurface / Chip Seal	3.82	3136	3136	82064	87
38750	150		TIETON DR	S 24TH AVE	DS@145W S 24TH AVE	**76**	4	MicroSurface / Chip Seal	3.82	2651	2651	82064	87
38730	160		TIETON DR	DS@145W S 24TH AVE	S 25TH AVE	**76**	4	MicroSurface / Chip Seal	3.82	3014	3014	82064	87
38720	170		TIETON DR	S 25TH AVE	DS@165W S 25TH AVE	**76**	4	MicroSurface / Chip Seal	3.82	2942	2942	82064	87
38700	180		TIETON DR	DS@165W S 25TH AVE	S 26TH AVE	**76**	4	MicroSurface / Chip Seal	3.82	3125	3125	82064	87
38690	190		TIETON DR	S 26TH AVE	DS@152W S 26TH AVE	**76**	4	MicroSurface / Chip Seal	3.82	2846	2846	82064	87
38620	200		TIETON DR	DS@152W S 26TH AVE	S 27TH AVE	**76**	4	MicroSurface / Chip Seal	3.82	2976	2976	82064	87
38550	210		TIETON DR	S 27TH AVE	S 28TH AVE	**76**	4	MicroSurface / Chip Seal	3.82	6120	6120	82064	87
38470	220		TIETON DR	S 28TH AVE	DS@349W S 28TH AVE	**76**	4	MicroSurface / Chip Seal	3.82	6689	6689	82064	87
38390	230		TIETON DR	DS@349W S 28TH AVE	S 30TH AVE	**76**	4	MicroSurface / Chip Seal	3.82	6101	6101	82064	87
63480	90		OCCIDENTAL RD	S 80TH AVE	DS@1335W S 80TH AVE	**36**	4	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	72.35	338,099	338,099	338,099	94
70750	10		AHTANUM RD	S 14TH AVE	S 16TH AVE	**49**	4	FWM + Thick Overlay (> 2.0 - 3.0)	67.14	304,960	304,960	821,955	94

GISID	Block Number	Street Prefix	On Street	From Street	To Street	Project Current PCI	Year of First Rehab	Rehab Activity	Avg Unit Rate ($/yd2)	Segment Pavement Cost ($)	Segment Total Cost ($)	Whole Project Cost ($)	5 Year Post Rehab PCI
65350	10		AHTANUM RD	S 16TH AVE	DS@598W S 16TH AVE	49	4	FWM + Thick Overlay (> 2.0 - 3.0)	67.14	252,925	252,925	821,955	94
65430	20		AHTANUM RD	DS@598W S 16TH AVE	DS@1234W S 16TH AVE	49	4	FWM + Thick Overlay (> 2.0 - 3.0)	67.14	264,070	264,070	821,955	94
13980	10		BELLEVUE PL	ENGLEWOOD AVE	NORTH END	67	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	6067	6067	6067	88
28780	10	E	SPRUCE ST	S 1ST ST	DS@200E S 1ST ST	67	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	5,088	5,088	10,282	88
28370	20	E	SPRUCE ST	DS@200E S 1ST ST	S 2ND ST	67	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	5194	5194	10282	88
53790	30		SIMPSON LN	S 15TH ST	S 16TH ST	66	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	4764	4764	14728	88
53840	40		SIMPSON LN	S 16TH ST	S 17TH ST	66	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	4982	4982	14728	88
53880	50		SIMPSON LN	S 17TH ST	S 18TH ST	66	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	4,982	4,982	14,728	88
18470	10	N	3RD AVE	W LINCOLN AVE	W D ST	66	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	18820	18820	22018	88
16360	20	N	3RD AVE	W D ST	NORTH END	66	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	3,198	3,198	22,018	88
70100	10	S	14TH AVE	TERRACE ST	DS@183S TERRACE ST	66	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	3,701	3,701	7,028	88
70080	20	S	14TH AVE	DS@183S TERRACE ST	W CHESTNUT AVE	66	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	3327	3327	7028	88
18910	40		GARFIELD AVE	CLARKE AVE	LEWIS AVE	66	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	9,103	9,103	25,804	88
18940	50		GARFIELD AVE	LEWIS AVE	N 16TH AVE	66	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	16701	16701	25804	88
9610	20	N	10TH AVE	WILLOW ST	GARRETT ST	66	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	7252	7252	14291	88
8600	30	N	10TH AVE	GARRETT ST	FRUITVALE BLVD	66	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	7,039	7,039	14,291	88
7970	10		CASTLEVALE RD	EAST END	N 24TH AVE	66	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	6,039	6,039	6,039	88
20020	10	N	37TH AVE	W LINCOLN AVE	RICHEY RD	33	5	FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch	65.64	85,919	85,919	85,919	96
26080	10	N	27TH AVE	SUMMITVIEW AVE	DS@754N SUMMITVIEW AVE	66	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	15,248	15,248	27,023	88
22570	20	N	27TH AVE	DS@754N SUMMITVIEW AVE	W LINCOLN AVE	66	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	11775	11775	27023	88
35710	10	S	37TH AVE	W CHESTNUT AVE	W WALNUT ST	67	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	13033	13033	21990	88
38360	20	S	37TH AVE	W WALNUT ST	TIETON DR	67	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	8957	8957	21990	88
35550	10	S	69TH AVE	W CHESTNUT AVE	W WALNUT ST	66	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	16237	16237	43892	88
37890	20	S	69TH AVE	W WALNUT ST	TIETON DR	66	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	13811	13811	43892	88
35590	10	W	WALNUT ST	S 68TH AVE	S 69TH AVE	66	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	7,017	7,017	43,892	88
35560	20	W	WALNUT ST	S 69TH AVE	S 70TH AVE	66	5	MicroSurface / Chip Seal + Strctrl Ptch	5.59	6,827	6,827	43,892	88
20080	10	W	LINCOLN AVE	N 40TH AVE	N 41ST AVE	68	5	MicroSurface / Chip Seal + Strctrl Ptch	5.71	8,209	8,209	31,718	88
20090	20	W	LINCOLN AVE	N 41ST AVE	N 42ND AVE	68	5	MicroSurface / Chip Seal + Strctrl Ptch	5.71	8015	8015	31718	88
20070	30	W	LINCOLN AVE	N 42ND AVE	DS@327W N 42ND AVE	68	5	MicroSurface / Chip Seal + Strctrl Ptch	5.71	7844	7844	31718	88
20150	40	W	LINCOLN AVE	DS@327W N 42ND AVE	N 44TH AVE	68	5	MicroSurface / Chip Seal + Strctrl Ptch	5.71	7650	7650	31718	88
7650	10		POWERHOUSE RD	CASTLEVALE RD	GARRETT LN	69	5	MicroSurface / Chip Seal + Strctrl Ptch	5.96	8517	8517	22454	88
7000	20		POWERHOUSE RD	GARRETT LN	N 40TH AVE	69	5	MicroSurface / Chip Seal + Strctrl Ptch	5.96	13937	13937	22454	88
47750	40	W	NOB HILL BLVD	S 75TH AVE	S 76TH AVE	78	5	MicroSurface / Chip Seal	4.01	8127	8127	29952	88
47740	50	W	NOB HILL BLVD	S 76TH AVE	DS@295W S 76TH AVE	78	5	MicroSurface / Chip Seal	4.01	4970	4970	29952	88
47720	70	W	NOB HILL BLVD	S 78TH AVE	S 80TH AVE	78	5	MicroSurface / Chip Seal	4.01	13498	13498	29952	88
55140	60	S	72ND AVE	WILLOW CT	WILLOW PL	53	5	FWM + Thick Overlay (> 2.0 - 3.0)	70.50	23,406	23,406	23,406	96
49890	20	S	FAIR AVE	DS@158S E NOB HILL BLVD	LA FOLLETTE ST	78	5	MicroSurface / Chip Seal	4.01	3341	3341	51832	88
51020	30	S	FAIR AVE	LA FOLLETTE ST	WILSON LN	78	5	MicroSurface / Chip Seal	4.01	7120	7120	51832	88
53120	40	S	FAIR AVE	WILSON LN	E VIOLA AVE	78	5	MicroSurface / Chip Seal	4.01	13590	13590	51832	88
53760	50	S	FAIR AVE	E VIOLA AVE	SIMPSON LN	78	5	MicroSurface / Chip Seal	4.01	6803	6803	51832	88
54160	60	S	FAIR AVE	SIMPSON LN	TENNANT LN	78	5	MicroSurface / Chip Seal	4.01	2635	2635	51832	88
55010	70	S	FAIR AVE	TENNANT LN	ILER LN	78	5	MicroSurface / Chip Seal	4.01	4208	4208	51832	88

GISID	Block Number	Street Prefix	On Street	From Street	To Street	Project Current PCI	Year of First Rehab	Rehab Activity	Avg Unit Rate ($/yd2)	Segment Pavement Cost ($)	Segment Total Cost ($)	Whole Project Cost ($)	5 Year Post Rehab PCI
55310	80	S	FAIR AVE	ILER LN	LINDY LN	**78**	5	MicroSurface / Chip Seal	4.01	4368	4368	51832	88
56630	90	S	FAIR AVE	LINDY LN	E MEAD AVE	**78**	5	MicroSurface / Chip Seal	4.01	9767	9767	51832	88
23850	30	W	YAKIMA AVE	N 1ST AVE	N 2ND AVE	**52**	5	FWM + Thick Overlay (> 2.0 - 3.0)	73.54	210,319	210,319	1,277,283	96
24270	40	W	YAKIMA AVE	N 2ND AVE	N 3RD AVE	**52**	5	FWM + Thick Overlay (> 2.0 - 3.0)	73.54	219,658	219,658	1,277,283	96
24690	50	W	YAKIMA AVE	N 3RD AVE	N 4TH AVE	**52**	5	FWM + Thick Overlay (> 2.0 - 3.0)	73.54	199,509	199,509	1,277,283	96
25530	60	W	YAKIMA AVE	N 4TH AVE	S 5TH AVE	**52**	5	FWM + Thick Overlay (> 2.0 - 3.0)	73.54	219,658	219,658	1,277,283	96
26650	10	W	YAKIMA AVE	S 5TH AVE	N 6TH AVE	**52**	5	FWM + Thick Overlay (> 2.0 - 3.0)	73.54	215,687	215,687	1,277,283	96
27170	20	W	YAKIMA AVE	N 6TH AVE	S 7TH AVE	**52**	5	FWM + Thick Overlay (> 2.0 - 3.0)	73.54	212,452	212,452	1,277,283	96
17970	10	E	YAKIMA AVE	N 8TH ST	DS@181E N 8TH ST	**52**	5	FWM + Thick Overlay (> 2.0 - 3.0)	73.54	105,601	105,601	1,123,662	96
17720	20	E	YAKIMA AVE	DS@181E N 8TH ST	N 9TH ST	**52**	5	FWM + Thick Overlay (> 2.0 - 3.0)	73.54	111,999	111,999	1,123,662	96
19170	10	E	YAKIMA AVE	N 6TH ST	DS@205E N 6TH ST	**52**	5	FWM + Thick Overlay (> 2.0 - 3.0)	73.54	117,808	117,808	1,123,662	96
19060	20	E	YAKIMA AVE	DS@205E N 6TH ST	S 7TH ST	**52**	5	FWM + Thick Overlay (> 2.0 - 3.0)	73.54	105,748	105,748	1,123,662	96
18870	30	E	YAKIMA AVE	S 7TH ST	DS@196E S 7TH ST	**52**	5	FWM + Thick Overlay (> 2.0 - 3.0)	73.54	112,660	112,660	1,123,662	96
18450	40	E	YAKIMA AVE	DS@196E S 7TH ST	N 8TH ST	**52**	5	FWM + Thick Overlay (> 2.0 - 3.0)	73.54	109,792	109,792	1,123,662	96
20900	40	E	YAKIMA AVE	S 4TH ST	N NACHES AVE	**52**	5	FWM + Thick Overlay (> 2.0 - 3.0)	73.54	219,805	219,805	1,123,662	96
19890	50	E	YAKIMA AVE	N NACHES AVE	DS@223E N NACHES AVE	**52**	5	FWM + Thick Overlay (> 2.0 - 3.0)	73.54	128,177	128,177	1,123,662	96
19490	60	E	YAKIMA AVE	DS@223E N NACHES AVE	N 6TH ST	**52**	5	FWM + Thick Overlay (> 2.0 - 3.0)	73.54	112,072	112,072	1,123,662	96
15070	10	N	6TH ST	E MARTIN LUTHER KING JR BLVD	E LINCOLN AVE	**79**	5	MicroSurface / Chip Seal	4.13	9179	9179	30384	88
19180	10	N	6TH ST	E YAKIMA AVE	STAFF SGT PENDLETON WAY	**79**	5	MicroSurface / Chip Seal	4.13	11911	11911	30384	88
17030	20	N	6TH ST	STAFF SGT PENDLETON WAY	E MARTIN LUTHER KING JR BLVD	**79**	5	MicroSurface / Chip Seal	4.13	9294	9294	30384	88
16510	40	N	32ND AVE	PONDEROSA PL	REDWOOD WY	**73**	1	MicroSurface / Chip Seal	3.3	1683	1683	11048	83
47730	60	W	NOB HILL BLVD	DS@295W S 76TH AVE	S 78TH AVE	**78**	5	MicroSurface / Chip Seal	4.01	3357	3357	29952	88
15790	50	N	32ND AVE	REDWOOD WY	DITTER DR	**73**	1	MicroSurface / Chip Seal	3.3	1125	1125	11048	83


Appendix C

Full-Size Maps


City of Yakima

Pavement Analysis

Pavetype
by Segment

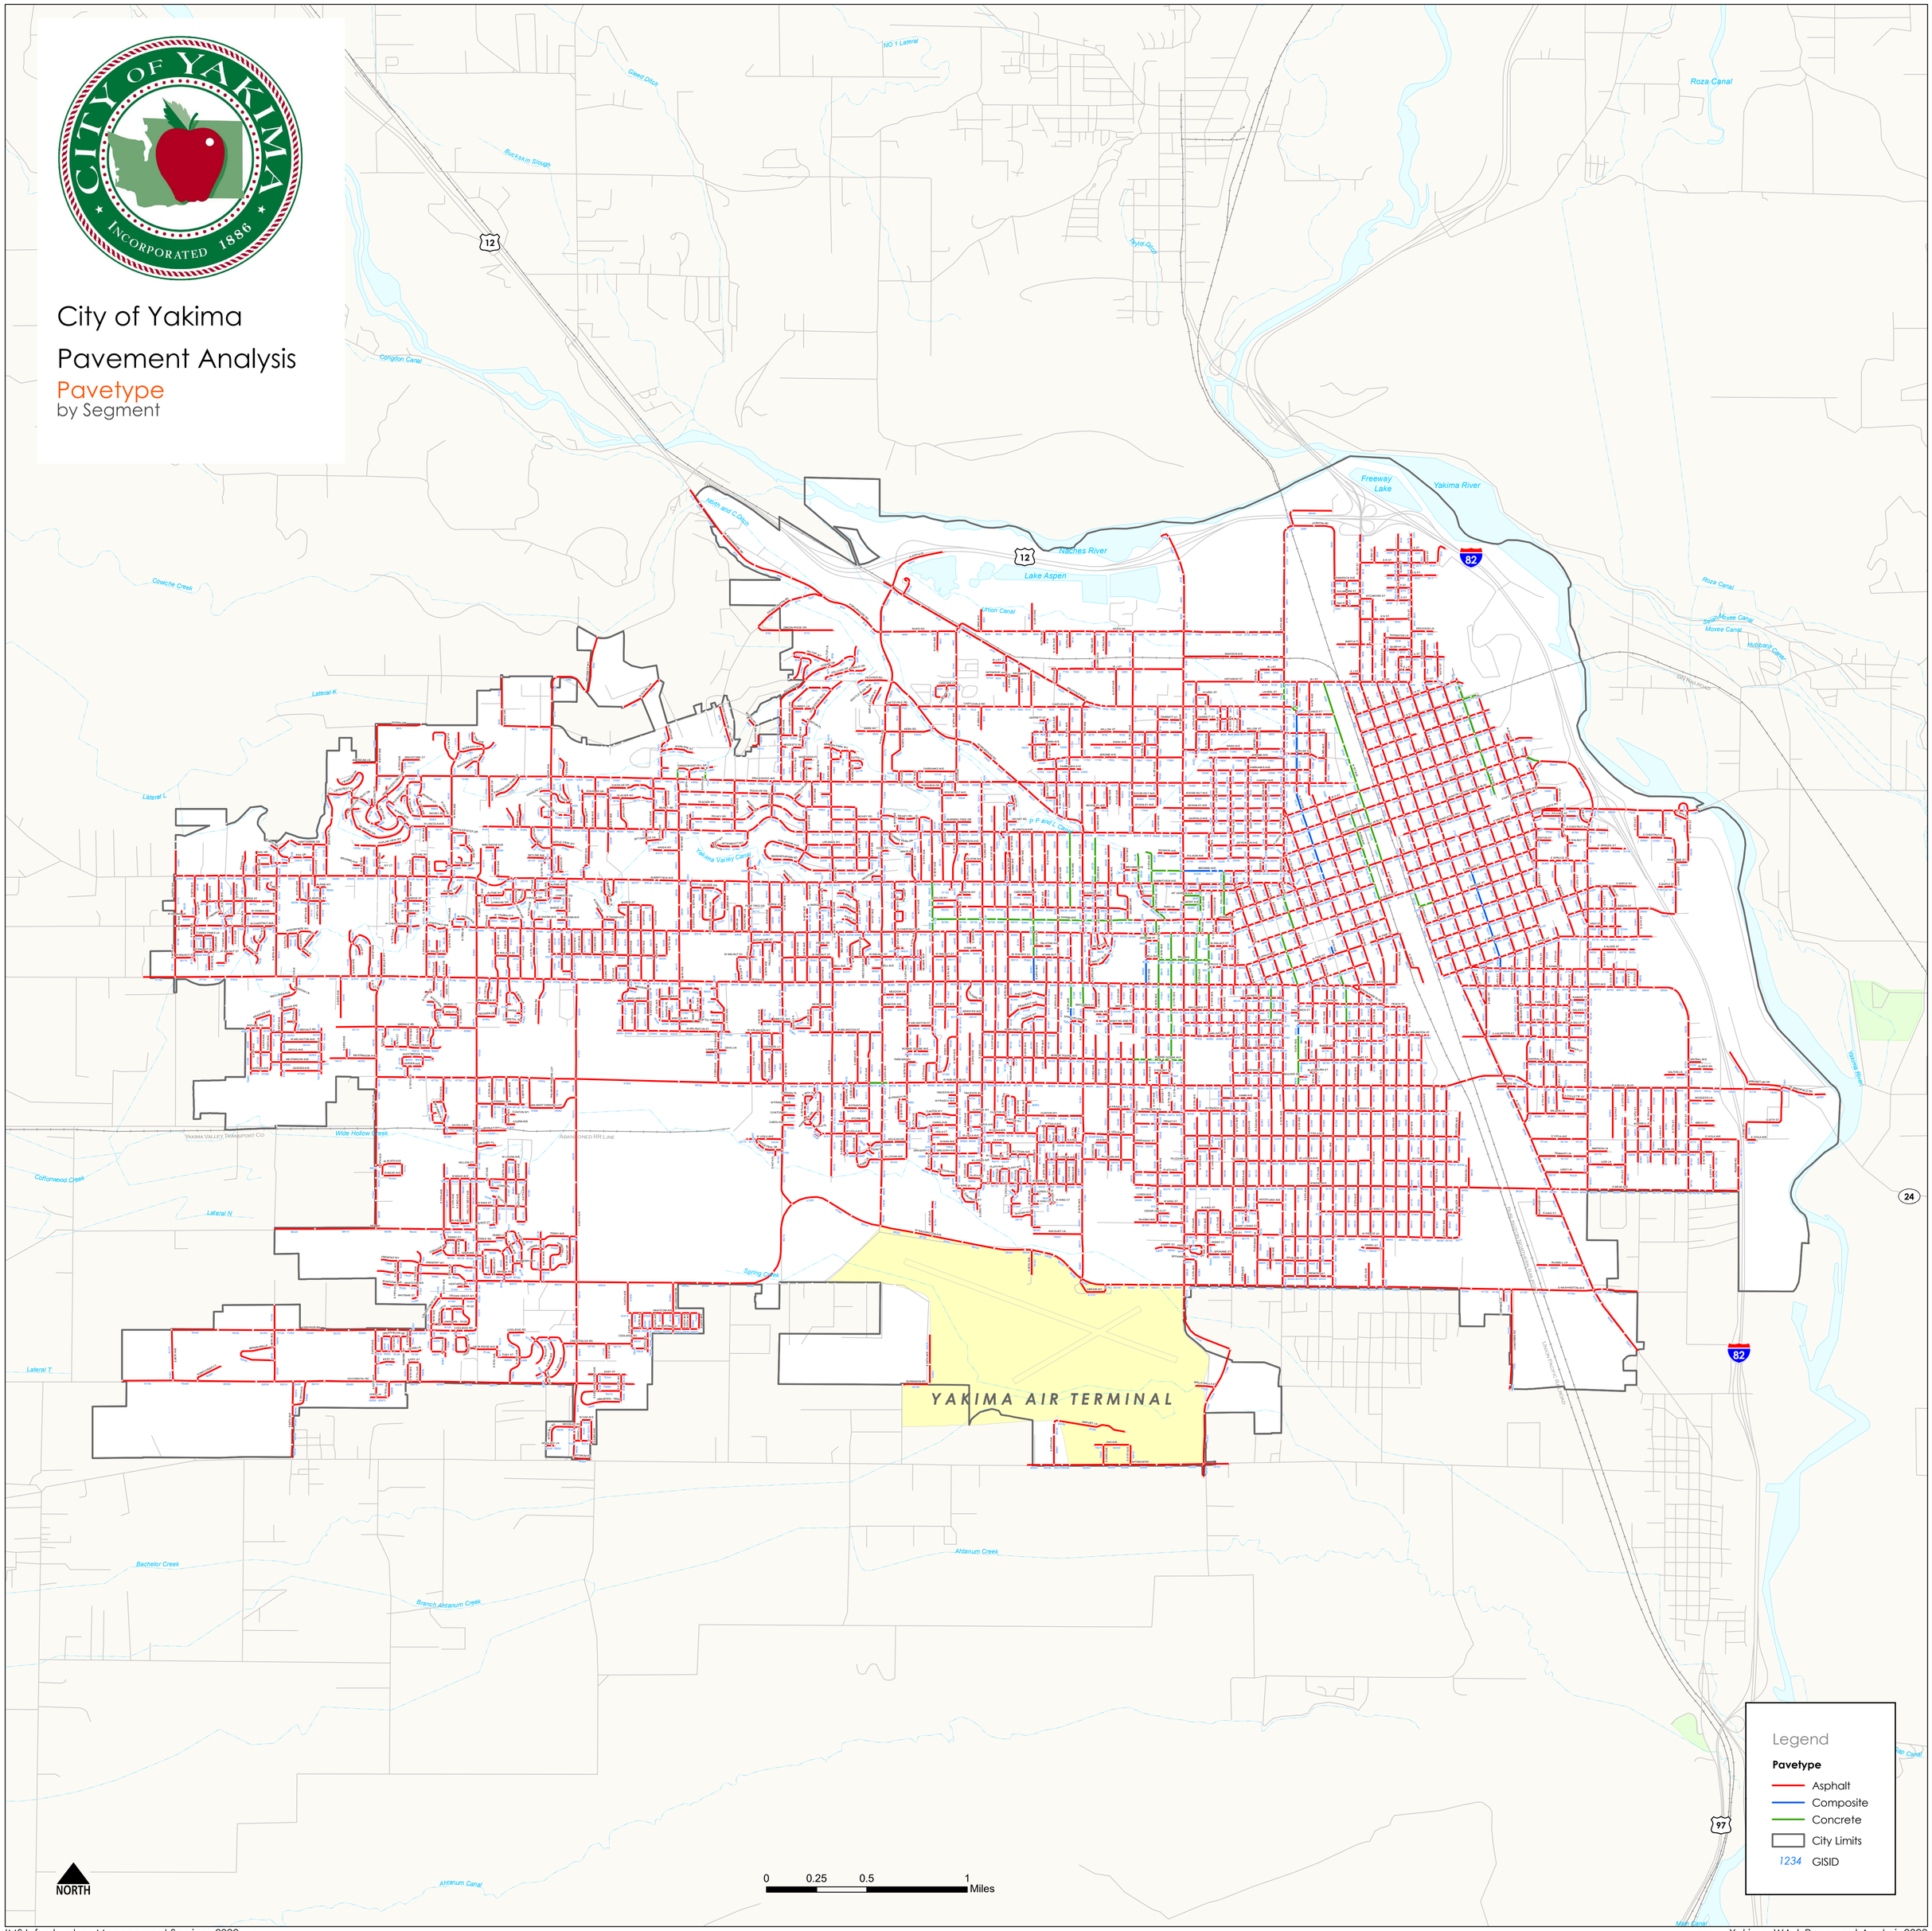


City of Yakima
Pavement Analysis
Functional Classification
by Segment

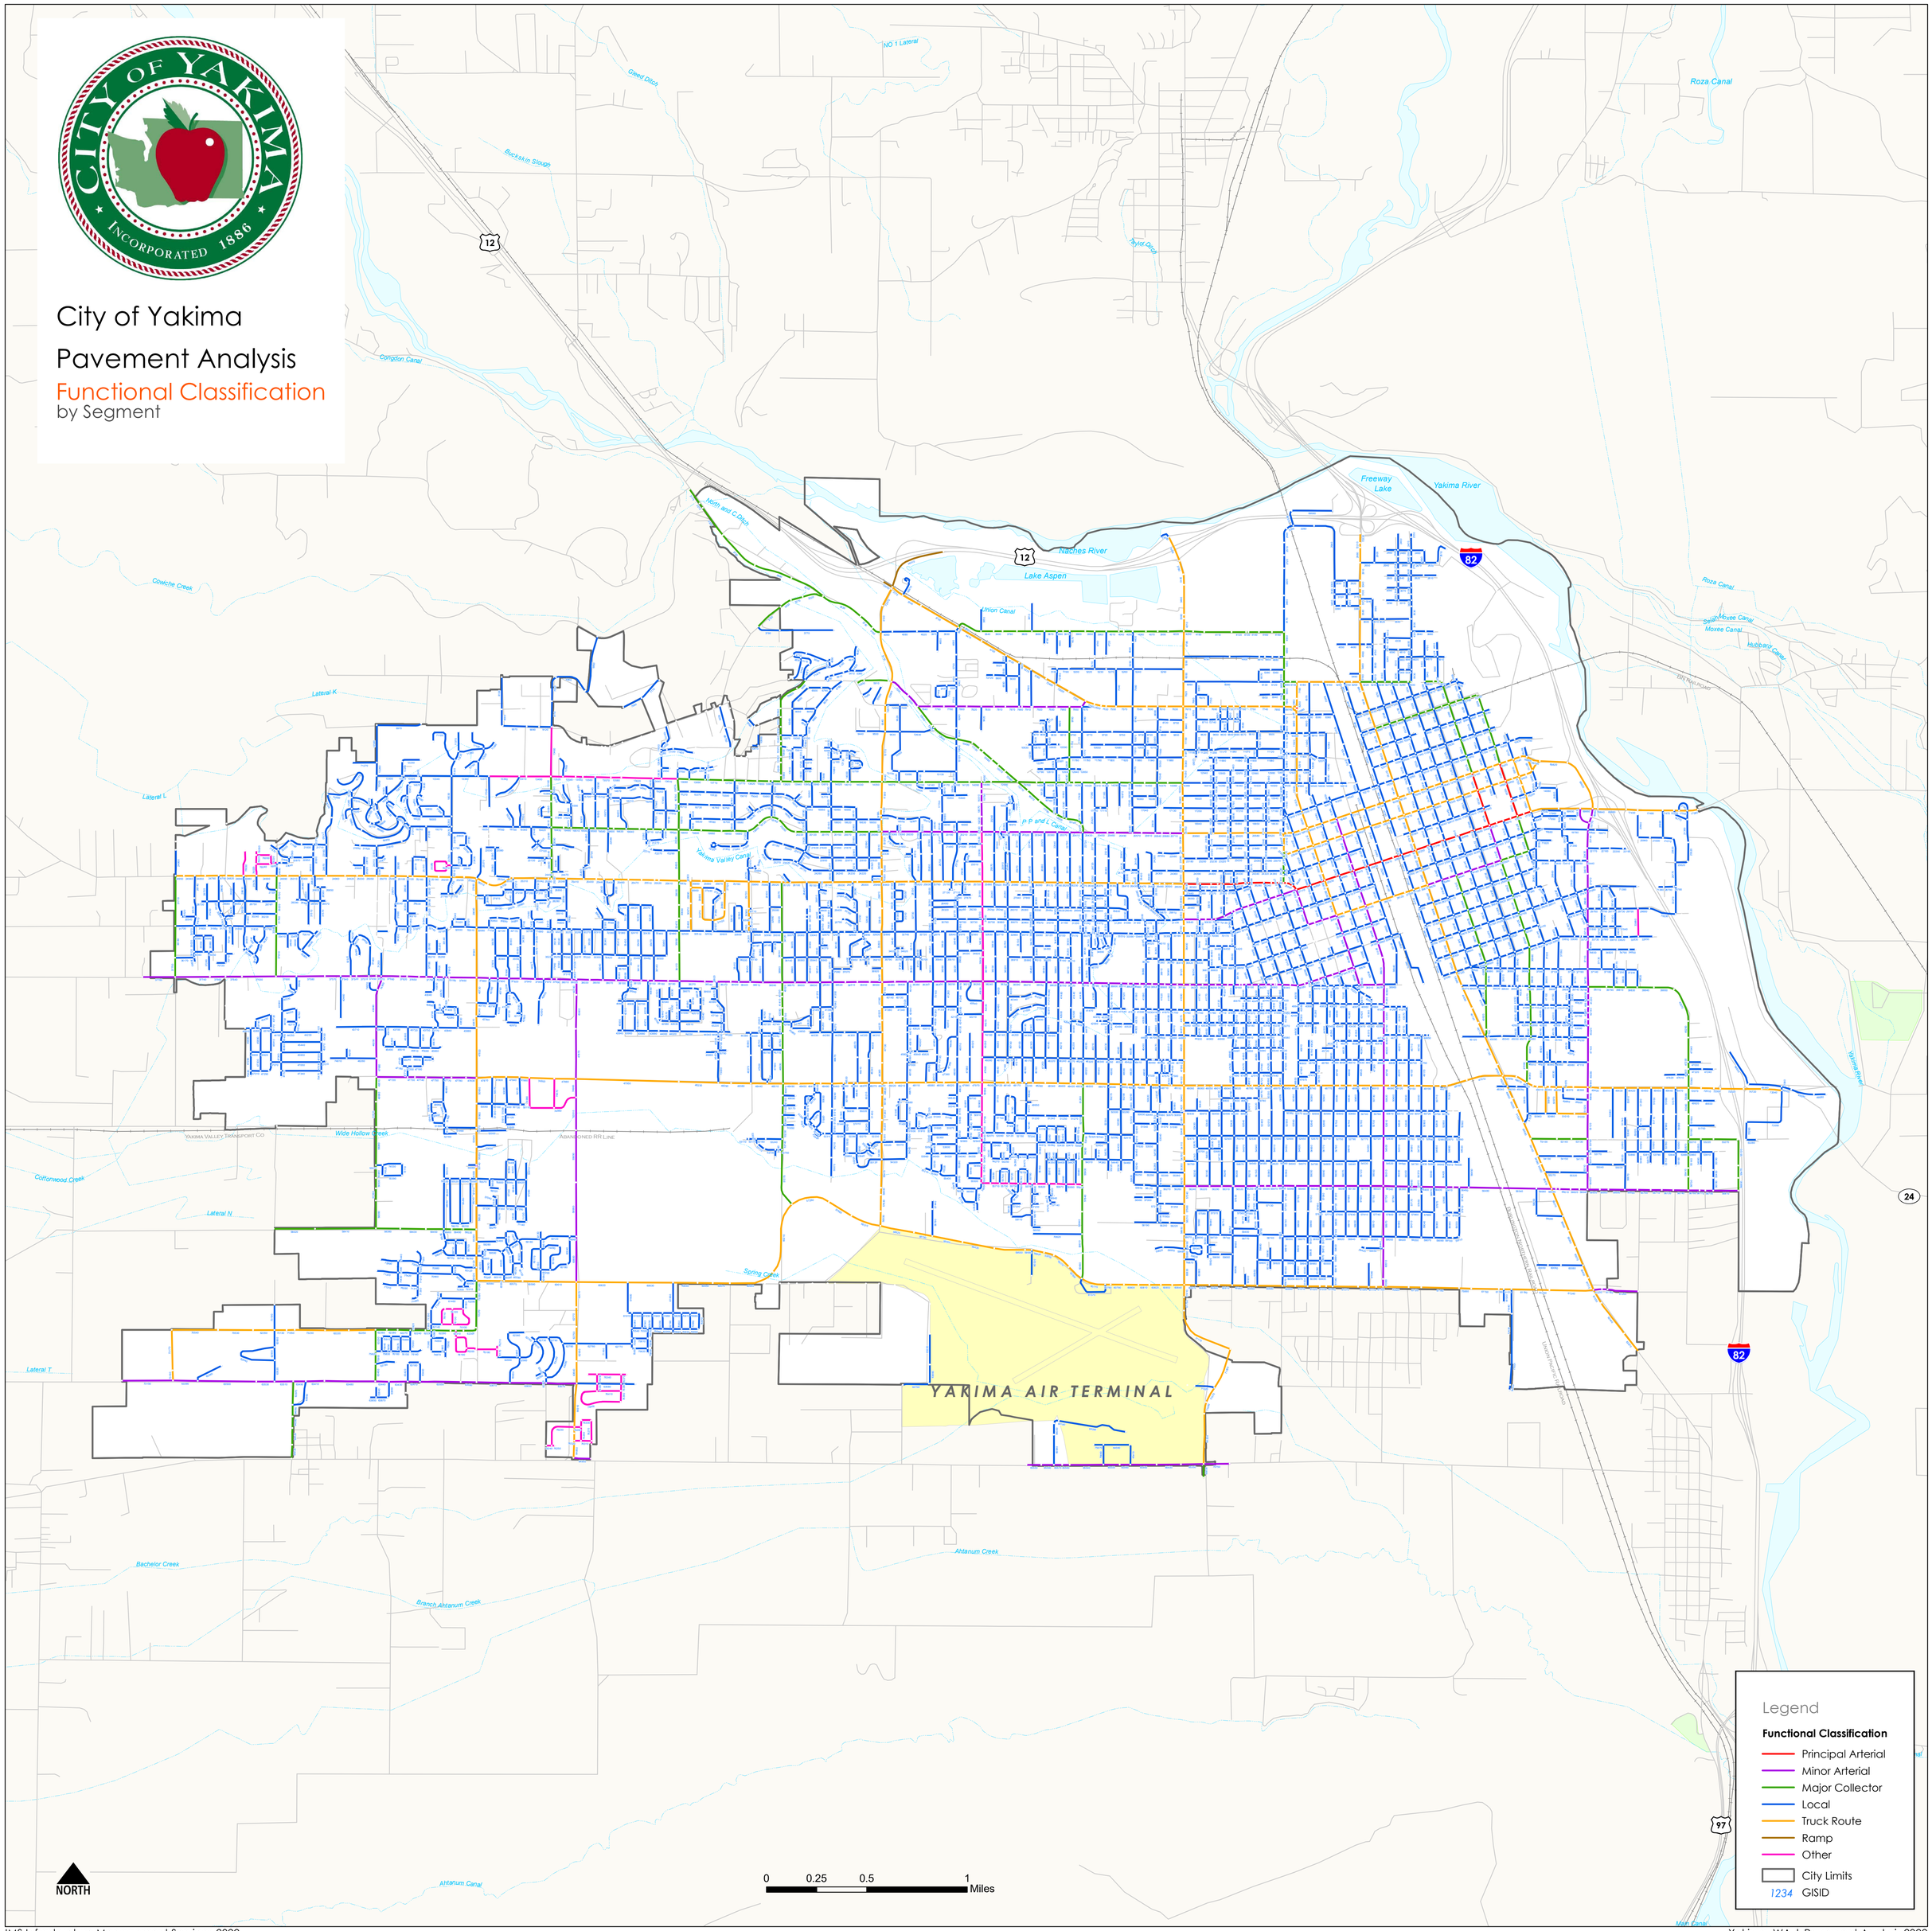

City of Yakima

Pavement Analysis
Pavement Condition Index
As of August 2021
by Segment

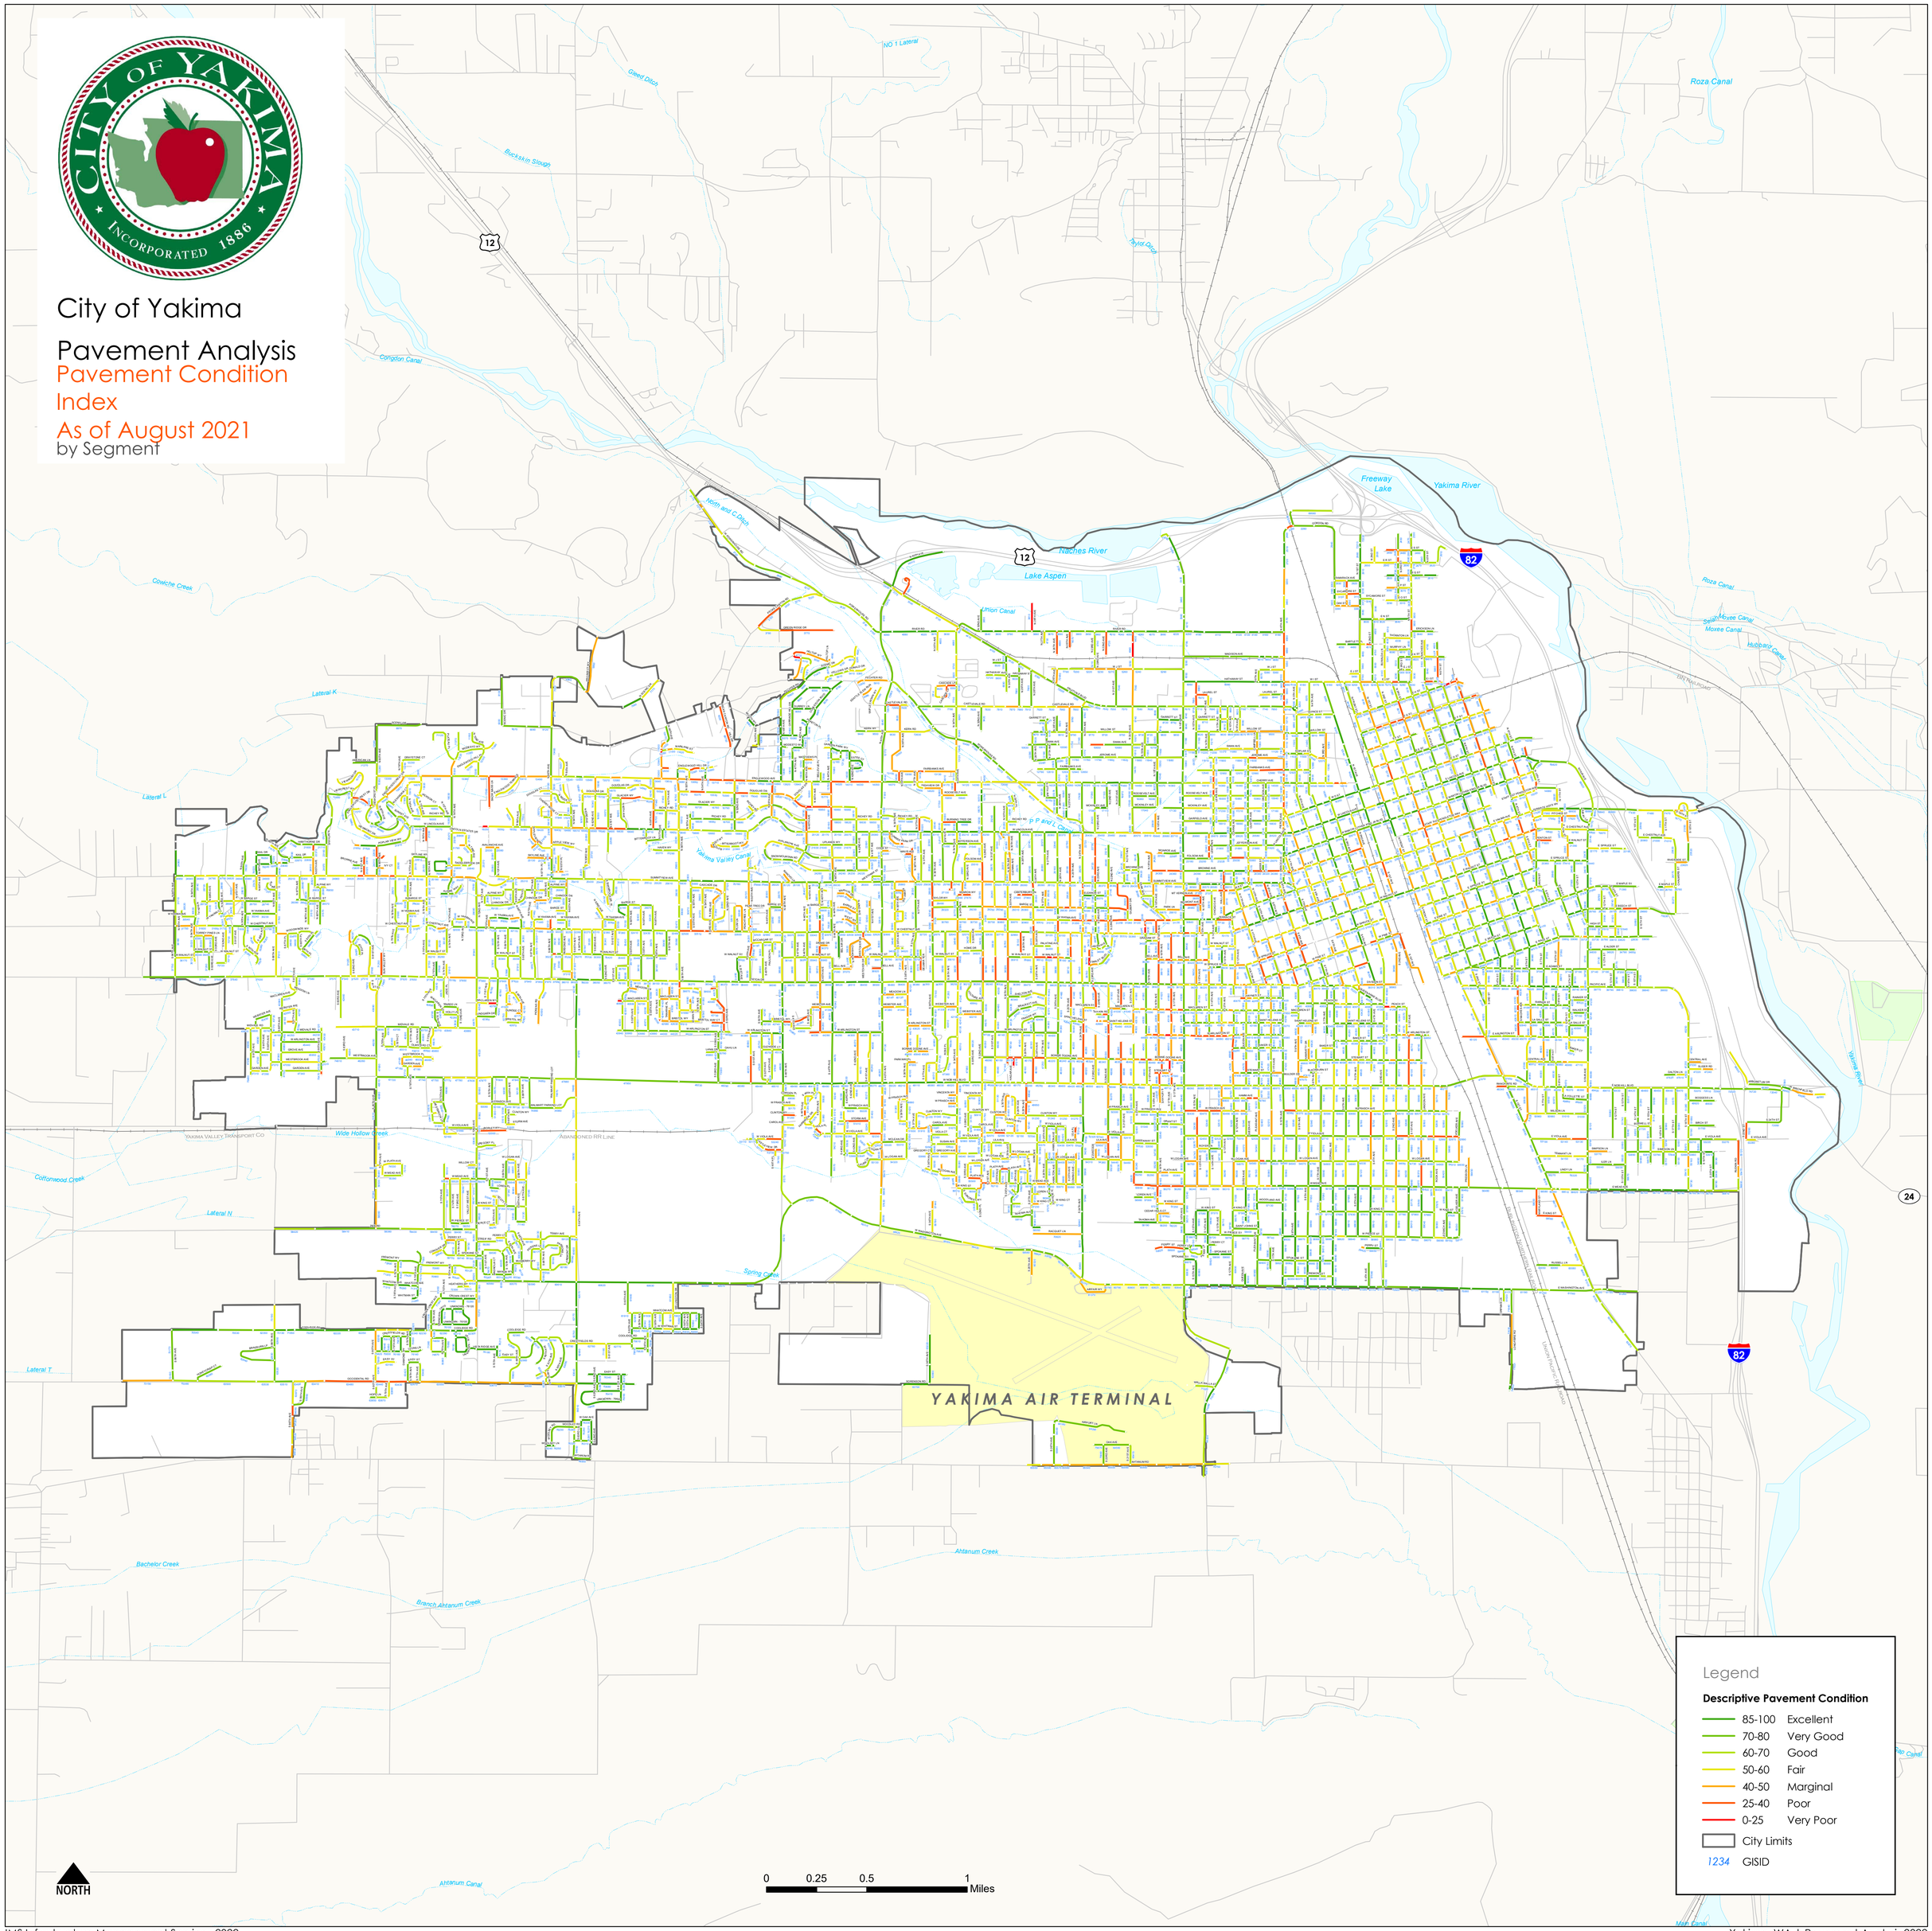

Legend

Descriptive Pavement Condition

85-100	Excellent
70-80	Very Good
60-70	Good
50-60	Fair
40-50	Marginal
25-40	Poor
0-25	Very Poor

City Limits


1234 GISID

City of Yakima

Pavement Analysis

Assembled Projects

by Project ID

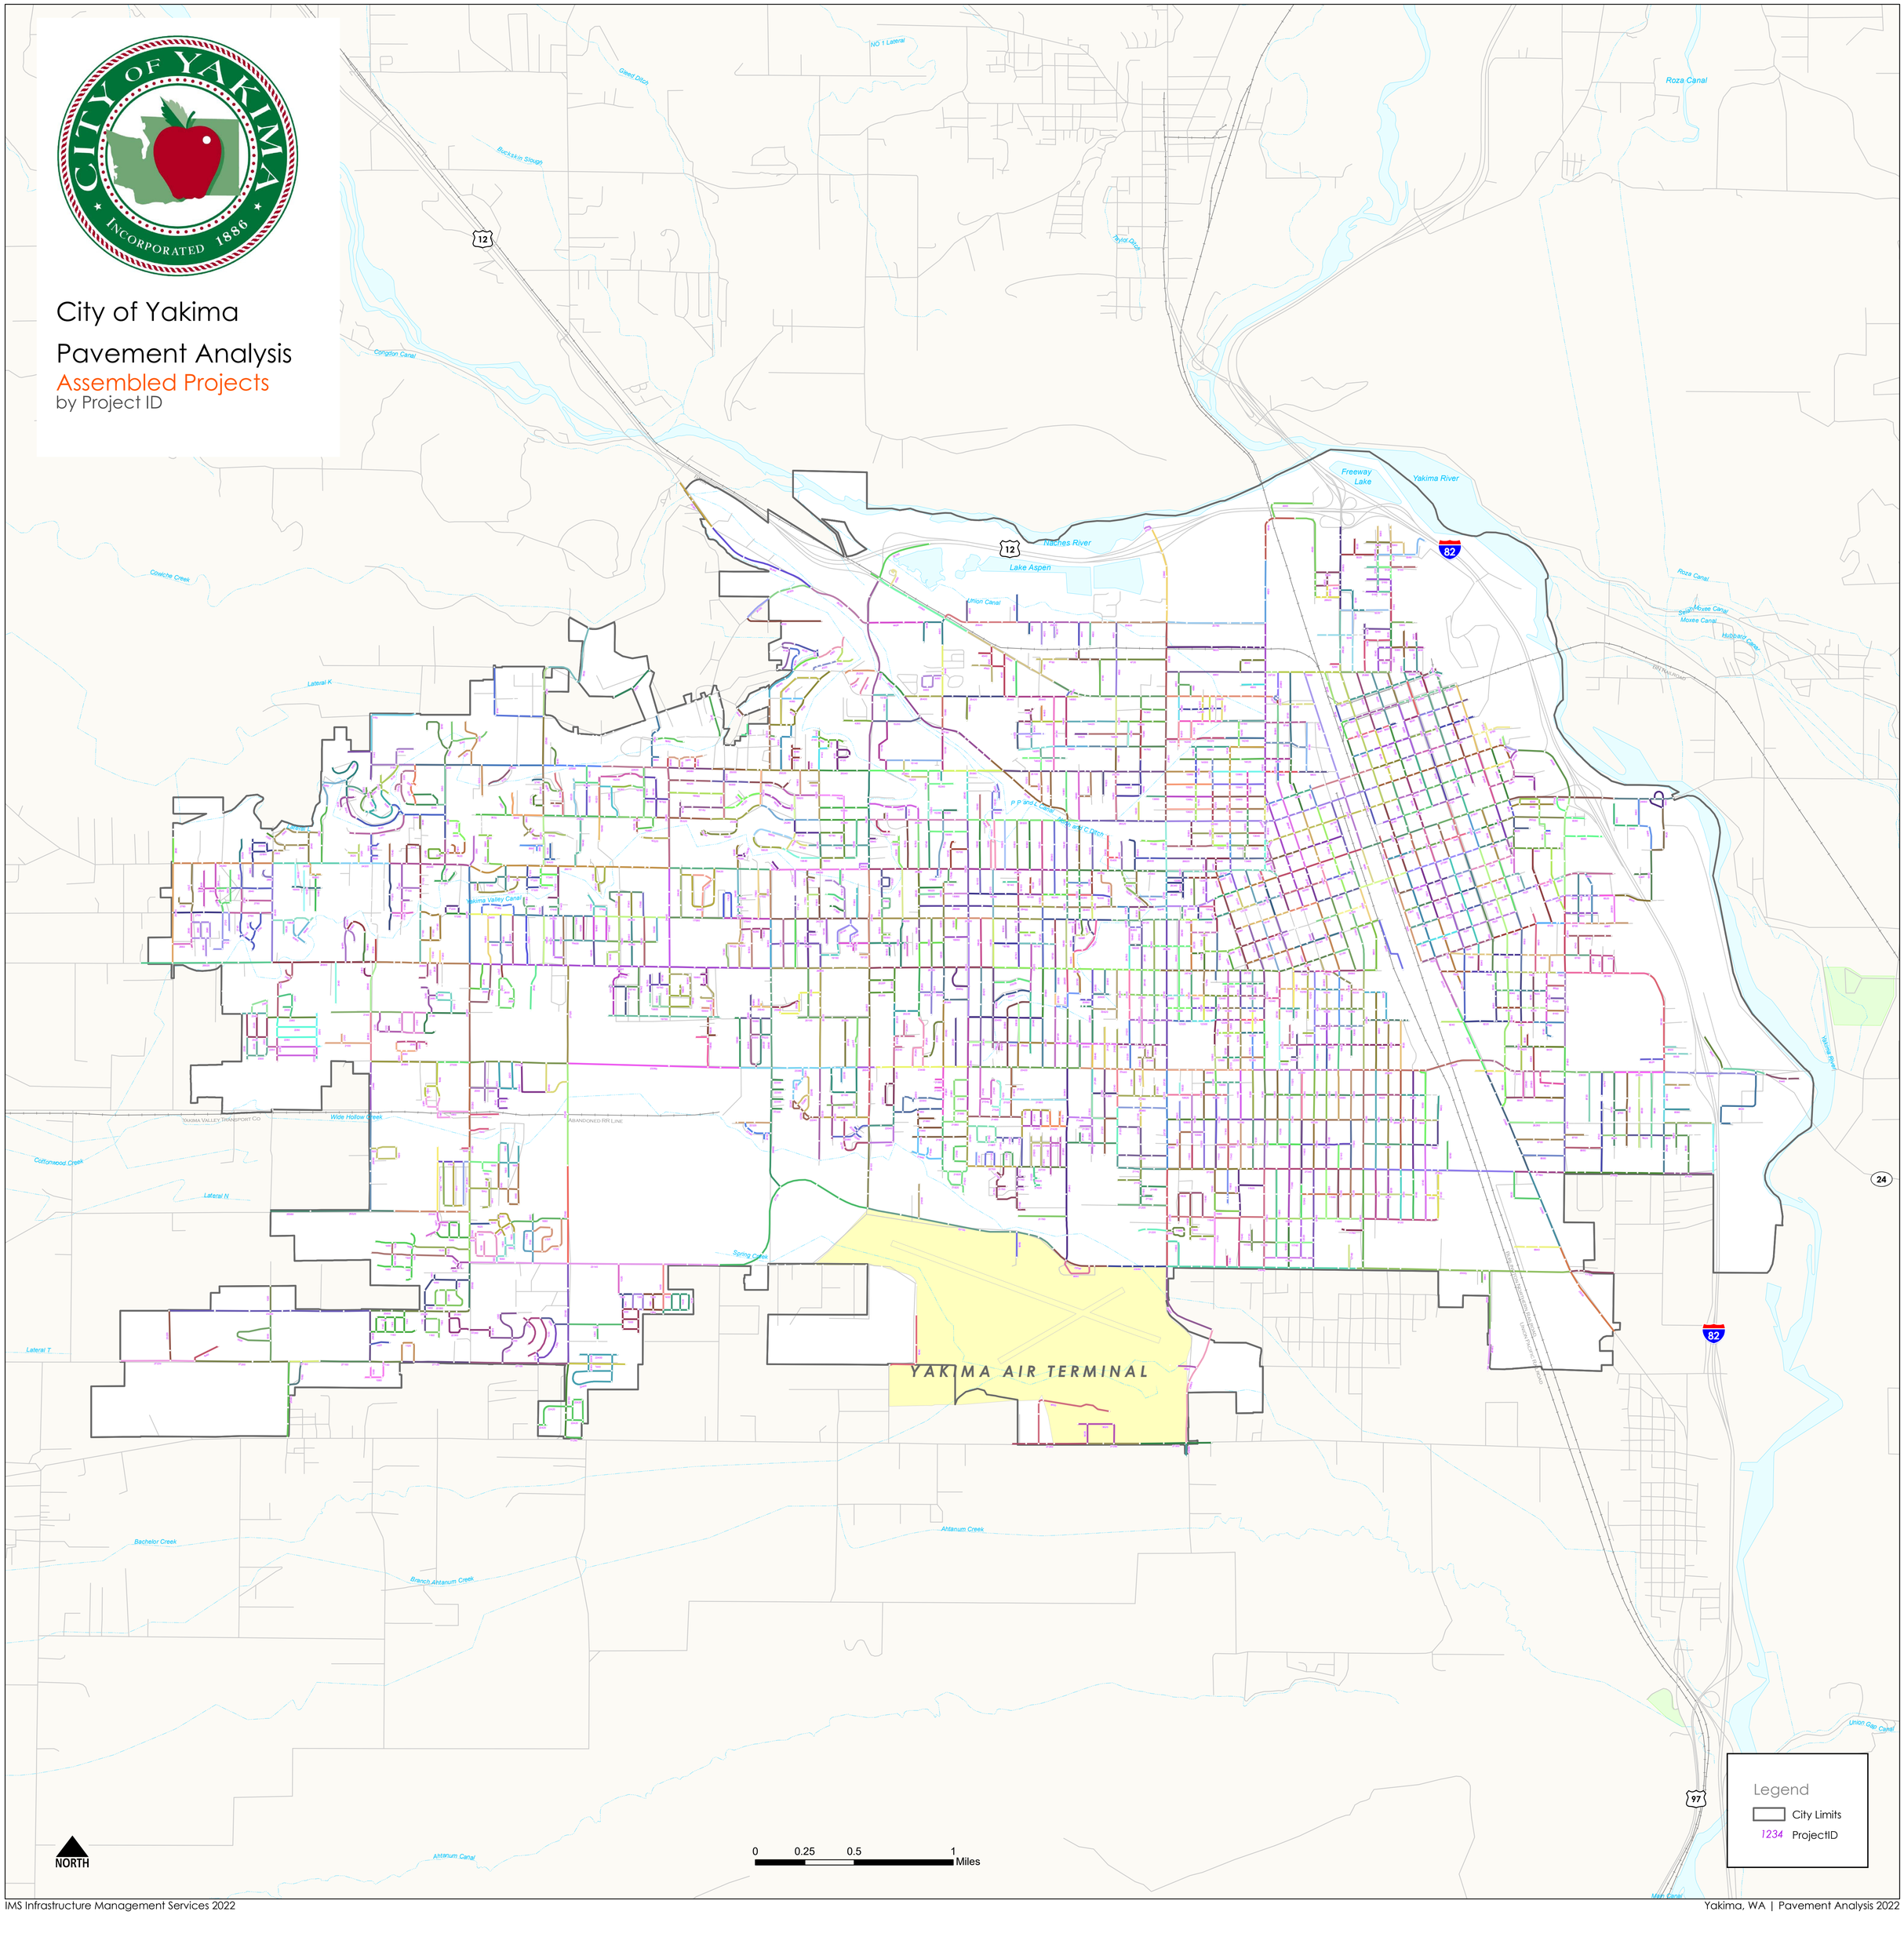


City of Yakima

Pavement Analysis

5-Year Rehab Plan: $2.7M Annual Budget

by Rehab Year and Activity

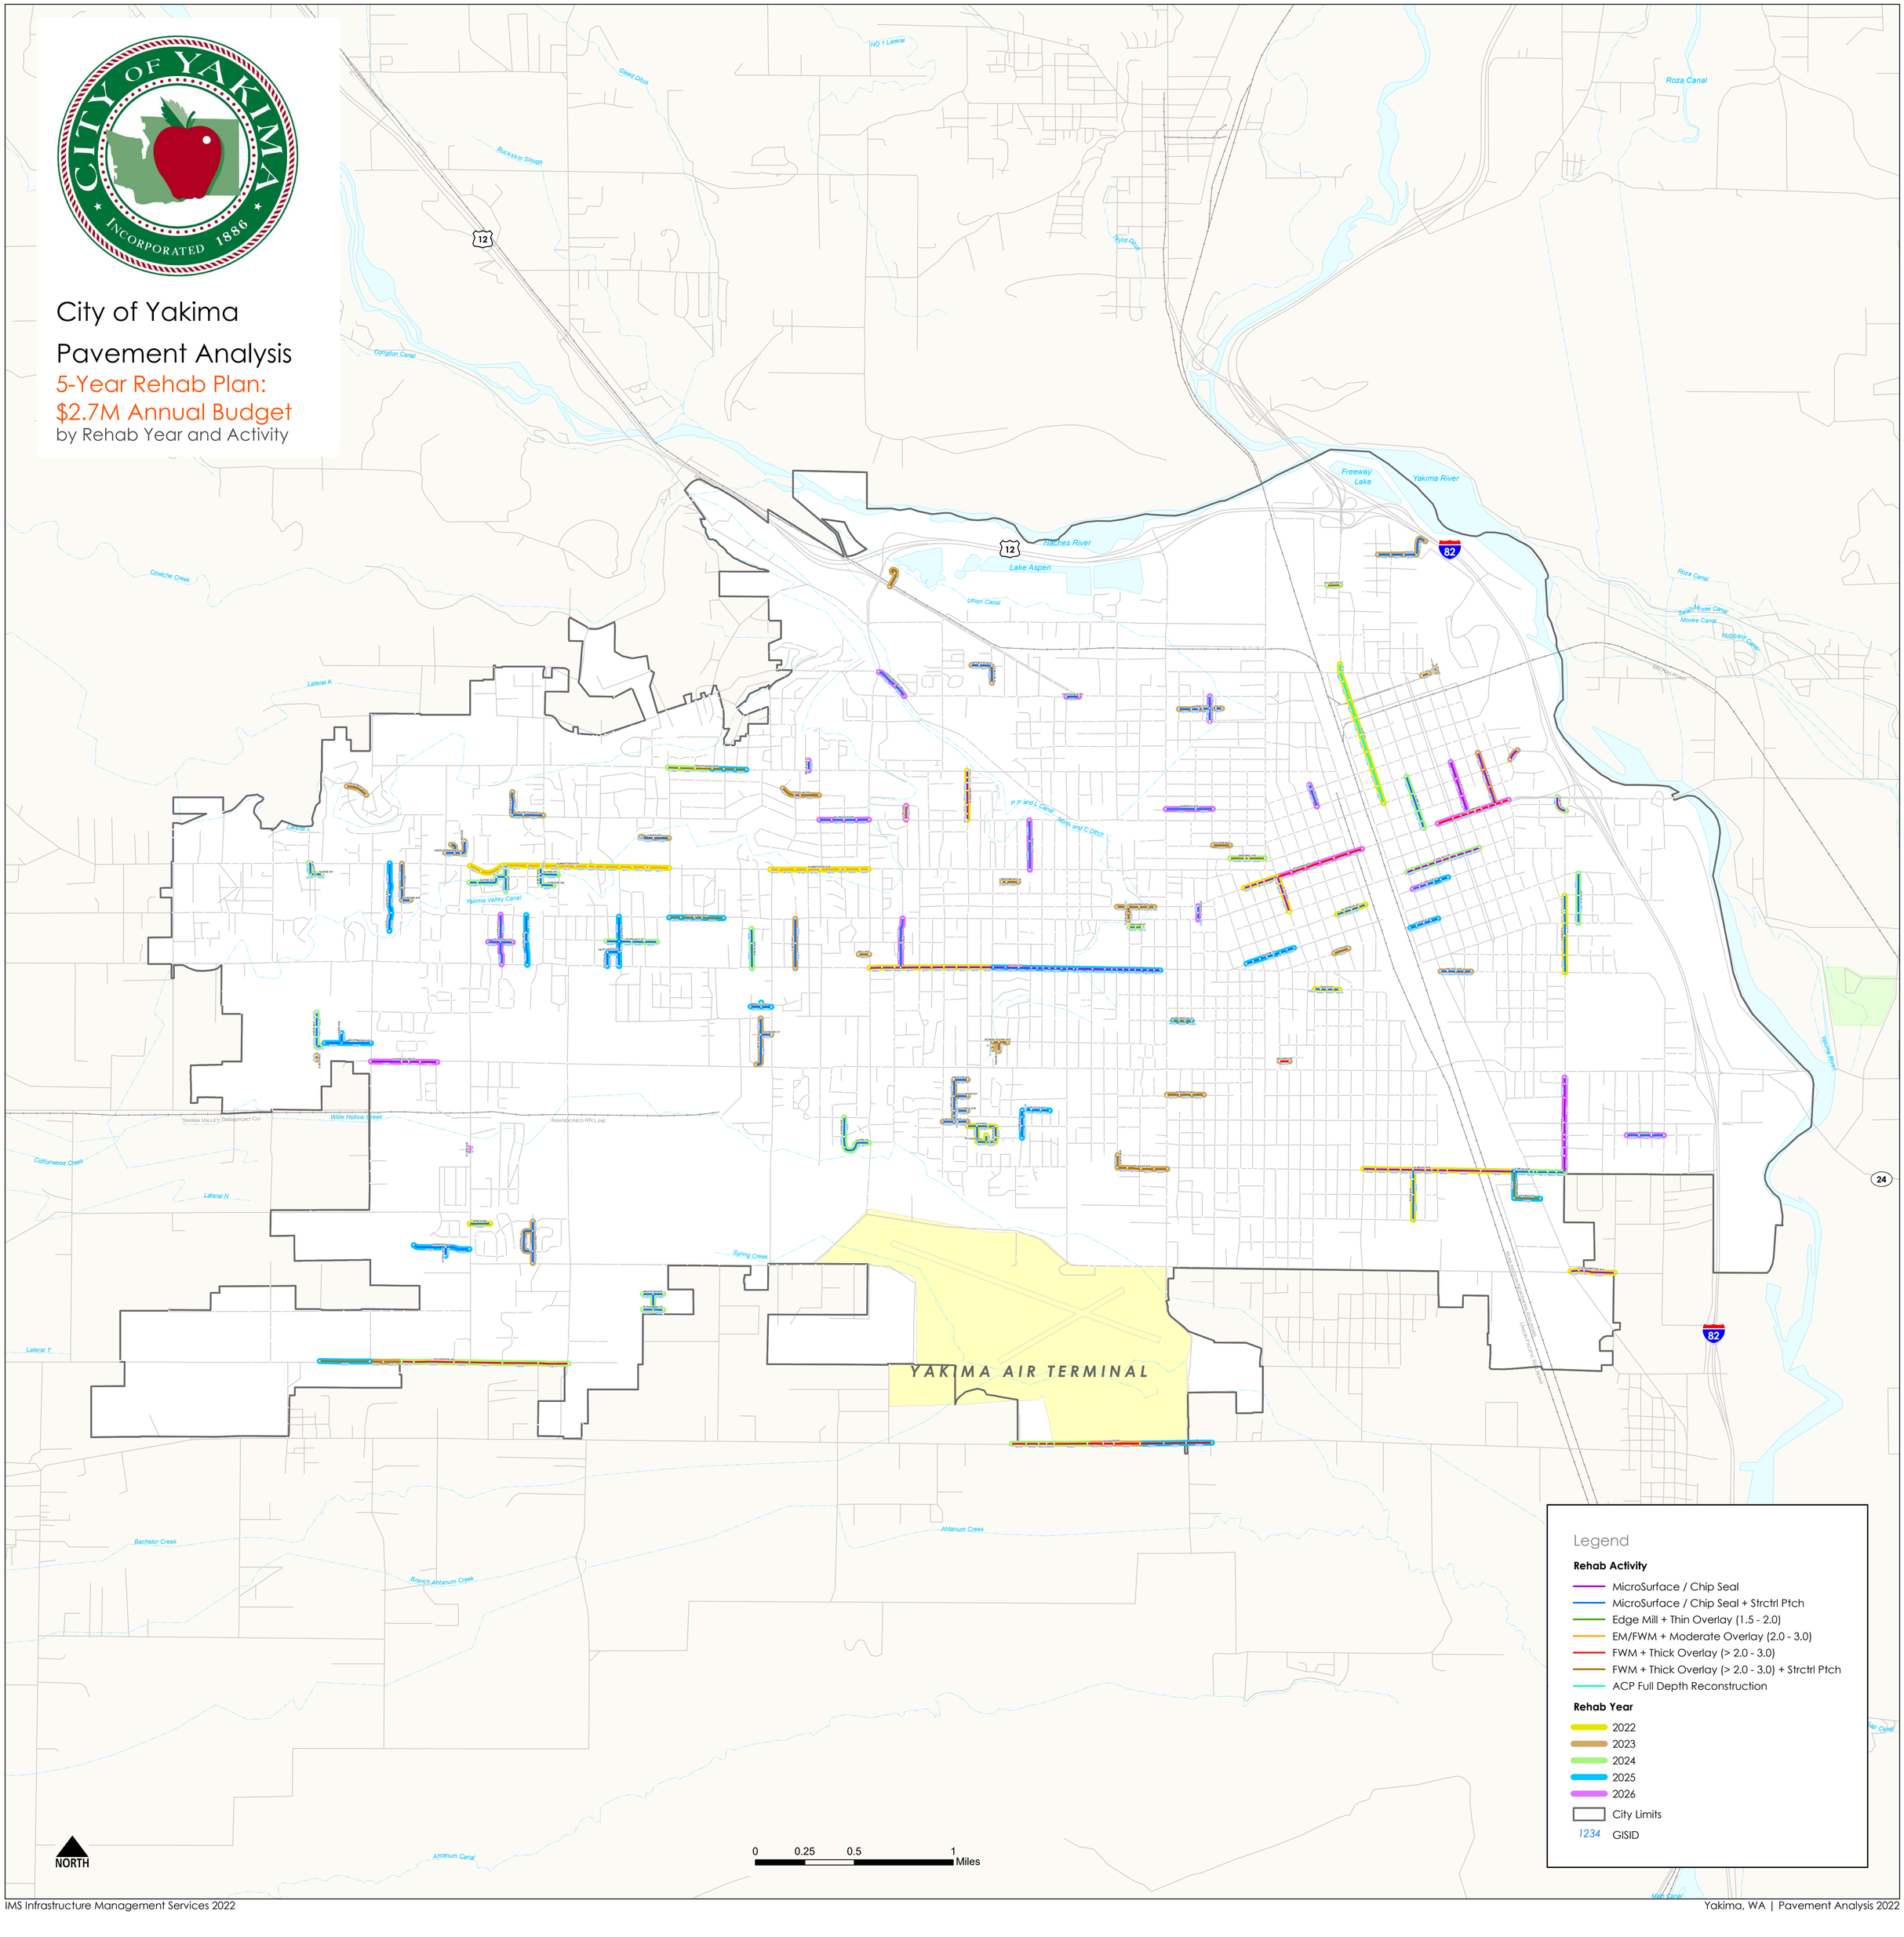

Legend

Rehab Activity

- MicroSurface / Chip Seal
- MicroSurface / Chip Seal + Strctrl Ptch
- Edge Mill + Thin Overlay (1.5 - 2.0)
- EM/FWM + Moderate Overlay (2.0 - 3.0)
- FWM + Thick Overlay (> 2.0 - 3.0)
- FWM + Thick Overlay (> 2.0 - 3.0) + Strctrl Ptch
- ACP Full Depth Reconstruction

Rehab Year

- 2022
- 2023
- 2024
- 2025
- 2026
- City Limits
- 1234 GISID

City of Yakima

Pavement Analysis

5-Year Post Rehab PCI:

$2.7M Annual Budget

by Segment

